


AMPTRON INTERNATIONAL, INC.

PII-2200

Device Type	Mainboard
Processor	Pentium II
Processor Speed	233/266/300/333/366/400/433/466/500/533MHz
Chip Set	Intel 440LX
Maximum Onboard Memory	1GB (EDO & SDRAM supported)
Cache	256/512KB (located on Pentium II CPU)
BIOS	AMI
Dimensions	305mm x 244mm
I/O Options	32-bit PCI slots (5), floppy drive interface, green PC connector, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), IR connector, USB connectors (2), ATX power connector, AGP slot, wake on LAN connector

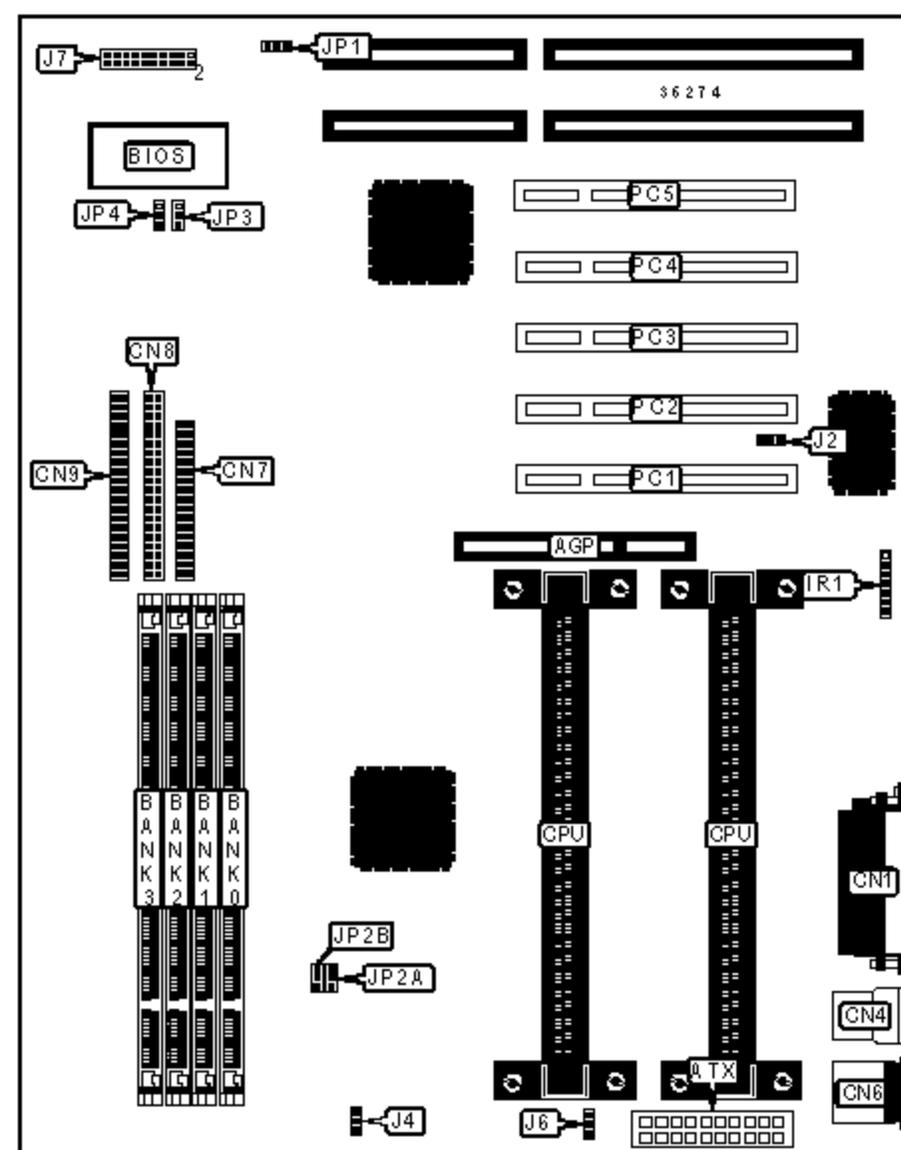

CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	IR connector	IR1
ATX power connector	ATX	Wake on LAN connector	J2

Parallel port	CN1	CPU fan power	J4
Serial port 2	CN2	CPU fan power	J6
Serial port 1	CN3	Speaker	J7/pins 1/3/5/7
USB connector 1	CN4	Power LED & keylock	J7/pins 2/4/6/8/10
USB connector 2	CN5	Turbo LED	J7/pins 13 & 14
PS/2 mouse port	CN6	IDE interface LED	J7/pins 15 & 16
Floppy drive interface	CN7	Reset switch	J7/pins 17 & 18
IDE interface 1	CN8	Green PC connector	J7/pins 19 & 20
IDE interface 2	CN9	32-bit PCI slots	PC1 - PC5

USER CONFIGURABLE SETTINGS

Function		Label	Position
»	Flash BIOS voltage select 5v	JP1	Pins 2 & 3 closed
	Flash BIOS voltage select 12v	JP1	Pins 1 & 2 closed
»	CMOS memory normal operation	JP3	Pins 1 & 2 closed
	CMOS memory clear	JP3	Pins 2 & 3 closed
	CPU SMI select PIIX4	JP4	Pins 1 & 2 closed
	CPU SMI select I/O APIC	JP4	Pins 2 & 3 closed

DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2	Bank 3
8MB	(1) 1M x 64	None	None	None
16MB	(1) 2M x 64	None	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None	None
24MB	(1) 2M x 64	(1) 1M x 64	None	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64	None
32MB	(1) 4M x 64	None	None	None

32MB	(1) 2M x 64	(1) 2M x 64	None	None
32MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
40MB	(1) 4M x 64	(1) 1M x 64	None	None
48MB	(1) 4M x 64	(1) 2M x 64	None	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64	None
64MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 8M x 64	None	None	None
64MB	(1) 4M x 64	(1) 4M x 64	None	None
72MB	(1) 8M x 64	(1) 1M x 64	None	None
80MB	(1) 8M x 64	(1) 2M x 64	None	None
96MB	(1) 8M x 64	(1) 4M x 64	None	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	None
128MB	(1) 16M x 64	None	None	None

DIMM CONFIGURATION (CON'T)

Size	Bank 0	Bank 1	Bank 2	Bank 3
128MB	(1) 8M x 64	(1) 8M x 64	None	None
128MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
136MB	(1) 16M x 64	(1) 1M x 64	None	None
144MB	(1) 16M x 64	(1) 2M x 64	None	None
176MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	None
256MB	(1) 32M x 64	None	None	None
256MB	(1) 16M x 64	(1) 16M x 64	None	None
256MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
272MB	(1) 16M x 64	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
280MB	(1) 32M x 64	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64

288MB	(1) 16M x 64	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
320MB	(1) 16M x 64	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	None
448MB	(1) 32M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
512MB	(1) 32M x 64	(1) 32M x 64	None	None
512MB	(1) 16M x 64			
640MB	(1) 32M x 64	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
768MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64	None
1024MB	(1) 32M x 64			

Note: Board accepts EDO & SDRAM memory. Maximum SDRAM is 512MB. Maximum EDO is 1024MB.

DIMM VOLTAGE CONFIGURATION

Voltage		JP2A	JP2B
»	3.3v	Pins 2 & 3 closed	Pins 2 & 3 closed
	5v	Pins 1 & 2 closed	Pins 1 & 2 closed

CACHE CONFIGURATION

Note: 256KB/512KB cache is located on the Pentium II CPU.