




- Company Profile
- Product
- BIOS
- Driver Download
- Technology Support
- User Manual
- HOME

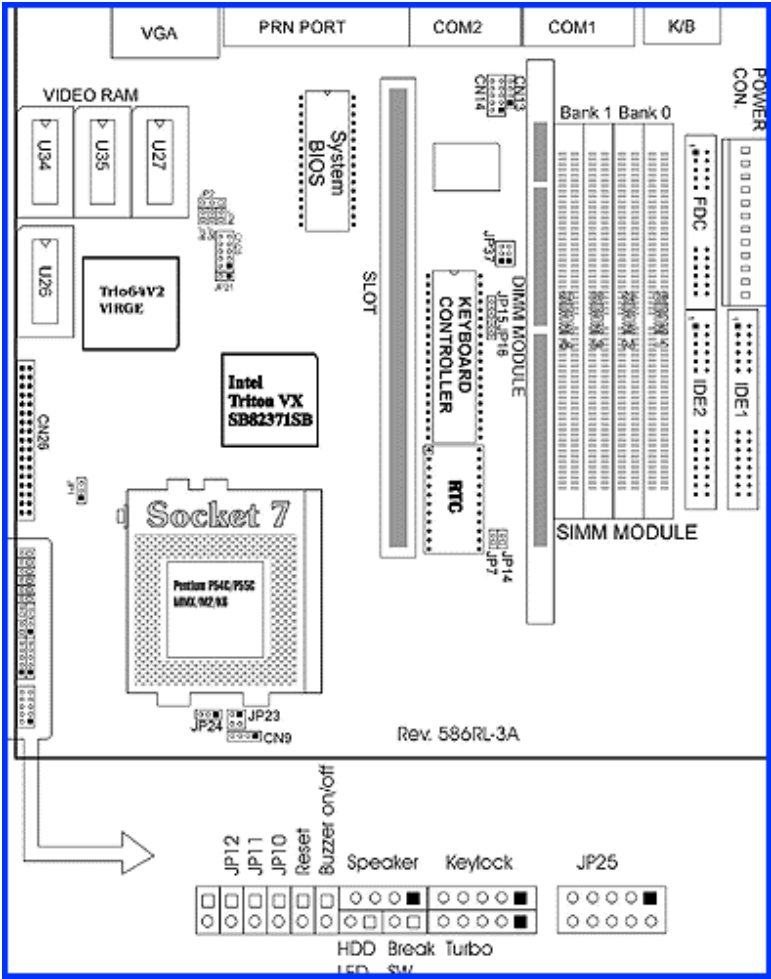

CPU RELATIVE JUMPER SETTING FOR 586RL REVISION 3A

JUMPERS DEFINE:

Function	Jumpers
CPU Power Type(Single/Dual)	JP23, JP24
CPU Voltage	JP25
CPU Clock Speed	JP4, JP5, JP6
CPU Ratio	JP10, JP11, JP12
Cache Size	JP13
SDRAM(DIMM) Voltage	JP37
Clear CMOS	JP7
ROM BIOS Type; Voltage; Size	JP2, JP8, JP9
ISA BUS Clock	JP14
PS/2 Mouse En/Disabled	JP15
Display Type	JP16
Hardware Reset	JP17
Hardware MPEG	JP21
Power Good	JP1

CONNECTORS DEFINE:

CN1 : PS/2 Keyboard Connector	CN18: IDE1
CN4 : FDD Connector	CN20: VGA Connector
CN5 : PS/2 Mouse Connector	CN21: IDE2
CN6 : PS/2 Mouse Header Connector(586RL only)	CN24: USB1 CN25: USB2
CN8 : COM1 or COM3	CN26: VGA Feature Connector
CN9 : Cooling Fan	CN27: Turbo LED/SW
CN12: COM2 or COM4	CN28: Hardware MPEG
CN13: I.R. Connector	CN29: Speaker
CN14: Feature I.R.	JP18: HDD LED
CN16: Printer Port	J1 : Key Lock

Note: Turbo LED/SW for front panels only**AMD K5 CPU Type/Clock Selector**

SYSTEM CLOCK	CPU TYPE	JP4	JP5	JP6	JP10	JP11	JP12
50MHz x 1.5	PR75	CLOSE	CLOSE	CLOSE	OPEN	OPEN	OPEN
60MHz x 1.5	PR90	CLOSE	CLOSE	OPEN	OPEN	OPEN	OPEN
66MHz x 1.5	PR100	CLOSE	OPEN	CLOSE	OPEN	OPEN	OPEN
60MHz x 1.5	PR120	CLOSE	CLOSE	OPEN	OPEN	OPEN	OPEN
66MHz x 1.5	PR133	CLOSE	OPEN	CLOSE	OPEN	OPEN	OPEN
60MHz x 2.5	PR150	CLOSE	CLOSE	OPEN	CLOSE	CLOSE	OPEN
66MHz x 2.5	PR166	CLOSE	OPEN	CLOSE	CLOSE	CLOSE	OPEN

Intel PENTIUM/MMX, AMD K6 CPU Type/Clock Selector

SYSTEM CLOCK	CPU TYPE	JP4	JP5	JP6	JP10	JP11	JP12
50MHz x 1.5	75MHz	CLOSE	CLOSE	CLOSE	OPEN	OPEN	OPEN
60MHz x 1.5	90MHz	CLOSE	CLOSE	OPEN	OPEN	OPEN	OPEN
66MHz x 1.5	100MHz	CLOSE	OPEN	CLOSE	OPEN	OPEN	OPEN
60MHz x 2.0	120MHz	CLOSE	CLOSE	OPEN	CLOSE	OPEN	OPEN
66MHz x 2.0	133MHz	CLOSE	OPEN	CLOSE	CLOSE	OPEN	OPEN
60MHz x 2.5	150MHz	CLOSE	CLOSE	OPEN	CLOSE	CLOSE	OPEN
66MHz x 2.5	166MHz	CLOSE	OPEN	CLOSE	CLOSE	CLOSE	OPEN
60MHz x 3.0	180MHz	CLOSE	CLOSE	OPEN	OPEN	CLOSE	OPEN
66MHz x 3.0	200MHz	CLOSE	OPEN	CLOSE	OPEN	CLOSE	OPEN
66MHz x 3.5	233MHz	CLOSE	OPEN	CLOSE	OPEN	OPEN	OPEN

66MHz x 4.0	266MHz	CLOSE	OPEN	CLOSE	CLOSE	OPEN	CLOSE
-------------	--------	-------	------	-------	-------	------	-------

Cyrix/IBM 6x86 M1/M2 CPU Type/Clock Selector

SYSTEM CLOCK	CPU TYPE	JP4	JP5	JP6	JP10	JP11	JP12
60MHz x 2.0	6x86-P150	CLOSE	CLOSE	OPEN	CLOSE	OPEN	OPEN
66MHz x 2.0	6x86-P166	CLOSE	OPEN	CLOSE	CLOSE	OPEN	OPEN
75MHz x 2.0	6x86-P200	OPEN	CLOSE	OPEN	CLOSE	OPEN	OPEN
66MHz x 2.0	M2-PR166	CLOSE	OPEN	CLOSE	CLOSE	OPEN	OPEN
60MHz x 2.5	M2-PR166	CLOSE	CLOSE	OPEN	CLOSE	CLOSE	OPEN
75MHz x 2.0	M2-PR200	OPEN	CLOSE	OPEN	CLOSE	OPEN	OPEN
66MHz x 2.5	M2-PR200	CLOSE	OPEN	CLOSE	CLOSE	CLOSE	OPEN
75MHz x 2.5	M2-PR233	OPEN	CLOSE	OPEN	CLOSE	CLOSE	OPEN
66MHz x 3.0	M2-PR233	CLOSE	OPEN	CLOSE	OPEN	CLOSE	OPEN
75MHz x 3.0	M2-PR266	OPEN	CLOSE	OPEN	OPEN	CLOSE	OPEN
66MHz x 3.5	M2-PR266	CLOSE	OPEN	CLOSE	OPEN	OPEN	OPEN

CPU Power Type(Single/Dual) Selector: JP23, JP24

SYSTEM	JP23	JP24	JP24
P54C	1-2/3-4	1-2	OPEN
P55C	1-3/2-4	2-3	CLOSE
SYSTEM	SYSTEM	586RL	586IL

[\[Continues.....\]](#)