


## P2BXA

<b>Device Type</b>	Mainboard
<b>Processor</b>	Pentium II
<b>Processor Speed</b>	233/266/300/333/350/400/450/500MHz
<b>Chip Set</b>	Intel 440BX
<b>Maximum Onboard Memory</b>	768MB (EDO & SDRAM supported)
<b>Cache</b>	256/512KB (located on Pentium II CPU)
<b>BIOS</b>	Award
<b>Dimensions</b>	305mm x 180mm
<b>I/O Options</b>	32-bit PCI slots (4), floppy drive interface, green PC connector, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), IR connector, USB connectors (2), ATX power connector, AGP slot, SB-link connector, wake on LAN connector

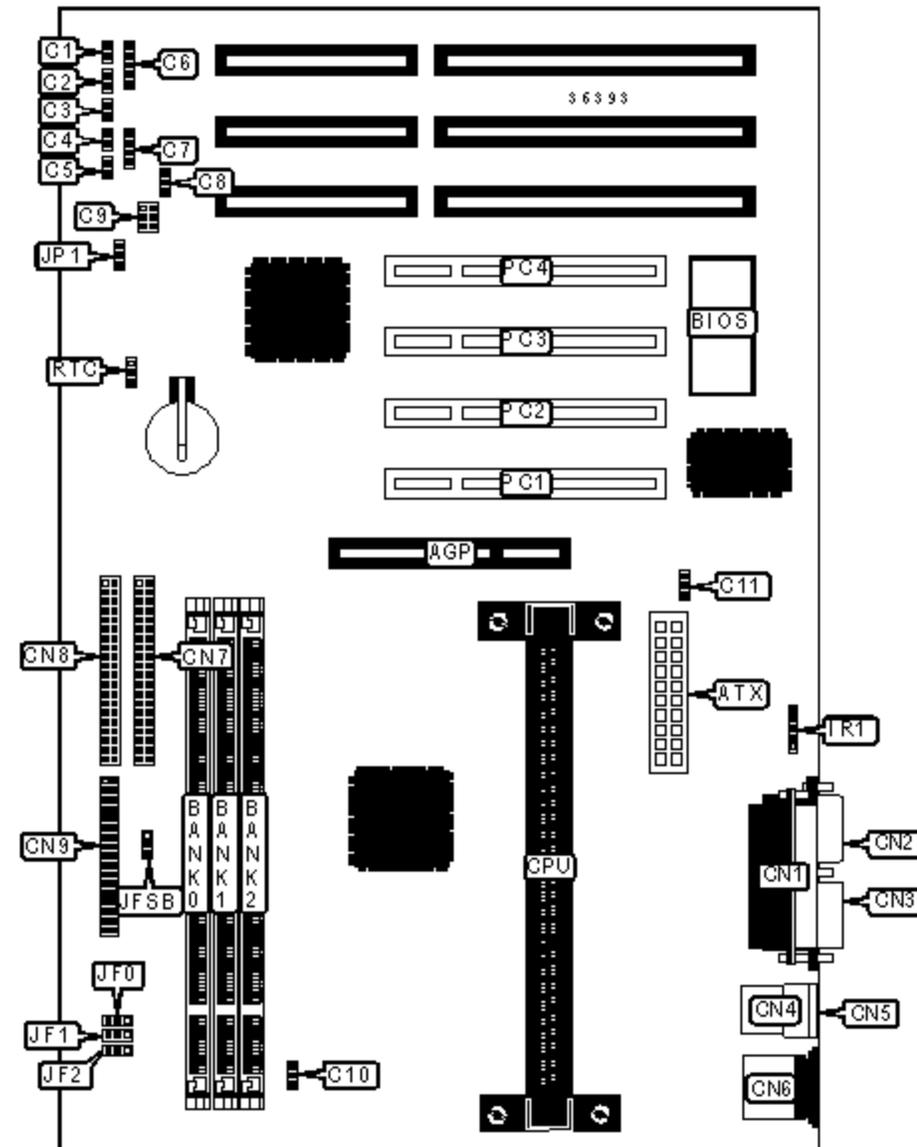

### CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	Parallel port	CN1
ATX power connector	ATX	Serial port 2	CN2

Green PC LED	C1	Serial port 1	CN3
Reset switch	C2	USB connector 1	CN4
IDE interface LED	C3	USB connector 2	CN5
Soft off power supply	C4	PS/2 mouse port	CN6
Green PC connector	C5	IDE interface 2	CN7
Power LED & keylock	C6	IDE interface 1	CN8
Speaker	C7	Floppy drive interface	CN9
Chassis fan power	C8	IR connector	IR1
SB-link connector	C9	Wake on LAN connector	JP1
CPU fan power	C10	32-bit PCI slots	PC1 - PC4
Power fan power	C11		

### USER CONFIGURABLE SETTINGS

Function		Label	Position
»	Factory configured - do not alter	JFSB	Unidentified
»	CMOS memory normal operation	RTC	Pins 2 & 3 closed
	CMOS memory clear	RTC	Pins 1 & 2 closed

### DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None
16MB	(1) 2M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
24MB	(1) 2M x 64	(1) 1M x 64	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None	None
32MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64

32MB	(1) 2M x 64	(1) 2M x 64	None
40MB	(1) 4M x 64	(1) 1M x 64	None
40MB	(1) 2M x 64	(1) 2M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 2M x 64	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
56MB	(1) 4M x 64	(1) 2M x 64	(1) 1M x 64
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 4M x 64	(1) 4M x 64	None
72MB	(1) 8M x 64	(1) 1M x 64	None
72MB	(1) 4M x 64	(1) 4M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64	None
80MB	(1) 4M x 64	(1) 4M x 64	(1) 2M x 64
88MB	(1) 8M x 64	(1) 2M x 64	(1) 1M x 64
96MB	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
96MB	(1) 8M x 64	(1) 4M x 64	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64

### DIMM CONFIGURATION (CON'T)

Size	Bank 0	Bank 1	Bank 2
104MB	(1) 8M x 64	(1) 4M x 64	(1) 1M x 64
112MB	(1) 8M x 64	(1) 4M x 64	(1) 2M x 64
128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None
136MB	(1) 16M x 64	(1) 1M x 64	None

136MB	(1) 8M x 64	(1) 8M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 2M x 64	None
144MB	(1) 8M x 64	(1) 8M x 64	(1) 2M x 64
152MB	(1) 16M x 64	(1) 2M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
160MB	(1) 16M x 64	(1) 4M x 64	None
160MB	(1) 8M x 64	(1) 8M x 64	(1) 4M x 64
168MB	(1) 16M x 64	(1) 4M x 64	(1) 1M x 64
176MB	(1) 16M x 64	(1) 4M x 64	(1) 2M x 64
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
200MB	(1) 16M x 64	(1) 8M x 64	(1) 1M x 64
208MB	(1) 16M x 64	(1) 8M x 64	(1) 2M x 64
224MB	(1) 16M x 64	(1) 8M x 64	(1) 4M x 64
256MB	(1) 32M x 64	None	None
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
264MB	(1) 32M x 64	(1) 1M x 64	None
272MB	(1) 32M x 64	(1) 1M x 64	(1) 1M x 64
272MB	(1) 32M x 64	(1) 2M x 64	None
288MB	(1) 32M x 64	(1) 2M x 64	(1) 2M x 64
288MB	(1) 32M x 64	(1) 4M x 64	None
320MB	(1) 32M x 64	(1) 4M x 64	(1) 4M x 64
320MB	(1) 32M x 64	(1) 8M x 64	None
384MB	(1) 32M x 64	(1) 8M x 64	(1) 8M x 64
384MB	(1) 32M x 64	(1) 16M x 64	None
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
512MB	(1) 32M x 64	(1) 16M x 64	(1) 16M x 64

512MB	(1) 32M x 64	(1) 32M x 64	None
768MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64
Note: Board accepts EDO & SDRAM memory.			

**CACHE CONFIGURATION**

Note: 256KB/512KB cache is located on the Pentium II CPU.

**CPU SPEED SELECTION**

CPU speed	Clock speed	Multiplier	JF0	JF1	JF2
233MHz	66MHz	3.5x	1 & 2	2 & 3	2 & 3
266MHz	66MHz	4x	2 & 3	1 & 2	1 & 2
300MHz	66MHz	4.5x	2 & 3	1 & 2	2 & 3
333MHz	66MHz	5x	2 & 3	2 & 3	1 & 2
350MHz	100MHz	3.5x	1 & 2	2 & 3	2 & 3
400MHz	100MHz	4x	2 & 3	1 & 2	1 & 2
450MHz	100MHz	4.5x	2 & 3	1 & 2	2 & 3
500MHz	100MHz	5x	2 & 3	2 & 3	1 & 2

Note: Pins designated should be in the closed position.