


DIAMOND FLOWER, INC.

P2XBL/S (REV. A+)

Configuration

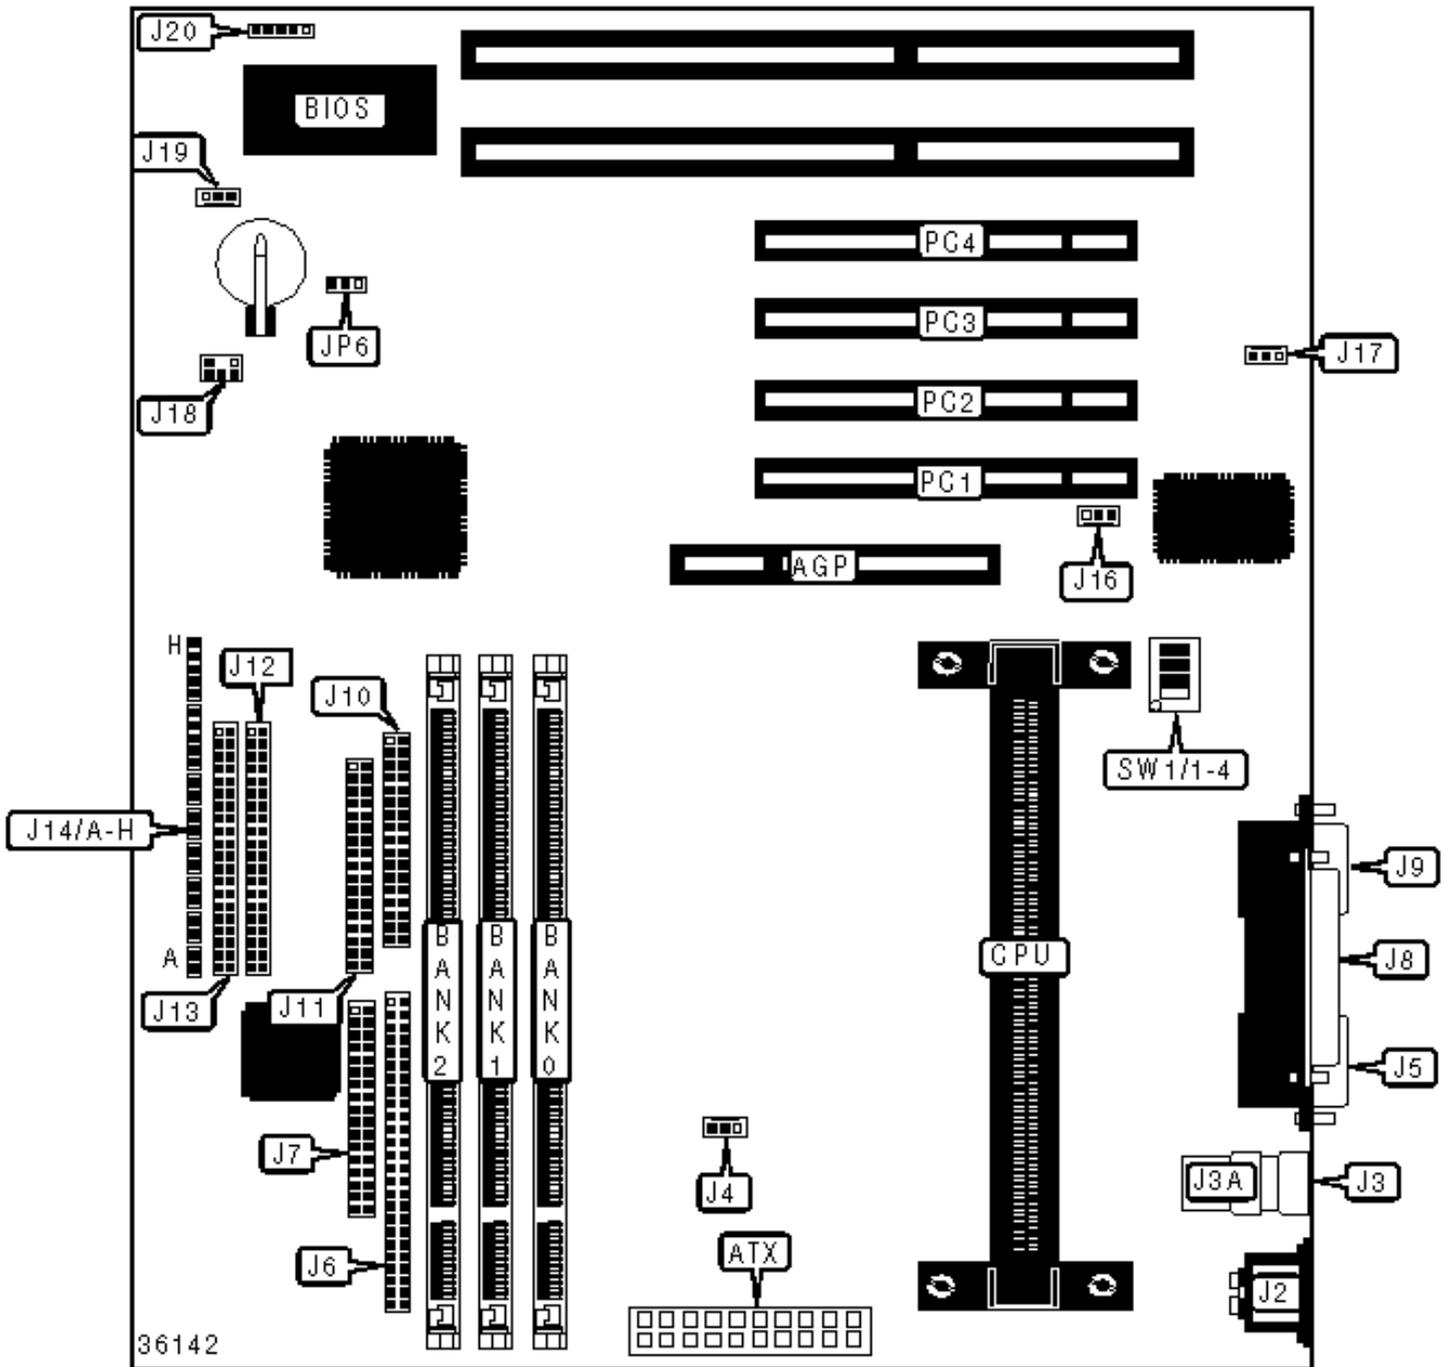

## CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	ATX power LED	J14/A
ATX power	ATX	IDE interface LED	J14/B
PS/2 mouse port	J2	Green PC LED	J14/C
USB connector 1	J3	ATX power switch	J14/D
USB connector 2	J3A	Green PC switch	J14/E
CPU fan power	J4	Reset switch	J14/F
Serial port 1	J5	Speaker	J14/G
Ultra Narrow SCSI interface	J6	Power LED & keylock	J14/H
Ultra Wide SCSI interface	J7	AGP fan power	J16
Parallel port	J8	Wake on LAN connector	J17
Serial port 2	J9	SB link connector	J18
Floppy drive interface	J10	Chassis fan power	J19
SCSI Ultra-2 interface	J11	IR connector	J20
IDE interface 2	J12	32-bit PCI slots	PC1 - PC4
IDE interface 1	J13		

## USER CONFIGURABLE SETTINGS

Function	Label	Position
» CMOS memory normal operation	JP6	Pins 1 & 2 closed
CMOS memory clear	JP6	Pins 2 & 3 closed

## DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None

16MB	(1) 1M x 64	(1) 1M x 64	None
16MB	(1) 2M x 64	None	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
24MB	(1) 2M x 64	(1) 1M x 64	None
32MB	(1) 2M x 64	(1) 2M x 64	None
32MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None	None
40MB	(1) 2M x 64	(1) 2M x 64	(1) 1M x 64
40MB	(1) 4M x 64	(1) 1M x 64	None
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 2M x 64	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
56MB	(1) 4M x 64	(1) 2M x 64	(1) 1M x 64
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 4M x 64	(1) 4M x 64	None
64MB	(1) 8M x 64	None	None
72MB	(1) 8M x 64	(1) 1M x 64	None
80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64	None
88MB	(1) 8M x 64	(1) 2M x 64	(1) 1M x 64
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
96MB	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
96MB	(1) 8M x 64	(1) 4M x 64	None

**DIMM CONFIGURATION (CON'T)**

Size	Bank 0	Bank 1	Bank 2
------	--------	--------	--------

104MB	(1) 8M x 64	(1) 4M x 64	(1) 1M x 64
112MB	(1) 8M x 64	(1) 4M x 64	(1) 2M x 64
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None
128MB	(1) 16M x 64	None	None
136MB	(1) 8M x 64	(1) 8M x 64	(1) 1M x 64
136MB	(1) 16M x 64	(1) 1M x 64	None
144MB	(1) 8M x 64	(1) 8M x 64	(1) 2M x 64
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 2M x 64	None
152MB	(1) 16M x 64	(1) 2M x 64	(1) 1M x 64
160MB	(1) 8M x 64	(1) 8M x 64	(1) 4M x 64
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
160MB	(1) 16M x 64	(1) 4M x 64	None
168MB	(1) 16M x 64	(1) 4M x 64	(1) 1M x 64
176MB	(1) 16M x 64	(1) 4M x 64	(1) 2M x 64
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
200MB	(1) 16M x 64	(1) 8M x 64	(1) 1M x 64
208MB	(1) 16M x 64	(1) 8M x 64	(1) 2M x 64
224MB	(1) 16M x 64	(1) 8M x 64	(1) 4M x 64
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
256MB	(1) 16M x 64	(1) 16M x 64	None
264MB	(1) 16M x 64	(1) 16M x 64	(1) 1M x 64
272MB	(1) 16M x 64	(1) 16M x 64	(1) 2M x 64

288MB	(1) 16M x 64	(1) 16M x 64	(1) 4M x 64
320MB	(1) 16M x 64	(1) 16M x 64	(1) 8M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64

### CACHE CONFIGURATION

Note: 256/512KB cache is located on the Pentium II CPU.

### CPU SPEED SELECTION

CPU speed	Clock speed	Multiplier	SW1/1	SW1/2	SW1/3	SW1/4
233MHz	66MHz	3.5x	Off	Off	On	On
266MHz	66MHz	4x	On	On	Off	On
300MHz	66MHz	4.5x	Off	On	Off	On
300MHz	100MHz	3x	On	Off	On	On
333MHz	66MHz	5x	On	Off	Off	On
350MHz	100MHz	3.5x	Off	Off	On	On
400MHz	100MHz	4x	On	On	Off	On
450MHz	100MHz	4.5x	Off	On	Off	On