


# EPOX COMPUTER CO., LTD.

## EP-MVP3G-M

**Device Type** Mainboard  
**Processor** CX 6X86MX/CX MII/IBM MII/IDT C6/AM K5/AM K6/Pentium/  
 Pentium MMX  
**Processor Speed** 166/200/233/250/266/300/333/350/366/400/450/500MHZ  
**Chip Set** VIA MVP3  
**Maximum Onboard Memory** 384MB (EDO & SDRAM supported)  
**Cache** 1024KB  
**BIOS** Award  
**Dimensions** 305mm x 244mm  
**I/O Options** 32-bit PCI slots (5), floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), IR connector, USB connectors (2), ATX power connector, AGP slot, SB-link connector, wake on LAN connector

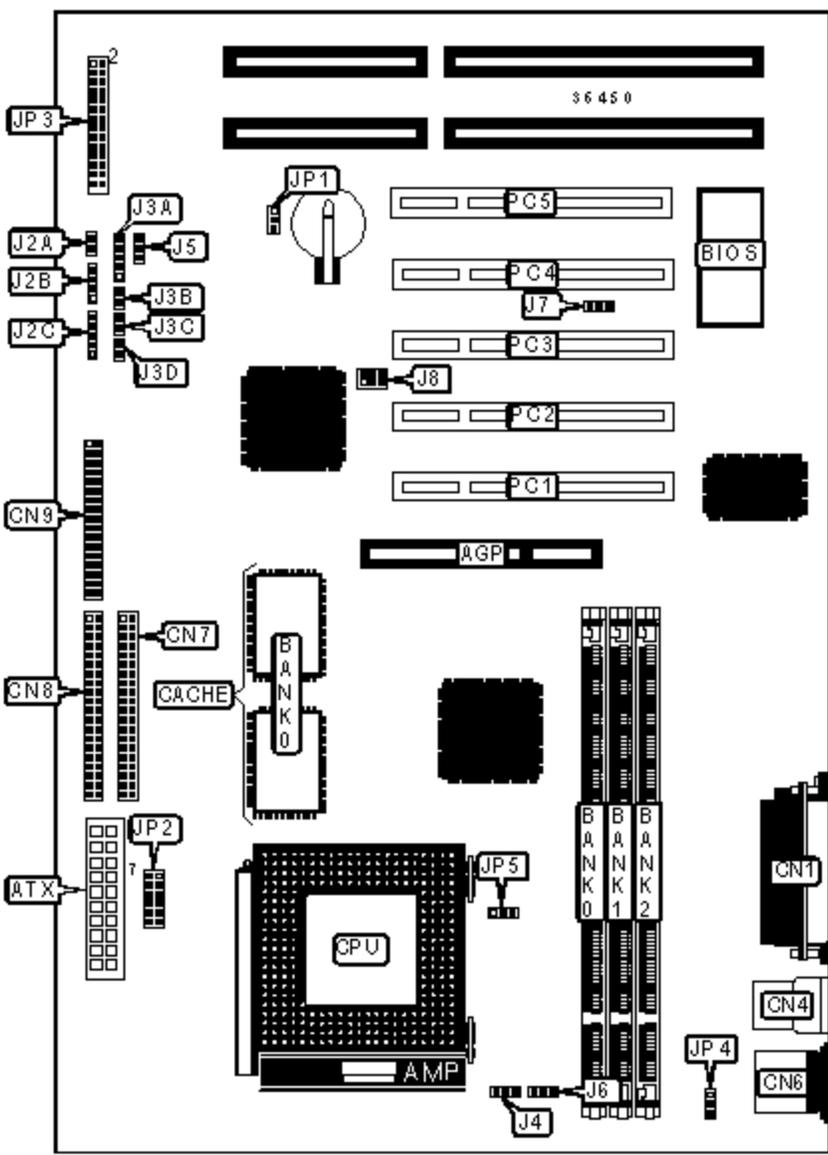

### CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	Speaker	J2B

ATX power connector	ATX	Power LED & keylock	J2C
Parallel port	CN1	IR connector	J3A
Serial port 2	CN2	IDE interface LED	J3B
Serial port 1	CN3	Turbo LED	J3C
USB connector 1	CN4	Soft off power supply	J3D
USB connector 2	CN5	CPU fan power	J4
PS/2 mouse port	CN6	Power fan power	J5
IDE interface 2	CN7	Chassis fan power	J6
IDE interface 1	CN8	Wake on LAN connector	J7
Floppy drive interface	CN9	SB-link connector	J8
Reset switch	J2A	32-bit PCI slots	PC1 – PC5

### USER CONFIGURABLE SETTINGS

Function		Label	Position
»	Factory configured - do not alter	JP1	Unidentified
»	Keyboard power on disabled	JP4	Pins 1 & 2 closed
	Keyboard power on enabled	JP4	Pins 2 & 3 closed
»	SDRAM clock = CPU clock	JP5	Pins 1 & 2 closed
	SDRAM clock = AGP clock	JP5	Pins 2 & 3 closed

### DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None
16MB	(1) 2M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
24MB	(1) 2M x 64	(1) 1M x 64	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64

32MB	(1) 4M x 64	None	None
32MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 2M x 64	(1) 2M x 64	None
40MB	(1) 4M x 64	(1) 1M x 64	None
40MB	(1) 2M x 64	(1) 2M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 2M x 64	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
56MB	(1) 4M x 64	(1) 2M x 64	(1) 1M x 64
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 4M x 64	(1) 4M x 64	None
72MB	(1) 8M x 64	(1) 1M x 64	None
72MB	(1) 4M x 64	(1) 4M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64	None
80MB	(1) 4M x 64	(1) 4M x 64	(1) 2M x 64
88MB	(1) 8M x 64	(1) 2M x 64	(1) 1M x 64
96MB	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64

### DIMM CONFIGURATION (CON'T)

Size	Bank 0	Bank 1	Bank 2
96MB	(1) 8M x 64	(1) 4M x 64	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
104MB	(1) 8M x 64	(1) 4M x 64	(1) 1M x 64
112MB	(1) 8M x 64	(1) 4M x 64	(1) 2M x 64
128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64

128MB	(1) 8M x 64	(1) 8M x 64	None
136MB	(1) 16M x 64	(1) 1M x 64	None
136MB	(1) 8M x 64	(1) 8M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 2M x 64	None
144MB	(1) 8M x 64	(1) 8M x 64	(1) 2M x 64
152MB	(1) 16M x 64	(1) 2M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
160MB	(1) 16M x 64	(1) 4M x 64	None
160MB	(1) 8M x 64	(1) 8M x 64	(1) 4M x 64
168MB	(1) 16M x 64	(1) 4M x 64	(1) 1M x 64
176MB	(1) 16M x 64	(1) 4M x 64	(1) 2M x 64
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
200MB	(1) 16M x 64	(1) 8M x 64	(1) 1M x 64
208MB	(1) 16M x 64	(1) 8M x 64	(1) 2M x 64
224MB	(1) 16M x 64	(1) 8M x 64	(1) 4M x 64
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64

Note: Board accepts EDO & SDRAM memory.

#### CACHE CONFIGURATION

Size	Bank 0
1MB	(2) 64K x 64

#### CPU SPEED SELECTION (CX 6X86MX)

CPU speed	Clock speed	Multiplier	JP3

200MHz	66MHz	2.5x	Pins 3 & 4, 17 & 18 closed
233MHz	75MHz	2.5x	Pins 3 & 4, 19 & 20 closed
233MHz	66MHz	3x	Pins 5 & 6, 17 & 18 closed
266MHz	83MHz	2.5x	Pins 3 & 4, 21 & 22 closed
266MHz	75MHz	3x	Pins 5 & 6, 19 & 20 closed
300MHz	66MHz	3.5x	Pins 7 & 8, 17 & 18 closed
333MHz	100MHz	2.5x	Pins 3 & 4, 25 & 26 closed
333MHz	83MHz	3x	Pins 5 & 6, 21 & 22 closed
333MHz	75MHz	3.5x	Pins 7 & 8, 19 & 20 closed
333MHz	66MHz	4x	Pins 9 & 10, 17 & 18 closed
350MHz	100MHz	3x	Pins 5 & 6, 25 & 26 closed
350MHz	83MHz	3.5x	Pins 7 & 8, 21 & 22 closed
350MHz	75MHz	4x	Pins 9 & 10, 19 & 20 closed

**CPU SPEED SELECTION (IBM 6X86MX)**

<b>CPU speed</b>	<b>Clock speed</b>	<b>Multiplier</b>	<b>JP3</b>
200MHz	66MHz	2.5x	Pins 3 & 4, 17 & 18 closed
233MHz	75MHz	2.5x	Pins 3 & 4, 19 & 20 closed
233MHz	66MHz	3x	Pins 5 & 6, 17 & 18 closed
266MHz	83MHz	2.5x	Pins 3 & 4, 21 & 22 closed
266MHz	75MHz	3x	Pins 5 & 6, 19 & 20 closed
300MHz	66MHz	3.5x	Pins 7 & 8, 17 & 18 closed
333MHz	100MHz	2.5x	Pins 3 & 4, 25 & 26 closed
333MHz	83MHz	3x	Pins 5 & 6, 21 & 22 closed
333MHz	75MHz	3.5x	Pins 7 & 8, 19 & 20 closed
333MHz	66MHz	4x	Pins 9 & 10, 17 & 18 closed
350MHz	100MHz	3x	Pins 5 & 6, 25 & 26 closed
350MHz	83MHz	3.5x	Pins 7 & 8, 21 & 22 closed

350MHz	75MHz	4x	Pins 9 & 10, 19 & 20 closed
--------	-------	----	-----------------------------

<b>CPU SPEED SELECTION (CX MII)</b>			
-------------------------------------	--	--	--

<b>CPU speed</b>	<b>Clock speed</b>	<b>Multiplier</b>	<b>JP3</b>
200MHz	66MHz	2.5x	Pins 3 & 4, 17 & 18 closed
233MHz	75MHz	2.5x	Pins 3 & 4, 19 & 20 closed
233MHz	66MHz	3x	Pins 5 & 6, 17 & 18 closed
266MHz	83MHz	2.5x	Pins 3 & 4, 21 & 22 closed
266MHz	75MHz	3x	Pins 5 & 6, 19 & 20 closed
300MHz	66MHz	3.5x	Pins 7 & 8, 17 & 18 closed
333MHz	100MHz	2.5x	Pins 3 & 4, 25 & 26 closed
333MHz	83MHz	3x	Pins 5 & 6, 21 & 22 closed
333MHz	75MHz	3.5x	Pins 7 & 8, 19 & 20 closed
333MHz	66MHz	4x	Pins 9 & 10, 17 & 18 closed
350MHz	100MHz	3x	Pins 5 & 6, 25 & 26 closed
350MHz	83MHz	3.5x	Pins 7 & 8, 21 & 22 closed
350MHz	75MHz	4x	Pins 9 & 10, 19 & 20 closed

<b>CPU SPEED SELECTION (IBM MII)</b>			
--------------------------------------	--	--	--

<b>CPU speed</b>	<b>Clock speed</b>	<b>Multiplier</b>	<b>JP3</b>
200MHz	66MHz	2.5x	Pins 3 & 4, 17 & 18 closed
233MHz	75MHz	2.5x	Pins 3 & 4, 19 & 20 closed
233MHz	66MHz	3x	Pins 5 & 6, 17 & 18 closed
266MHz	83MHz	2.5x	Pins 3 & 4, 21 & 22 closed
266MHz	75MHz	3x	Pins 5 & 6, 19 & 20 closed
300MHz	66MHz	3.5x	Pins 7 & 8, 17 & 18 closed
333MHz	100MHz	2.5x	Pins 3 & 4, 25 & 26 closed
333MHz	83MHz	3x	Pins 5 & 6, 21 & 22 closed

333MHz	75MHz	3.5x	Pins 7 & 8, 19 & 20 closed
333MHz	66MHz	4x	Pins 9 & 10, 17 & 18 closed
350MHz	100MHz	3x	Pins 5 & 6, 25 & 26 closed
350MHz	83MHz	3.5x	Pins 7 & 8, 21 & 22 closed
350MHz	75MHz	4x	Pins 9 & 10, 19 & 20 closed

<b>CPU SPEED SELECTION (IDT C6)</b>			
<b>CPU speed</b>	<b>Clock speed</b>	<b>Multiplier</b>	<b>JP3</b>
200MHz	66MHz	3x	Pins 5 & 6, 17 & 18 closed
250MHz	75MHz	3x	Pins 5 & 6, 19 & 20 closed

<b>CPU SPEED SELECTION (AM K5)</b>			
<b>CPU speed</b>	<b>Clock speed</b>	<b>Multiplier</b>	<b>JP3</b>
166MHz	66MHz	2.5x	Pins 3 & 4, 17 & 18 closed

<b>CPU SPEED SELECTION (AM K6)</b>			
<b>CPU speed</b>	<b>Clock speed</b>	<b>Multiplier</b>	<b>JP3</b>
166MHz	66MHz	2.5x	Pins 3 & 4, 17 & 18 closed
200MHz	66MHz	3x	Pins 5 & 6, 17 & 18 closed
266MHz	66MHz	4x	Pins 9 & 10, 17 & 18 closed
300MHz	66MHz	4.5x	Pins 11 & 12, 17 & 18 closed
333MHz	66MHz	5x	Pins 13 & 14, 17 & 18 closed

<b>CPU SPEED SELECTION (INTEL)</b>			
<b>CPU speed</b>	<b>Clock speed</b>	<b>Multiplier</b>	<b>JP3</b>
166MHz	66MHz	2.5x	Pins 3 & 4, 17 & 18 closed

200MHz	66MHz	3x	Pins 5 & 6, 17 & 18 closed
--------	-------	----	----------------------------

<b>CPU SPEED SELECTION (INTEL MMX)</b>			
<b>CPU speed</b>	<b>Clock speed</b>	<b>Multiplier</b>	<b>JP3</b>
166MHz	66MHz	2.5x	Pins 3 & 4, 17 & 18 closed
200MHz	66MHz	3x	Pins 5 & 6, 17 & 18 closed

<b>CPU VOLTAGE SELECTION</b>	
<b>Voltage</b>	<b>JP2</b>
2.1v	Pins 1 & 7 closed
2.2v	Pins 2 & 8 closed
2.4v	Pins 3 & 9 closed
2.8v	Pins 4 & 10 closed
2.9v	Pins 5 & 11 closed
3.2v	Pins 6 & 12 closed