


# AMPTRON INTERNATIONAL, INC.

## PII-3748

<b>Device Type</b>	Mainboard
<b>Processor</b>	Pentium II/Celeron/Pentium III
<b>Processor Speed</b>	233/266/300/333/366/350/400/433/450/500MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	Unidentified
<b>Maximum Onboard Memory</b>	768MB (SDRAM supported) (Unified Memory Architecture UMA)
<b>Audio Chip Set</b>	Unidentified
<b>Cache</b>	0/128/256/512KB (located on the CPU)
<b>BIOS</b>	AMI
<b>Dimensions</b>	220mm x 220mm
<b>I/O Options</b>	32-bit PCI slots (3), floppy drive interface, sound/game interface, IDE interfaces (2), parallel port, PS/2 mouse interface, serial ports (2), IR connector, ATX power connector, audio in - CD-ROMs (2), wake on LAN connector

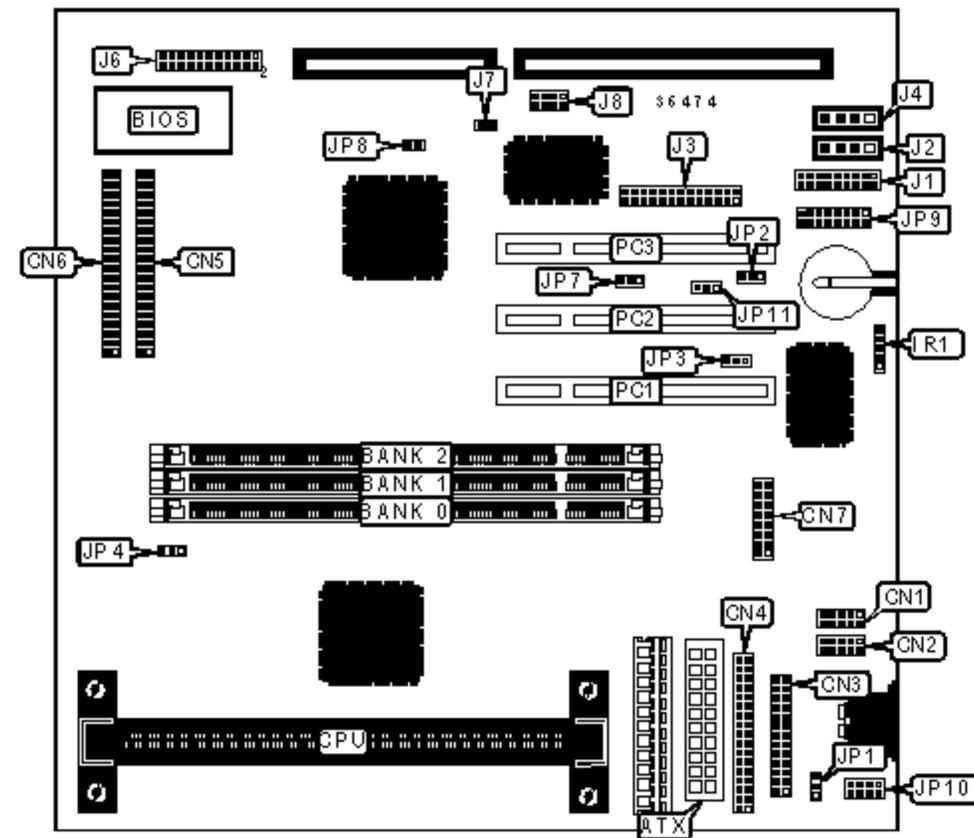

### CONNECTIONS

Purpose	Location	Purpose	Location
ATX power connector	ATX	Speaker	J6/pins 1/3/5/7
Serial port 1	CN1	Power LED & keylock	J6/pins 2/4/6/8/10
Serial port 2	CN2	Turbo LED	J6/pins 13 & 14
Parallel port	CN3	IDE interface LED	J6/pins 15 & 16
Floppy drive interface	CN4	Reset switch	J6/pins 17 & 18

IDE interface 1	CN5	Soft off power supply	J6/pins 21 & 22
IDE interface 2	CN6	Digital audio out	J7
VGA interface	CN7	Digital audio connector	J8
IR connector	IR1	Wake on LAN connector	JP3
ATX form card connector	J1	CPU fan power	JP4
Audio in - CD-ROM	J2	Modem DAA connector	JP9
Sound/game connector	J3	PS/2 mouse interface	JP10
Audio in - CD-ROM	J4	32-bit PCI slots	PC1 - PC3

### USER CONFIGURABLE SETTINGS

Function		Label	Position
»	Keyboard power on disabled	JP1	Pins 1 & 2 closed
	Keyboard power on enabled	JP1	Pins 2 & 3 closed
»	CMOS memory normal operation	JP2	Pins 1 & 2 closed
	CMOS memory clear	JP2	Pins 2 & 3 closed
»	On board sound enabled	JP7	Pins 1 & 2 closed
	On board sound disabled	JP7	Pins 2 & 3 closed
»	SPDIF out signal select 0.5v	JP8	Open
	SPDIF out signal select 5v	JP8	Closed
»	Modem module disabled	JP11	Pins 2 & 3 closed
	Modem module enabled	JP11	Pins 1 & 2 closed

### DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None
16MB	(1) 2M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None

24MB	(1) 2M x 64	(1) 1M x 64	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None	None
32MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 2M x 64	(1) 2M x 64	None
40MB	(1) 4M x 64	(1) 1M x 64	None
40MB	(1) 2M x 64	(1) 2M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 2M x 64	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
56MB	(1) 4M x 64	(1) 2M x 64	(1) 1M x 64
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 4M x 64	(1) 4M x 64	None
72MB	(1) 8M x 64	(1) 1M x 64	None

### DIMM CONFIGURATION (CON'T)

Size	Bank 0	Bank 1	Bank 2
72MB	(1) 4M x 64	(1) 4M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64	None
80MB	(1) 4M x 64	(1) 4M x 64	(1) 2M x 64
88MB	(1) 8M x 64	(1) 2M x 64	(1) 1M x 64
96MB	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
96MB	(1) 8M x 64	(1) 4M x 64	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
104MB	(1) 8M x 64	(1) 4M x 64	(1) 1M x 64
112MB	(1) 8M x 64	(1) 4M x 64	(1) 2M x 64

128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None
136MB	(1) 16M x 64	(1) 1M x 64	None
136MB	(1) 8M x 64	(1) 8M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 2M x 64	None
144MB	(1) 8M x 64	(1) 8M x 64	(1) 2M x 64
152MB	(1) 16M x 64	(1) 2M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
160MB	(1) 16M x 64	(1) 4M x 64	None
160MB	(1) 8M x 64	(1) 8M x 64	(1) 4M x 64
168MB	(1) 16M x 64	(1) 4M x 64	(1) 1M x 64
176MB	(1) 16M x 64	(1) 4M x 64	(1) 2M x 64
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
200MB	(1) 16M x 64	(1) 8M x 64	(1) 1M x 64
208MB	(1) 16M x 64	(1) 8M x 64	(1) 2M x 64
224MB	(1) 16M x 64	(1) 8M x 64	(1) 4M x 64
256MB	(1) 32M x 64	None	None
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
264MB	(1) 32M x 64	(1) 1M x 64	None
272MB	(1) 32M x 64	(1) 1M x 64	(1) 1M x 64
272MB	(1) 32M x 64	(1) 2M x 64	None
288MB	(1) 32M x 64	(1) 2M x 64	(1) 2M x 64
288MB	(1) 32M x 64	(1) 4M x 64	None
320MB	(1) 32M x 64	(1) 4M x 64	(1) 4M x 64
320MB	(1) 32M x 64	(1) 8M x 64	None

384MB	(1) 32M x 64	(1) 8M x 64	(1) 8M x 64
384MB	(1) 32M x 64	(1) 16M x 64	None
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
512MB	(1) 32M x 64	(1) 16M x 64	(1) 16M x 64
512MB	(1) 32M x 64	(1) 32M x 64	None
768MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64

Note: Board accepts SDRAM memory.

**CACHE CONFIGURATION**

Note: 256KB/512KB cache is located on the Pentium II CPU. 128KB cache is located on the Celeron 300A & 333 CPU. 512KB cache is located on the Pentium III CPU.