


J-MARK COMPUTER CORPORATION

J-7BXAS/L

Device Type	Mainboard
Processor	Pentium II
Processor Speed	233/266/300/333/350/400/450MHz
Chip Set	Intel 440BX
Maximum Onboard Memory	768MB (EDO & SDRAM supported)
Cache	256/512KB (located on Pentium II CPU)
BIOS	Unidentified
Dimensions	305mm x 190mm
I/O Options	32-bit PCI slots (4), floppy drive interface, game/MIDI port, green PC connector, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), IR connector, USB connectors (2), ATX power connector, AGP slot, line in, line out, microphone in, audio in – CD-ROMs (2), CPU thermal sensor connector

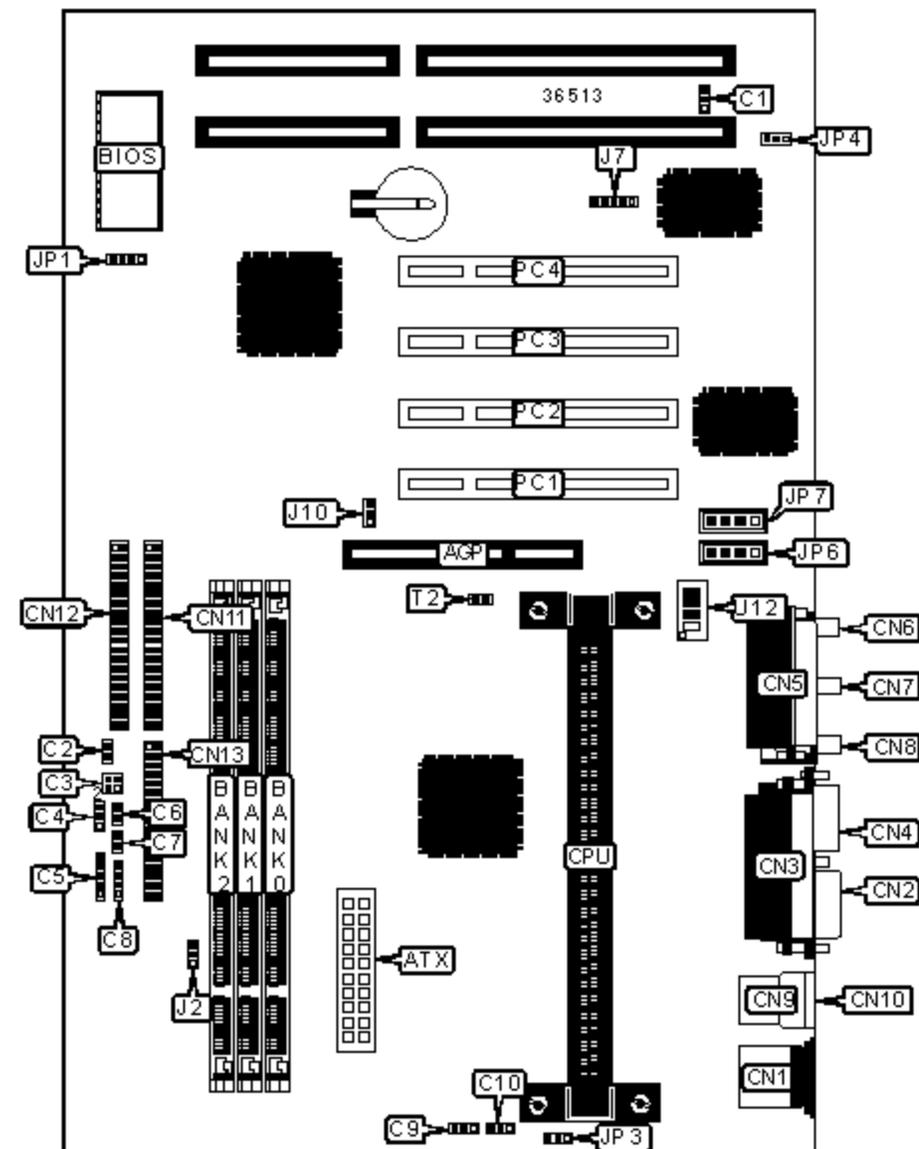

CONNECTIONS

Purpose	Location	Purpose	Location

AGP slot	AGP	Serial port 1	CN4
ATX power connector	ATX	Game/MIDI port	CN5
Chassis fan power	C1	Microphone in	CN6
Soft off power supply	C2	Line in	CN7
IDE interface LED	C3/pins 1 & 3	Line out	CN8
Green PC connector	C3/pins 2 & 4	USB connector 1	CN9
Turbo switch	C4	USB connector 2	CN10
Power LED & keylock	C5	IDE interface 2	CN11
Turbo LED	C6	IDE interface 1	CN12
Reset switch	C7	Floppy drive interface	CN13
Speaker	C8	IR connector	J7
Chassis fan power	C9	Audio in – CD-ROM	JP6
CPU fan power	C10	Audio in – CD-ROM	JP7
PS/2 mouse port	CN1	32-bit PCI slots	PC1 – PC4
Serial port 2	CN2	CPU thermal sensor connector	T2
Parallel port	CN3		

USER CONFIGURABLE SETTINGS

Function		Label	Position
»	Factory configured - do not alter	J2	Unidentified
»	Factory configured - do not alter	JP3	Unidentified
»	Factory configured - do not alter	JP4	Unidentified

DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None
16MB	(1) 2M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
24MB	(1) 2M x 64	(1) 1M x 64	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None	None

32MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 2M x 64	(1) 2M x 64	None
40MB	(1) 4M x 64	(1) 1M x 64	None
40MB	(1) 2M x 64	(1) 2M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 2M x 64	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
56MB	(1) 4M x 64	(1) 2M x 64	(1) 1M x 64
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 4M x 64	(1) 4M x 64	None
72MB	(1) 8M x 64	(1) 1M x 64	None
72MB	(1) 4M x 64	(1) 4M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64	None
80MB	(1) 4M x 64	(1) 4M x 64	(1) 2M x 64

DIMM CONFIGURATION (CON'T)

Size	Bank 0	Bank 1	Bank 2
88MB	(1) 8M x 64	(1) 2M x 64	(1) 1M x 64
96MB	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
96MB	(1) 8M x 64	(1) 4M x 64	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
104MB	(1) 8M x 64	(1) 4M x 64	(1) 1M x 64
112MB	(1) 8M x 64	(1) 4M x 64	(1) 2M x 64
128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None
136MB	(1) 16M x 64	(1) 1M x 64	None
136MB	(1) 8M x 64	(1) 8M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64

	(1) 16M x 64	(1) 2M x 64	None
144MB	(1) 16M x 64	(1) 2M x 64	None
144MB	(1) 8M x 64	(1) 8M x 64	(1) 2M x 64
152MB	(1) 16M x 64	(1) 2M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
160MB	(1) 16M x 64	(1) 4M x 64	None
160MB	(1) 8M x 64	(1) 8M x 64	(1) 4M x 64
168MB	(1) 16M x 64	(1) 4M x 64	(1) 1M x 64
176MB	(1) 16M x 64	(1) 4M x 64	(1) 2M x 64
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
200MB	(1) 16M x 64	(1) 8M x 64	(1) 1M x 64
208MB	(1) 16M x 64	(1) 8M x 64	(1) 2M x 64
224MB	(1) 16M x 64	(1) 8M x 64	(1) 4M x 64
256MB	(1) 32M x 64	None	None
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
264MB	(1) 32M x 64	(1) 1M x 64	None
272MB	(1) 32M x 64	(1) 1M x 64	(1) 1M x 64
272MB	(1) 32M x 64	(1) 2M x 64	None
288MB	(1) 32M x 64	(1) 2M x 64	(1) 2M x 64
288MB	(1) 32M x 64	(1) 4M x 64	None
320MB	(1) 32M x 64	(1) 4M x 64	(1) 4M x 64
320MB	(1) 32M x 64	(1) 8M x 64	None
384MB	(1) 32M x 64	(1) 8M x 64	(1) 8M x 64
384MB	(1) 32M x 64	(1) 16M x 64	None
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
512MB	(1) 32M x 64	(1) 16M x 64	(1) 16M x 64
512MB	(1) 32M x 64	(1) 32M x 64	None
768MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64

Note: Board accepts EDO & SDRAM memory.

CACHE CONFIGURATION

Note: 256KB/512KB cache is located on the Pentium II CPU.

CPU SPEED SELECTION

CPU speed	Clock speed	Multiplier	J10	U12/1	U12/2	U12/3	U12/4
233MHz	66MHz	3.5x	2 & 3	Off	Off	On	On
266MHz	66MHz	4x	2 & 3	On	On	Off	On
300MHz	66MHz	4.5x	2 & 3	Off	On	Off	On
333MHz	66MHz	5x	2 & 3	On	Off	Off	On
350MHz	100MHz	3.5x	1 & 2	Off	Off	On	On
400MHz	100MHz	4x	1 & 2	On	On	Off	On
450MHz	100MHz	4.5x	1 & 2	Off	On	Off	On

Note: Pins designated should be in the closed position.

CMOS/BATTERY SELECTION

Setting	JP1
»CMOS memory normal operation	Pins 2 & 3 closed
CMOS memory clear	Pins 3 & 4 closed
External battery installed	Closed