


J-MARK COMPUTER CORPORATION

J-7XAN

| | |
|-------------------------------|---|
| Device Type | Mainboard |
| Processor | Pentium II |
| Processor Speed | 233/266/300/333MHz |
| Chip Set | Intel 440LX |
| Maximum Onboard Memory | 768MB (EDO & SDRAM supported) |
| Maximum Video Memory | 1MB |
| Cache | 256/512KB (located on Pentium II CPU) |
| BIOS | Unidentified |
| Dimensions | 305mm x 170mm |
| I/O Options | 32-bit PCI slots (3), floppy drive interface, green PC connector, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), IR connector, USB connectors (2), ATX power connector, AGP slot, SB-link connector, wake on LAN connector |

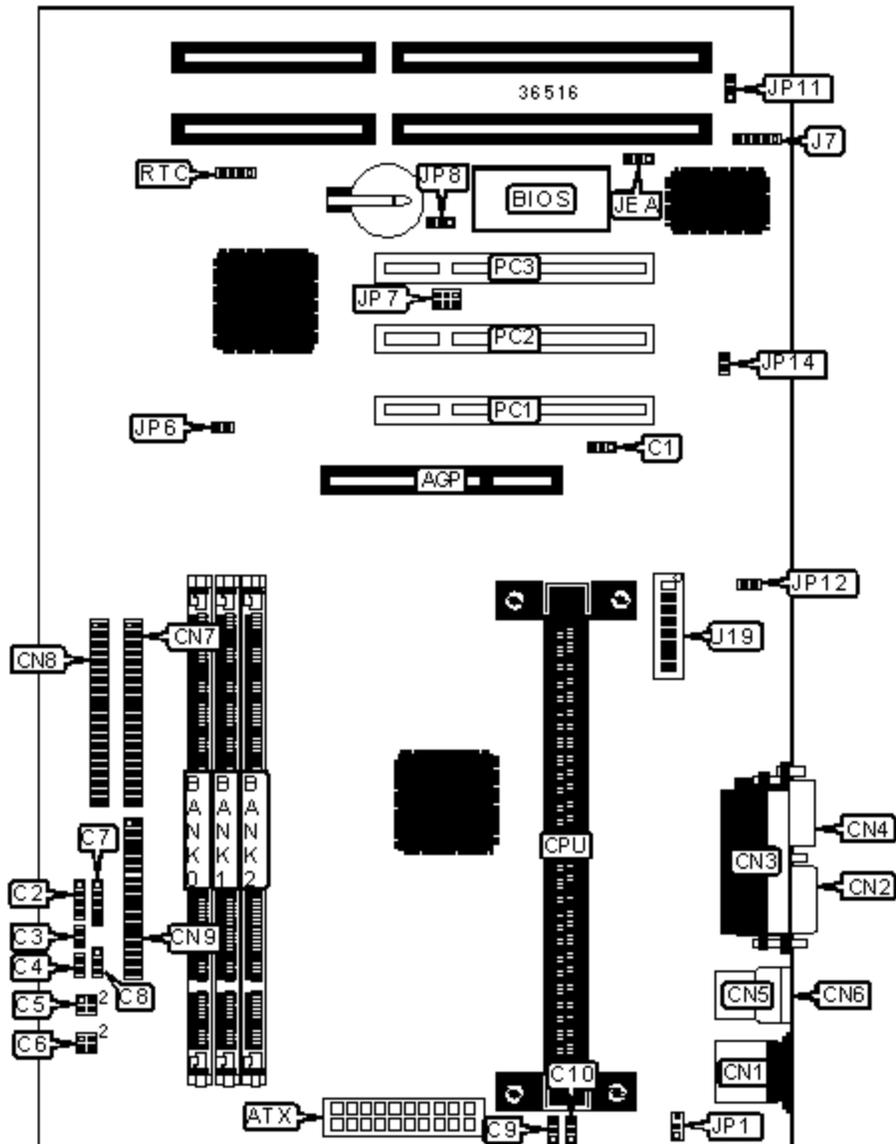

CONNECTIONS

| Purpose | Location | Purpose | Location |
|---------|----------|---------|----------|
| | | | |

| | | | |
|-----------------------|---------------|------------------------|-----------|
| AGP slot | AGP | PS/2 mouse port | CN1 |
| ATX power connector | ATX | Serial port 2 | CN2 |
| Chassis fan power | C1 | Parallel port | CN3 |
| Speaker | C2 | Serial port 1 | CN4 |
| Reset switch | C3 | USB connector 1 | CN5 |
| Turbo LED | C4 | USB connector 2 | CN6 |
| IDE interface LED | C5/pins 1 & 3 | IDE interface 2 | CN7 |
| Green PC connector | C5/pins 2 & 4 | IDE interface 1 | CN8 |
| Soft off power supply | C6/pins 2 & 4 | Floppy drive interface | CN9 |
| Power LED & keylock | C7 | IR connector | J7 |
| Turbo switch | C8 | SB-link connector | JP7 |
| Chassis fan power | C9 | Wake on LAN connector | JP8 |
| CPU fan power | C10 | 32-bit PCI slots | PC1 – PC3 |

USER CONFIGURABLE SETTINGS

| Function | | Label | Position |
|----------|-----------------------------------|-------|-------------------|
| » | Factory configured - do not alter | JEA | Unidentified |
| » | Factory configured - do not alter | JP1 | Unidentified |
| » | Factory configured - do not alter | JP6 | Unidentified |
| » | Factory configured - do not alter | JP11 | Unidentified |
| » | Factory configured - do not alter | JP12 | Unidentified |
| » | Factory configured - do not alter | JP14 | Unidentified |
| » | CMOS memory normal operation | RTC | Pins 2 & 3 closed |
| | CMOS memory clear | RTC | Pins 3 & 4 closed |
| » | Factory configured - do not alter | U19/8 | Off |

DIMM CONFIGURATION

| Size | Bank 0 | Bank 1 | Bank 2 |
|------|-------------|-------------|--------|
| 8MB | (1) 1M x 64 | None | None |
| 16MB | (1) 2M x 64 | None | None |
| 32MB | (1) 4M x 64 | (1) 4M x 64 | None |

| | | | |
|------|-------------|-------------|-------------|
| 16MB | (1) 1M x 64 | (1) 1M x 64 | None |
| 24MB | (1) 2M x 64 | (1) 1M x 64 | None |
| 24MB | (1) 1M x 64 | (1) 1M x 64 | (1) 1M x 64 |
| 32MB | (1) 4M x 64 | None | None |
| 32MB | (1) 2M x 64 | (1) 1M x 64 | (1) 1M x 64 |
| 32MB | (1) 2M x 64 | (1) 2M x 64 | None |
| 40MB | (1) 4M x 64 | (1) 1M x 64 | None |
| 40MB | (1) 2M x 64 | (1) 2M x 64 | (1) 1M x 64 |
| 48MB | (1) 4M x 64 | (1) 1M x 64 | (1) 1M x 64 |
| 48MB | (1) 4M x 64 | (1) 2M x 64 | None |
| 48MB | (1) 2M x 64 | (1) 2M x 64 | (1) 2M x 64 |
| 56MB | (1) 4M x 64 | (1) 2M x 64 | (1) 1M x 64 |
| 64MB | (1) 8M x 64 | None | None |
| 64MB | (1) 4M x 64 | (1) 2M x 64 | (1) 2M x 64 |
| 64MB | (1) 4M x 64 | (1) 4M x 64 | None |
| 72MB | (1) 8M x 64 | (1) 1M x 64 | None |
| 72MB | (1) 4M x 64 | (1) 4M x 64 | (1) 1M x 64 |

DIMM CONFIGURATION (CON'T)

| Size | Bank 0 | Bank 1 | Bank 2 |
|-------|--------------|-------------|-------------|
| 80MB | (1) 8M x 64 | (1) 1M x 64 | (1) 1M x 64 |
| 80MB | (1) 8M x 64 | (1) 2M x 64 | None |
| 80MB | (1) 4M x 64 | (1) 4M x 64 | (1) 2M x 64 |
| 88MB | (1) 8M x 64 | (1) 2M x 64 | (1) 1M x 64 |
| 96MB | (1) 8M x 64 | (1) 2M x 64 | (1) 2M x 64 |
| 96MB | (1) 8M x 64 | (1) 4M x 64 | None |
| 96MB | (1) 4M x 64 | (1) 4M x 64 | (1) 4M x 64 |
| 104MB | (1) 8M x 64 | (1) 4M x 64 | (1) 1M x 64 |
| 112MB | (1) 8M x 64 | (1) 4M x 64 | (1) 2M x 64 |
| 128MB | (1) 16M x 64 | None | None |
| 128MB | (1) 8M x 64 | (1) 4M x 64 | (1) 4M x 64 |

| | | | |
|-------|--------------|--------------|--------------|
| 128MB | (1) 8M x 64 | (1) 8M x 64 | None |
| 136MB | (1) 16M x 64 | (1) 1M x 64 | None |
| 136MB | (1) 8M x 64 | (1) 8M x 64 | (1) 1M x 64 |
| 144MB | (1) 16M x 64 | (1) 1M x 64 | (1) 1M x 64 |
| 144MB | (1) 16M x 64 | (1) 2M x 64 | None |
| 144MB | (1) 8M x 64 | (1) 8M x 64 | (1) 2M x 64 |
| 160MB | (1) 16M x 64 | (1) 4M x 64 | None |
| 160MB | (1) 8M x 64 | (1) 8M x 64 | (1) 4M x 64 |
| 168MB | (1) 16M x 64 | (1) 4M x 64 | (1) 1M x 64 |
| 176MB | (1) 16M x 64 | (1) 4M x 64 | (1) 2M x 64 |
| 192MB | (1) 16M x 64 | (1) 4M x 64 | (1) 4M x 64 |
| 192MB | (1) 16M x 64 | (1) 8M x 64 | None |
| 192MB | (1) 8M x 64 | (1) 8M x 64 | (1) 8M x 64 |
| 200MB | (1) 16M x 64 | (1) 8M x 64 | (1) 1M x 64 |
| 208MB | (1) 16M x 64 | (1) 8M x 64 | (1) 2M x 64 |
| 224MB | (1) 16M x 64 | (1) 8M x 64 | (1) 4M x 64 |
| 256MB | (1) 32M x 64 | None | None |
| 256MB | (1) 16M x 64 | (1) 8M x 64 | (1) 8M x 64 |
| 264MB | (1) 32M x 64 | (1) 1M x 64 | None |
| 272MB | (1) 32M x 64 | (1) 1M x 64 | (1) 1M x 64 |
| 272MB | (1) 32M x 64 | (1) 2M x 64 | None |
| 288MB | (1) 32M x 64 | (1) 2M x 64 | (1) 2M x 64 |
| 288MB | (1) 32M x 64 | (1) 4M x 64 | None |
| 320MB | (1) 32M x 64 | (1) 4M x 64 | (1) 4M x 64 |
| 320MB | (1) 32M x 64 | (1) 8M x 64 | None |
| 384MB | (1) 32M x 64 | (1) 8M x 64 | (1) 8M x 64 |
| 384MB | (1) 32M x 64 | (1) 16M x 64 | None |
| 384MB | (1) 16M x 64 | (1) 16M x 64 | (1) 16M x 64 |
| 512MB | (1) 32M x 64 | (1) 16M x 64 | (1) 16M x 64 |
| 512MB | (1) 32M x 64 | (1) 32M x 64 | None |
| 768MB | (1) 32M x 64 | (1) 32M x 64 | (1) 32M x 64 |

Note: Board accepts EDO & SDRAM memory.

CACHE CONFIGURATION

Note: 256KB/512KB cache is located on the Pentium II CPU.

CPU SPEED SELECTION

| CPU speed | Clock speed | Multiplier | U19/1 | U19/2 | U19/3 | U19/4 |
|-----------|-------------|------------|-------|-------|-------|-------|
| 233MHz | 66MHz | 3.5x | On | On | Off | Off |
| 266MHz | 66MHz | 4x | On | Off | On | On |
| 300MHz | 66MHz | 4.5x | On | Off | Off | On |
| 333MHz | 66MHz | 5x | On | Off | On | Off |

CPU SPEED SELECTION (CON'T)

| CPU speed | Clock speed | Multiplier | U19/5 | U19/6 | U19/7 |
|-----------|-------------|------------|-------|-------|-------|
| 233MHz | 66MHz | 3.5x | Off | Off | Off |
| 266MHz | 66MHz | 4x | Off | Off | Off |
| 300MHz | 66MHz | 4.5x | Off | Off | Off |
| 333MHz | 66MHz | 5x | Off | Off | Off |