


COMPAQ COMPUTER CORPORATION

PROLIANT 4000R

Device Type	Mainboard
Processor	Pentium
Processor Speed	66/90/100/133/166MHz
Chip Set	Unidentified
Video Chip Set	Unidentified
Maximum Onboard Memory	512MB
Maximum Video Memory	Unidentified
Cache	Unidentified
BIOS	Unidentified
Dimensions	311mm x 482mm
I/O Options	32-bit external memory card, 32-bit EISA local bus slots (8), floppy drive interface, SCSI-2 interface, riser slot

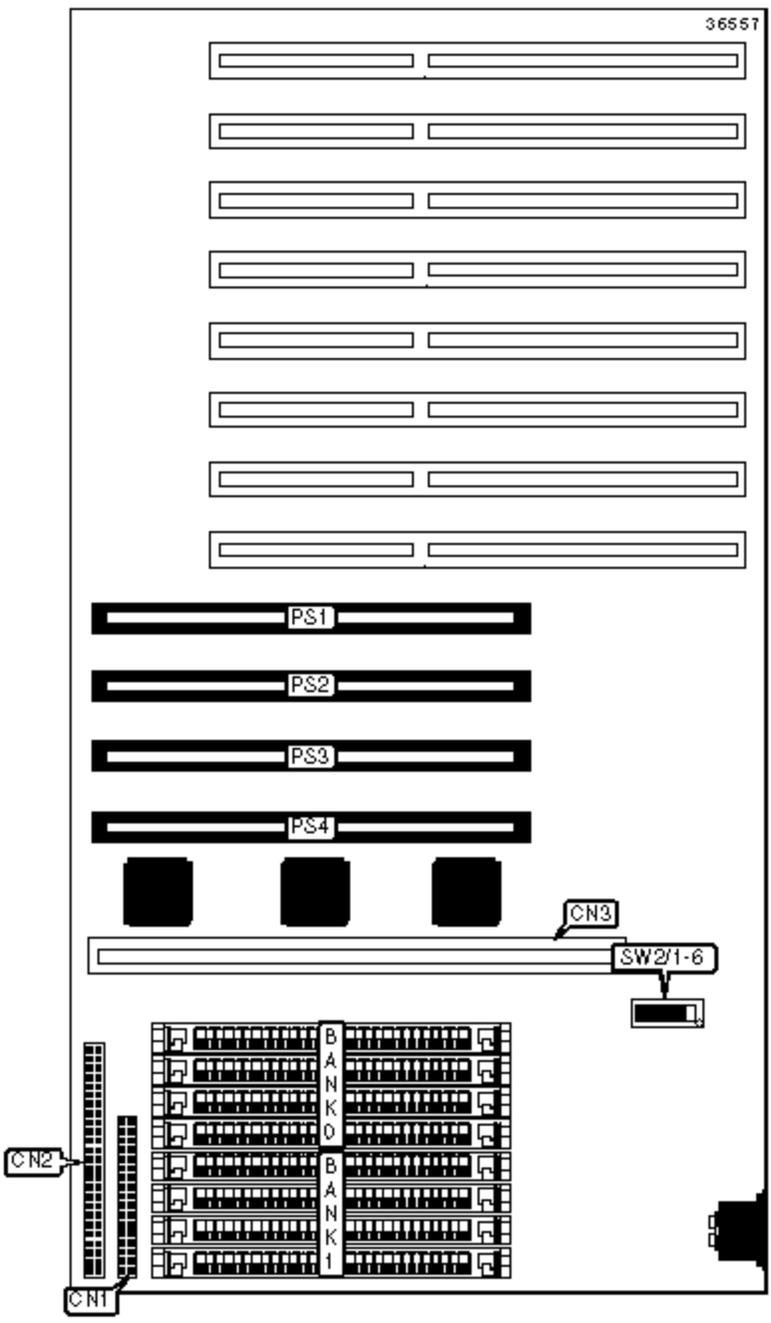

CONNECTIONS

Purpose	Location	Purpose	Location
Floppy drive interface	CN1	Memory board slot	CN3
SCSI interface	CN2	Processor slots	PS1 - PS4

USER CONFIGURABLE SETTINGS			
Function		Label	Position
»	Video enabled	SW1/1	Off
	Video disabled	SW1/1	On
»	One or two processors installed in processor slots	SW1/2	Off
	Three or four processors are installed in processor slots	SW1/2	On
»	Factory configured - do not alter	SW1/3	Off
»	Boot from diskette disabled	SW1/4	Off
	Boot from diskette enabled	SW1/4	On
»	Password at power-on disabled	SW1/5	Off
	Password at power-on enabled	SW1/5	On
»	Validate NVRAM	SW1/6	Off
	Invalidate and clear NVRAM	SW1/6	On

SIMM CONFIGURATION		
Size	Bank 0	Bank 1
16MB	(4) 2MB X 36	None
32MB	(4) 4MB X 36	None
64MB	(4) 4MB x 36	(4) 4MB x 36
128MB	(4) 16MB x 36	None
512MB	(4) 16MB x 36	(4) 16MB x 36