


DELL COMPUTER CORPORATION

POWEREDGE 6300

Device Type	Mainboard
Processor	Pentium II (4)
Processor Speed	350/400/450/500MHz
Chip Set	Intel 450NX
Video Chip Set	ATI
Maximum Onboard Memory	4GB (EDO supported)
Maximum Video Memory	2MB
Cache	256/512KB (located on the Pentium II CPU)
BIOS	Unidentified
Dimensions	Unidentified
I/O Options	32-bit system memory card, 32-bit PCI slots (3), 64-bit PCI slots (4), floppy drive interface, SCSI interfaces (3), parallel port, PS/2 mouse port, serial ports (2), VGA port, ATX power connector

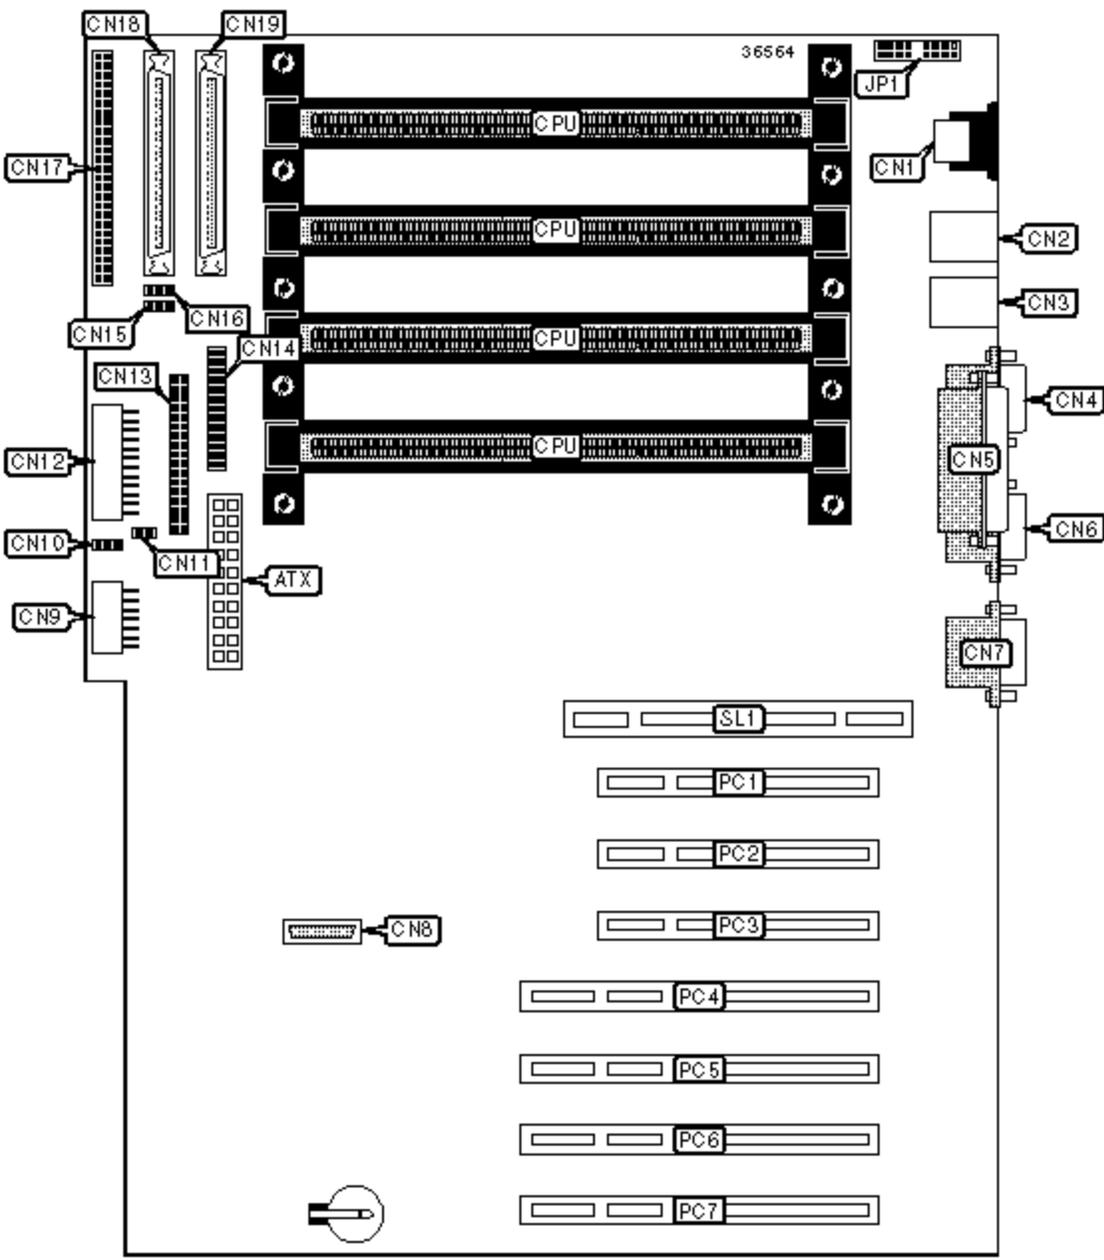

CONNECTIONS

	Location		Location

Purpose		Purpose	
ATX power connector	ATX	Power input connector	CN12
PS/2 mouse port	CN1	Floppy drive interface	CN13
Server management bus in connector	CN2	SCSI backplane board connector	CN14
Server management bus out connector	CN3	CPU fan power connector	CN15
Serial port 1	CN4	CPU fan power connector	CN16
Parallel port	CN5	SCSI interface	CN17
Serial port 2	CN6	SCSI port B	CN18
VGA port	CN7	SCSI port A	CN19
Remote assistant card connector	CN8	32-bit PCI slots	PC1 - PC3
Power input connector	CN9	64-bit PCI slots	PC4 - PC7
CPU fan connector	CN10	System memory board slot	SL1
Chassis intrusion switch connector	CN11		

USER CONFIGURABLE SETTINGS

Function		Label	Position
»	Boot password enabled	JP1/Pins 1 & 2	Closed
	Boot password disabled	JP1/Pins 1 & 2	Open
»	Normal system boot enabled	JP1/Pins 3 & 4	Open
	System boot from BIOS expansion card	JP1/Pins 3 & 4	Closed
»	ISA configuration retained and normal operation	JP1/Pins 5 & 6	Open
	ISA configuration cleared	JP1/Pins 5 & 6	Closed
»	Factory configured - do not alter	JP1/Pins 7 & 8	Open

DIMM CONFIGURATION

Note: Diagram of memory board is not available.

CACHE CONFIGURATION

Note: 256KB/512KB cache is located on the Pentium II CPU.

CPU SPEED SELECTION

Speed	JP1/Pins 11 & 12	JP1/Pins 13 & 14	JP1/Pins 15 & 16	JP1/Pins 17 & 18
350MHz	Closed	Open	Open	Open
350MHz	Open	Closed	Open	Open
400MHz	Open	Open	Closed	Open
450MHz	Open	Open	Open	Closed