


# VEXTREC TECHNOLOGY INC.

## GMB-P6BIAK (VER. 1.02)

<b>Device Type</b>	Mainboard
<b>Processor</b>	Celeron/Pentium II
<b>Processor Speed</b>	233/300/333/350/366/400/450MHz
<b>Chip Set</b>	Intel 440BX
<b>Maximum Onboard Memory</b>	1GB (SDRAM supported)
<b>Cache</b>	0/128/256/512KB (located on the CPU)
<b>BIOS</b>	Award
<b>Dimensions</b>	305mm x 217mm
<b>I/O Options</b>	32-bit PCI slots (4), floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), IR connector, USB connectors (2), ATX power connector, AGP slot, SB-link connector, Wake-on-LAN connector

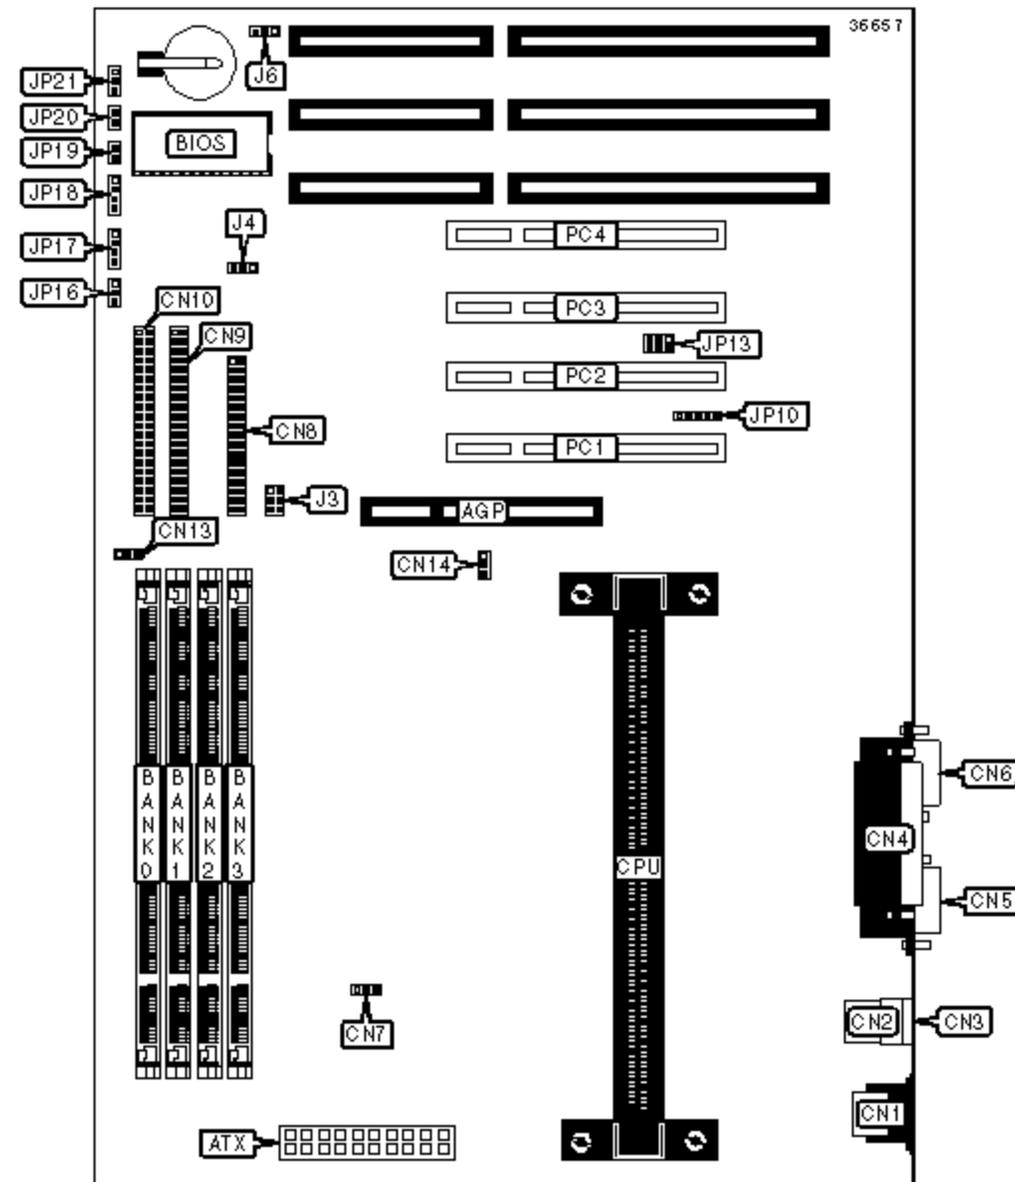

### CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	Chassis fan power	CN13

ATX power connector	ATX	System fan power	CN14
PS/2 mouse port	CN1	IR connector	JP10
USB connector 1	CN2	SB-link connector	JP13
USB connector 2	CN3	Wake-on-LAN connector	JP16
Parallel port	CN4	IDE interface LED	JP17
Serial port 1	CN5	PC speaker	JP18
Serial port 2	CN6	Power switch	JP19
CPU fan power	CN7	Reset switch	JP20
Floppy drive interface	CN8	Power LED	JP21
IDE interface 2	CN9	32-bit PCI slots	PC1 - PC4
IDE interface 1	CN10		

### USER CONFIGURABLE SETTINGS

Function		Label	Position
»	CMOS normal operation	J4	Pins 1 & 2 closed
	CMOS clear memory	J4	Pins 2 & 3 closed
»	Flash BIOS voltage select 5V	J6	Pins 1 & 2 closed
	Flash Bios voltage select 12V	J6	Pins 2 & 3 closed

### DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2	Bank 3
8MB	(1) 1M x 64	None	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None	None
16MB	(1) 2M x 64	None	None	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64	None
32MB	(1) 1M x 64			
32MB	(1) 2M x 64	(1) 2M x 64	None	None
32MB	(1) 4M x 64	None	None	None

48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64	None
64MB	(1) 2M x 64			
64MB	(1) 4M x 64	(1) 4M x 64	None	None
64MB	(1) 8M x 64	None	None	None
80MB	(1) 4M x 64	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64
128MB	(1) 4M x 64			
128MB	(1) 8M x 64	(1) 8M x 64	None	None
128MB	(1) 16M x 64	None	None	None
144MB	(1) 8M x 64	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
160MB	(1) 8M x 64	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
256MB	(1) 8M x 64			
256MB	(1) 16M x 64	(1) 16M x 64	None	None
256MB	(1) 32M x 64	None	None	None
272MB	(1) 16M x 64	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
288MB	(1) 16M x 64	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
320MB	(1) 16M x 64	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	None
384MB	(1) 16M x 64	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
512MB	(1) 16M x 64			
512MB	(1) 32M x 64	(1) 32M x 64	None	None
528MB	(1) 32M x 64	(1) 32M x 64	(1) 1M x 64	(1) 1M x 64
544MB	(1) 32M x 64	(1) 32M x 64	(1) 2M x 64	(1) 2M x 64
576MB	(1) 32M x 64	(1) 32M x 64	(1) 4M x 64	(1) 4M x 64
640MB	(1) 32M x 64	(1) 32M x 64	(1) 8M x 64	(1) 8M x 64

768MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64	None
768MB	(1) 32M x 64	(1) 32M x 64	(1) 16M x 64	(1) 16M x 64
1024MB	(1) 32M x 64			
Note: Board supports EDO & SDRAM memory.				

### CACHE CONFIGURATION

Note: 256KB/512KB cache is located on the Pentium II CPU. 128KB located on the Celeron 300A & 333 CPU.

### CPU SPEED SELECTION (CELERON)

CPU speed	Clock speed	Multiplier	J3/Pins 1 & 2	J3/Pins 3 & 4	J3/Pins 5 & 6
266MHz	66MHz	4x	Closed	Closed	Open
300MHz	66MHz	4.5x	Open	Closed	Open
333MHz	66MHz	5x	Closed	Open	Open
366MHz	66MHz	5.5x	Open	Open	Open
400MHz	100MHz	4x	Closed	Closed	Open
450MHz	100MHz	4.5x	Open	Closed	Open

### CPU SPEED SELECTION (PENTIUM II)

CPU speed	Clock speed	Multiplier	J3/Pins 1 & 2	J3/Pins 3 & 4	J3/Pins 5 & 6
233MHz	66MHz	3.5x	Open	Open	Closed
266MHz	66MHz	4x	Closed	Closed	Open
300MHz	66MHz	4.5x	Open	Closed	Open
333MHz	66MHz	5x	Closed	Open	Open
350MHz	100MHz	3.5x	Open	Open	Closed
400MHz	100MHz	4x	Closed	Closed	Open
450MHz	100MHz	4.5x	Open	Closed	Open

