


SIEMENS NIXDORF
SYSTEM BOARD D970

Configuration

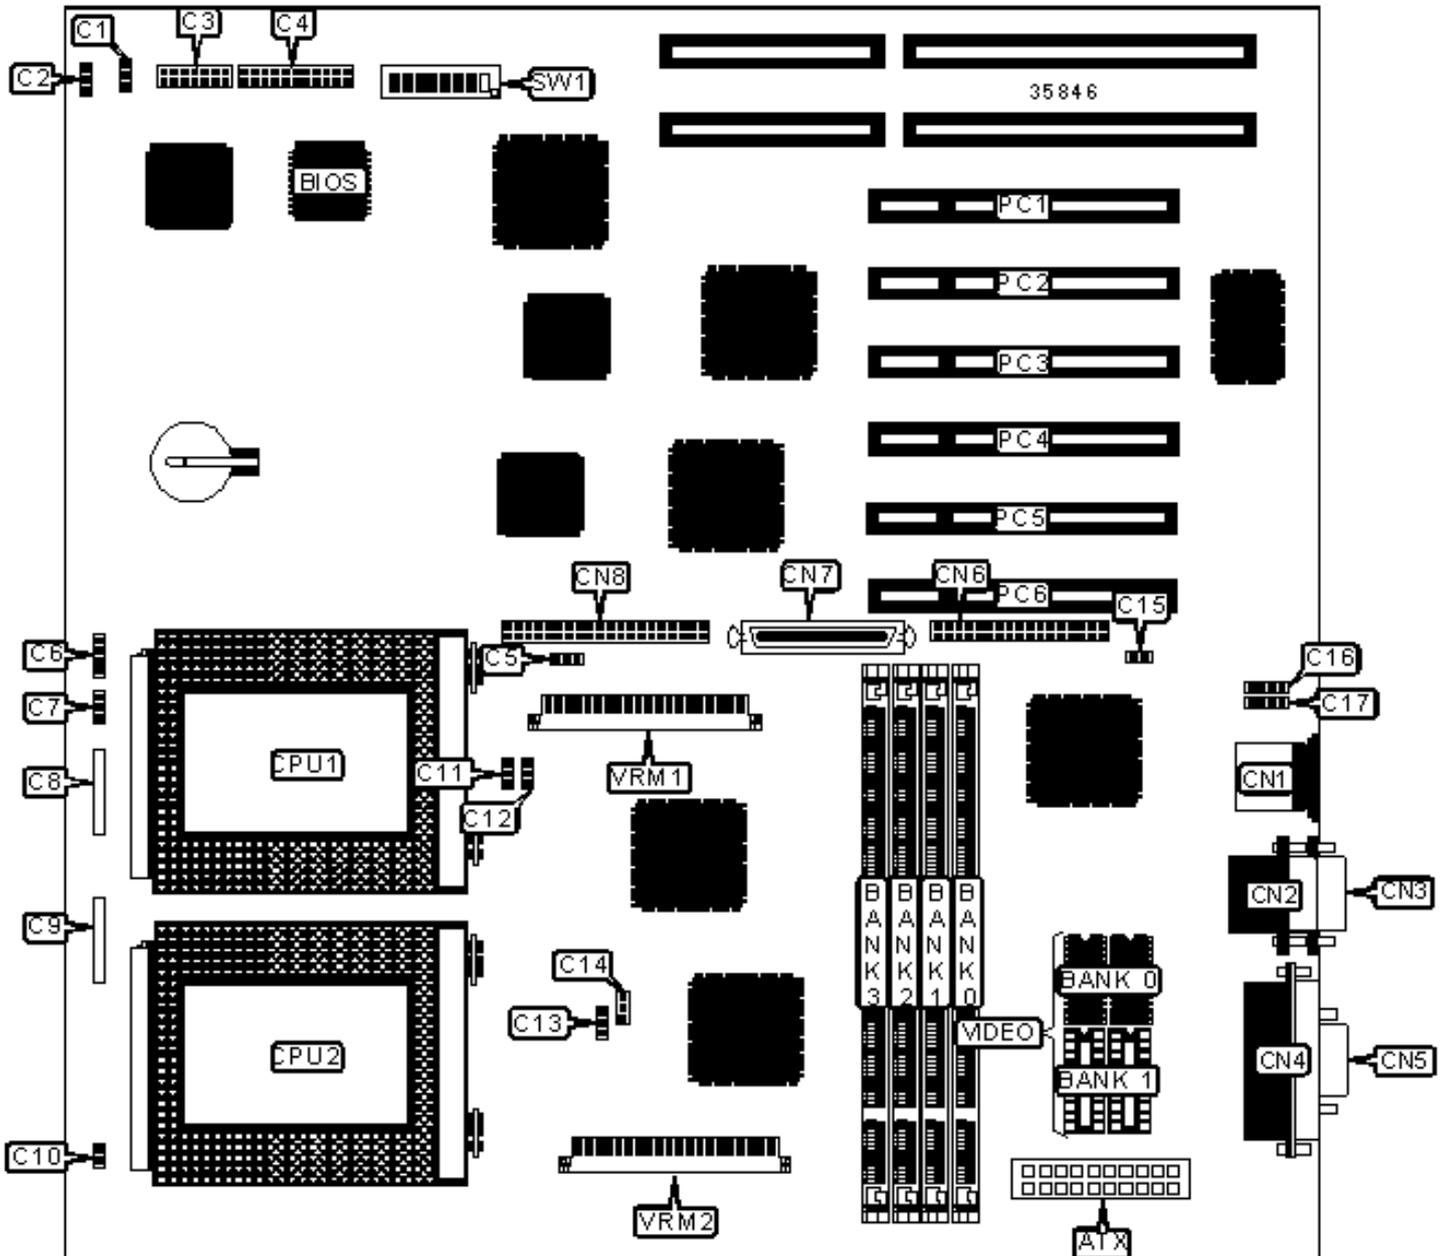

CONNECTIONS

Purpose	Location	Purpose	Location
ATX power connector	ATX	Modem on connector	C15
Chassis fan power	C1	CAN bus control 2	C16
Temperature sensor	C2	CAN bus control 1	C17
Aux voltage PRIMERGY 500/700	C3	PS/2 mouse port	CN1
Power supply PRIMERGY 500/700	C4	Serial port 2	CN2
SCSI interface LED	C5	Serial port 1	CN3
Chassis fan power	C6	Parallel port	CN4
Speaker	C7	VGA port	CN5
Front panel connector	C8	Floppy drive interface	CN6
Front panel connector	C9	Ultra Wide SCSI interface	CN7
Soft off power supply	C10	IDE interface	CN8
Temperature sensor	C11	32-bit PCI slots	PC1 – PC6
Chassis fan power	C12	VRM connector	VRM1
Temperature sensor	C13	VRM connector	VRM2
Chassis fan power	C14		

USER CONFIGURABLE SETTINGS

Function	Label	Position
» BIOS normal operation	SW1/1	Off
BIOS recovery mode	SW1/1	On
» Factory configured - do not alter	SW1/2	Off
» BIOS write protect disabled	SW1/3	Off
BIOS write protect enabled	SW1/3	On
» Floppy drive write protect disabled	SW1/4	Off

	Floppy drive write protect enabled	SW1/4	On
--	------------------------------------	-------	----

DIMM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
8MB	(1) 1M x 64	None	None	None
16MB	(1) 2M x 64	None	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None	None
24MB	(1) 2M x 64	(1) 1M x 64	None	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64	None
32MB	(1) 4M x 64	None	None	None

DIMM CONFIGURATION (CON'T)				
Size	Bank 0	Bank 1	Bank 2	Bank 3
32MB	(1) 2M x 64	(1) 2M x 64	None	None
32MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
40MB	(1) 4M x 64	(1) 1M x 64	None	None
48MB	(1) 4M x 64	(1) 2M x 64	None	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64	None
64MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 8M x 64	None	None	None
64MB	(1) 4M x 64	(1) 4M x 64	None	None
72MB	(1) 8M x 64	(1) 1M x 64	None	None
80MB	(1) 8M x 64	(1) 2M x 64	None	None
96MB	(1) 8M x 64	(1) 4M x 64	None	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	None
128MB	(1) 16M x 64	None	None	None

128MB	(1) 8M x 64	(1) 8M x 64	None	None
128MB	(1) 4M x 64			
136MB	(1) 16M x 64	(1) 1M x 64	None	None
144MB	(1) 16M x 64	(1) 2M x 64	None	None
176MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	None
256MB	(1) 32M x 64	None	None	None
256MB	(1) 16M x 64	(1) 16M x 64	None	None
256MB	(1) 8M x 64			
272MB	(1) 16M x 64	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
280MB	(1) 32M x 64	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
288MB	(1) 16M x 64	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
320MB	(1) 16M x 64	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	None
448MB	(1) 32M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
512MB	(1) 32M x 64	(1) 32M x 64	None	None
512MB	(1) 16M x 64			
640MB	(1) 32M x 64	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
768MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64	None
1024MB	(1) 32M x 64			

CACHE CONFIGURATION

Note: 256KB/512KB cache is located on the Pentium Pro CPU.

VIDEO MEMORY CONFIGURATION

Size	Bank 0	Bank 1
1MB	(2) 256K x 16	None
2MB	(2) 256K x 16	(2) 256K x 16

CPU SPEED SELECTION						
CPU speed	Clock speed	Multiplier	SW1/5	SW1/6	SW1/7	SW1/8
166MHz	66MHz	2.5x	Off	Off	On	On
200MHz	66MHz	3x	Off	On	Off	On