


EURONE

MS-7380SG

Device Type	Mainboard
Processor	Celeron/Pentium II/Pentium III
Processor Speed	233/266/300/333/350/400/433/450/500MHz
Chip Set	SIS 620
Video Chip Set	Unidentified
Audio Chip Set	Unidentified
Maximum Onboard Memory	768MB (SDRAM supported)
Maximum Video Memory	8MB (shared from system memory)
Maximum Audio Memory	Unidentified
Cache	0/128/256/512KB (located on the CPU)
BIOS	Award
Dimensions	244mm x 190mm
I/O Options	32-bit PCI slots (3), floppy drive interface, game port, IDE interfaces (2), parallel port, PS/2 mouse port, serial port, serial interface, VGA port, IR connector, USB ports (2), ATX power connector, line in, line out, microphone in, audio in - CD-ROMs (2), Wake-on-LAN connector

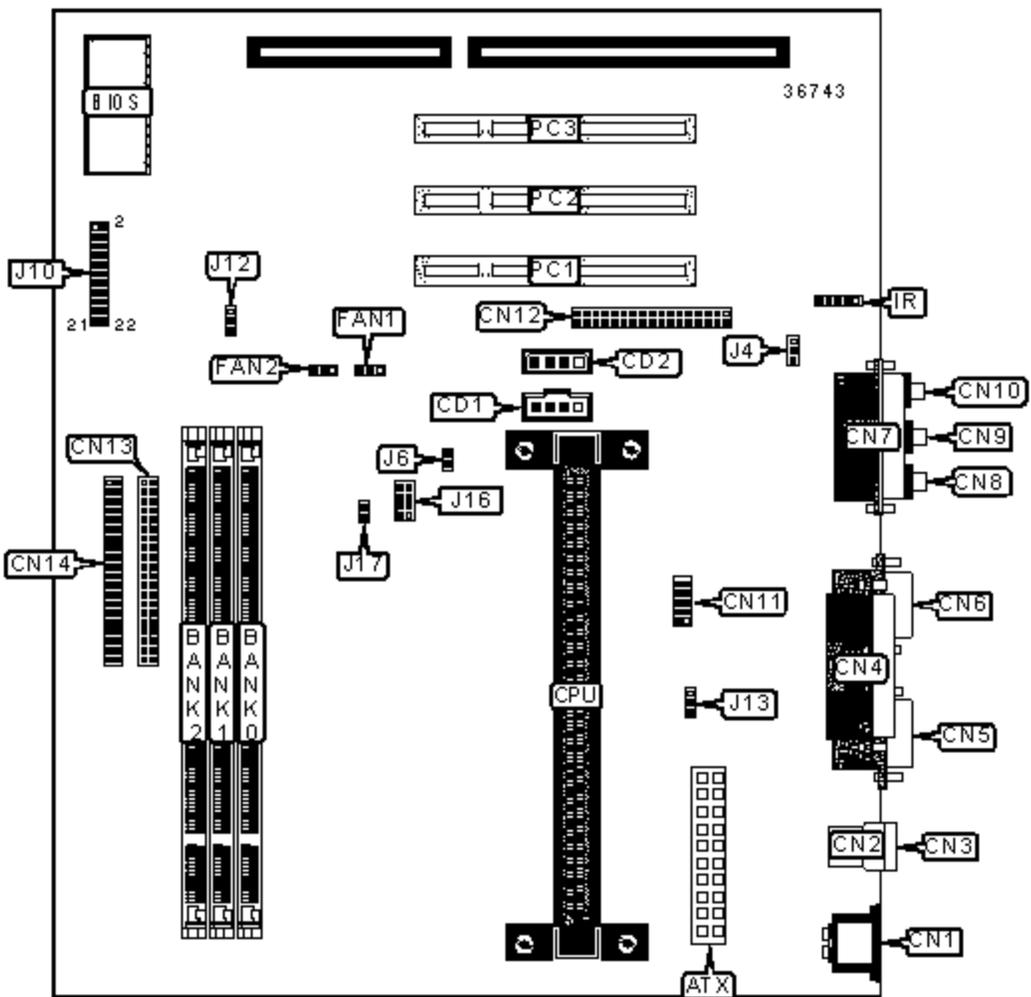

CONNECTIONS

Purpose	Location	Purpose	Location
ATX power connector	ATX	IDE interface 2	CN14
Audio in - CD-ROM (Sony)	CD1	CPU fan power	FAN2

Audio in - CD-ROM (Panasonic)	CD2	Chassis fan power	FAN1
PS/2 mouse port	CN1	IR connector	IR
USB port 1	CN2	Wake-on-LAN connector	J4
USB port 2	CN3	SPDIF out	J6
Parallel port	CN4	Speaker	J10/Pins 1, 3, 5, 7
Serial port	CN5	Power LED & keylock	J10/Pins 2, 4, 6, 8, 10
VGA port	CN6	IDE interface LED	J10/Pins 15 & 16
Game port	CN7	Reset switch	J10/Pins 17 & 18
Line out	CN8	ACPI LED	J10/Pins 19 & 20
Line in/rear	CN9	Power switch	J10/Pins 21 & 22
Microphone in	CN10	Digital audio connector	J16
Serial interface	CN11	SPDIF in	J17
Floppy drive interface	CN12	32-bit PCI slots	PC1 - PC3
IDE interface 1	CN13		

USER CONFIGURABLE SETTINGS

Function		Label	Position
»	CMOS memory normal operation	J12	Pins 1 & 2 closed
	CMOS memory clear	J12	Pins 2 & 3 closed
»	Keyboard power on disabled	J13	Pins 1 & 2 closed
	Keyboard power on enabled	J13	Pins 2 & 3 closed

DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2
4MB	(1) 512KB x 64	None	None
8MB	(1) 1M x 64	None	None
8MB	(1) 512KB x 64		None

		(1) 512KB x 64	
12MB	(1) 512KB x 64	(1) 512KB x 64	(1) 512KB x 64
16MB	(1) 2M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
20MB	(1) 1M x 64	(1) 1M x 64	(1) 512KB x 64
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None	None
32MB	(1) 2M x 64	(1) 2M x 64	None
36MB	(1) 2M x 64	(1) 2M x 64	(1) 512KB x 64
40MB	(1) 2M x 64	(1) 2M x 64	(1) 1M x 64
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 4M x 64	None
68MB	(1) 4M x 64	(1) 4M x 64	(1) 512KB x 64
72MB	(1) 4M x 64	(1) 4M x 64	(1) 1M x 64
80MB	(1) 4M x 64	(1) 4M x 64	(1) 2M x 64
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 8M x 64	None
132MB	(1) 8M x 64	(1) 8M x 64	(1) 512KB x 64
136MB	(1) 8M x 64	(1) 8M x 64	(1) 1M x 64
144MB	(1) 8M x 64	(1) 8M x 64	(1) 2M x 64
160MB	(1) 8M x 64	(1) 8M x 64	(1) 4M x 64
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
256MB	(1) 16M x 64	(1) 16M x 64	None
256MB	(1) 32M x 64	None	None
260MB	(1) 16M x 64	(1) 16M x 64	(1) 512KB x 64
264MB	(1) 16M x 64	(1) 16M x 64	(1) 1M x 64

272MB	(1) 16M x 64	(1) 16M x 64	(1) 2M x 64
288MB	(1) 16M x 64	(1) 16M x 64	(1) 4M x 64
320MB	(1) 16M x 64	(1) 16M x 64	(1) 8M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
512MB	(1) 32M x 64	(1) 32M x 64	None
516MB	(1) 32M x 64	(1) 32M x 64	(1) 512KB x 64
520MB	(1) 32M x 64	(1) 32M x 64	(1) 1M x 64
528MB	(1) 32M x 64	(1) 32M x 64	(1) 2M x 64
544MB	(1) 32M x 64	(1) 32M x 64	(1) 4M x 64
576MB	(1) 32M x 64	(1) 32M x 64	(1) 8M x 64
640MB	(1) 32M x 64	(1) 32M x 64	(1) 16M x 64
768MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64

Note: Board supports SDRAM memory.

CACHE CONFIGURATION

Note: 256KB/512KB cache is located on the Pentium II CPU. 128KB cache is located on the Celeron 300A and greater Celerons.