TMC RESEARCH CORPORATION

TI6NB (VER. 1.0A)

Configuration

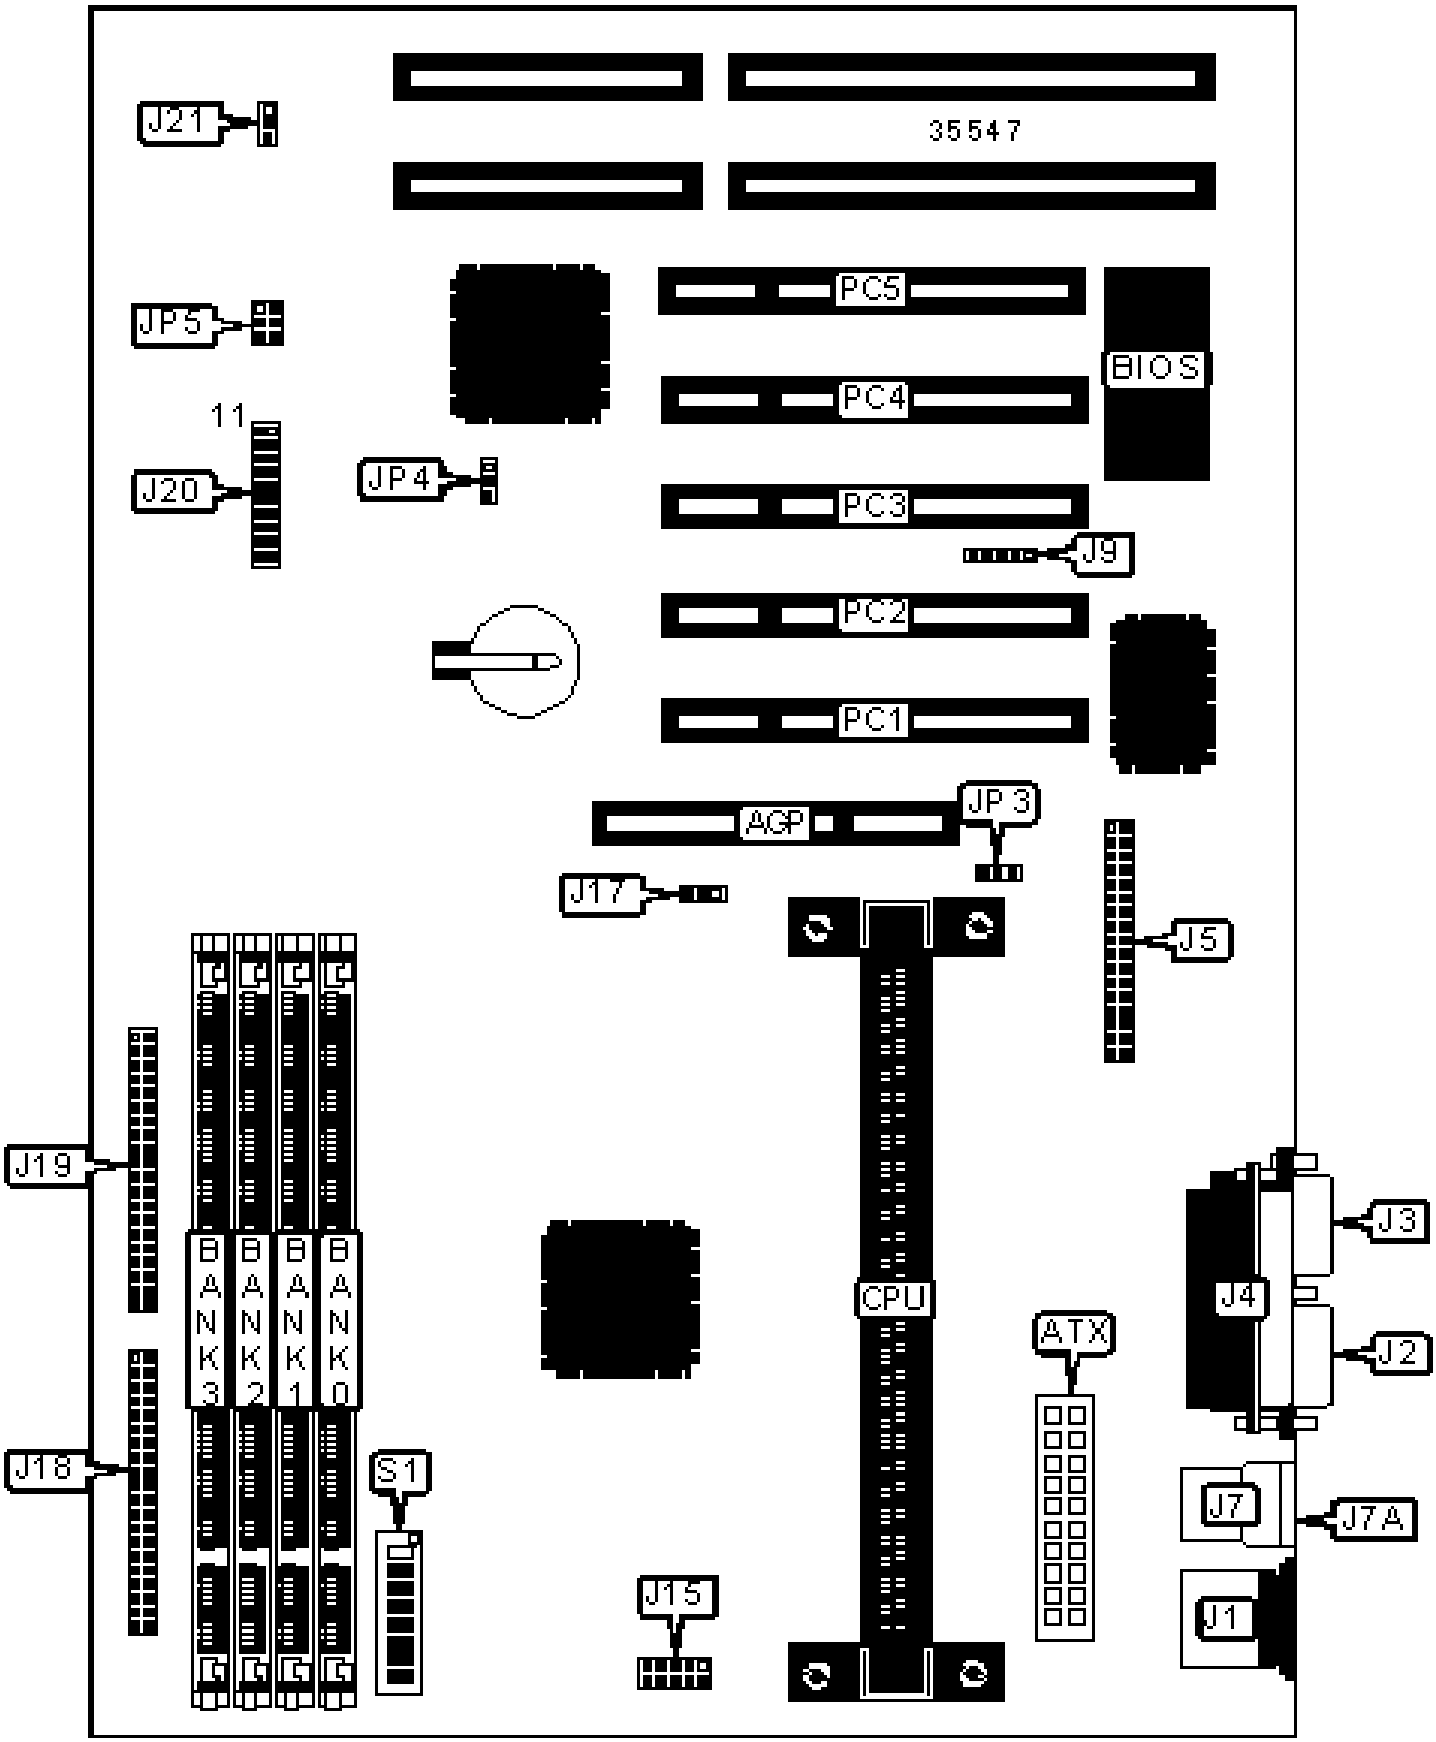

CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	IDE interface 1	J19
ATX power connector	ATX	Speaker	J16/pins 1 - 4
PS/2 mouse port	J1	Soft off power supply	J16/pins 7 & 17
Serial port 1	J2	Turbo LED	J16/pins 8 & 18
Serial port 2	J3	Reset switch	J16/pins 9 & 19
Parallel port	J4	IDE interface LED	J16/pins 10 & 20
Floppy drive interface	J5	Power LED & keylock	J16/pins 11 - 15
USB connector 1	J7	Chassis fan power	J21
USB connector 2	J7A	Wake on LAN connector	JP3
IR connector	J9	SB-link connector	JP5
CPU fan power	J17	32-bit PCI slots	PC1 - PC5
IDE interface 2	J18		

USER CONFIGURABLE SETTINGS

Function		Label	Position
»	Factory configured - do not alter	J15	Unidentified
»	CMOS memory normal operation	JP4	Pins 1 & 2 closed
	CMOS memory clear	JP4	Pins 2 & 3 closed

DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2	Bank 3
8MB	(1) 1M x 64	None	None	None
16MB	(1) 2M x 64	None	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None	None

24MB	(1) 2M x 64	(1) 1M x 64	None	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64	None
32MB	(1) 4M x 64	None	None	None
32MB	(1) 2M x 64	(1) 2M x 64	None	None
32MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
40MB	(1) 4M x 64	(1) 1M x 64	None	None
48MB	(1) 4M x 64	(1) 2M x 64	None	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64	None
64MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 8M x 64	None	None	None

DIMM CONFIGURATION (CON'T)				
Size	Bank 0	Bank 1	Bank 2	Bank 3
64MB	(1) 4M x 64	(1) 4M x 64	None	None
72MB	(1) 8M x 64	(1) 1M x 64	None	None
80MB	(1) 8M x 64	(1) 2M x 64	None	None
96MB	(1) 8M x 64	(1) 4M x 64	None	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	None
128MB	(1) 16M x 64	None	None	None
128MB	(1) 8M x 64	(1) 8M x 64	None	None
128MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
136MB	(1) 16M x 64	(1) 1M x 64	None	None
144MB	(1) 16M x 64	(1) 2M x 64	None	None
152MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 4M x 64	None	None
176MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64

192MB	(1) 16M x 64	(1) 8M x 64	None	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	None
224MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
256MB	(1) 16M x 64	(1) 16M x 64	None	None
256MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
272MB	(1) 16M x 64	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
288MB	(1) 16M x 64	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
320MB	(1) 16M x 64	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
320MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	None
512MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
Note: Board accepts SDRAM memory.				

CACHE CONFIGURATION

Note: 256KB/512KB cache is located on the Pentium II CPU.

CPU SPEED SELECTION

CPU speed	Clock speed	Multiplier	S1/1	S1/2	S1/3	S1/4
233MHz	66MHz	3.5x	Off	Off	Off	Off
266MHz	66MHz	4x	Off	Off	Off	Off
300MHz	66MHz	4.5x	Off	Off	Off	Off
300MHz	100MHz	3x	Off	Off	Off	Off
333MHz	66MHz	5x	Off	Off	Off	Off
350MHz	100MHz	3.5x	Off	Off	Off	Off
400MHz	100MHz	4x	Off	Off	Off	Off
450MHz	100MHz	4.5x	Off	Off	Off	Off

CPU SPEED SELECTION (CON'T)						
CPU speed	Clock speed	Multiplier	S1/5	S1/6	S1/7	S1/8
233MHz	66MHz	3.5x	On	Off	Off	On
266MHz	66MHz	4x	Off	On	On	On
300MHz	66MHz	4.5x	Off	On	Off	On
300MHz	100MHz	3x	On	Off	On	On
333MHz	66MHz	5x	Off	Off	On	On
350MHz	100MHz	3.5x	On	Off	Off	On
400MHz	100MHz	4x	Off	On	On	On
450MHz	100MHz	4.5x	Off	On	Off	On