


SUPERPOWER COMPUTER CO., LTD.

SP-7XZA

Device Type	Mainboard
Processor	Celeron
Processor Speed	300/333/366MHz
Chip Set	Intel 440ZX
Audio Chip Set	Creative
Maximum Onboard Memory	256MB (EDO & SDRAM supported)
Cache	128KB (located on the Celeron CPU)
BIOS	Award
Dimensions	305mm x 190mm
I/O Options	32-bit PCI slots (4), 16-bit ISA slots (2), floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, PS/2 keyboard port, serial ports (2), IR connector, USB ports (2), ATX power connector, Wake-on-LAN connector, Audio in - CD-ROM (2), line in, line out, microphone in, game/MIDI port

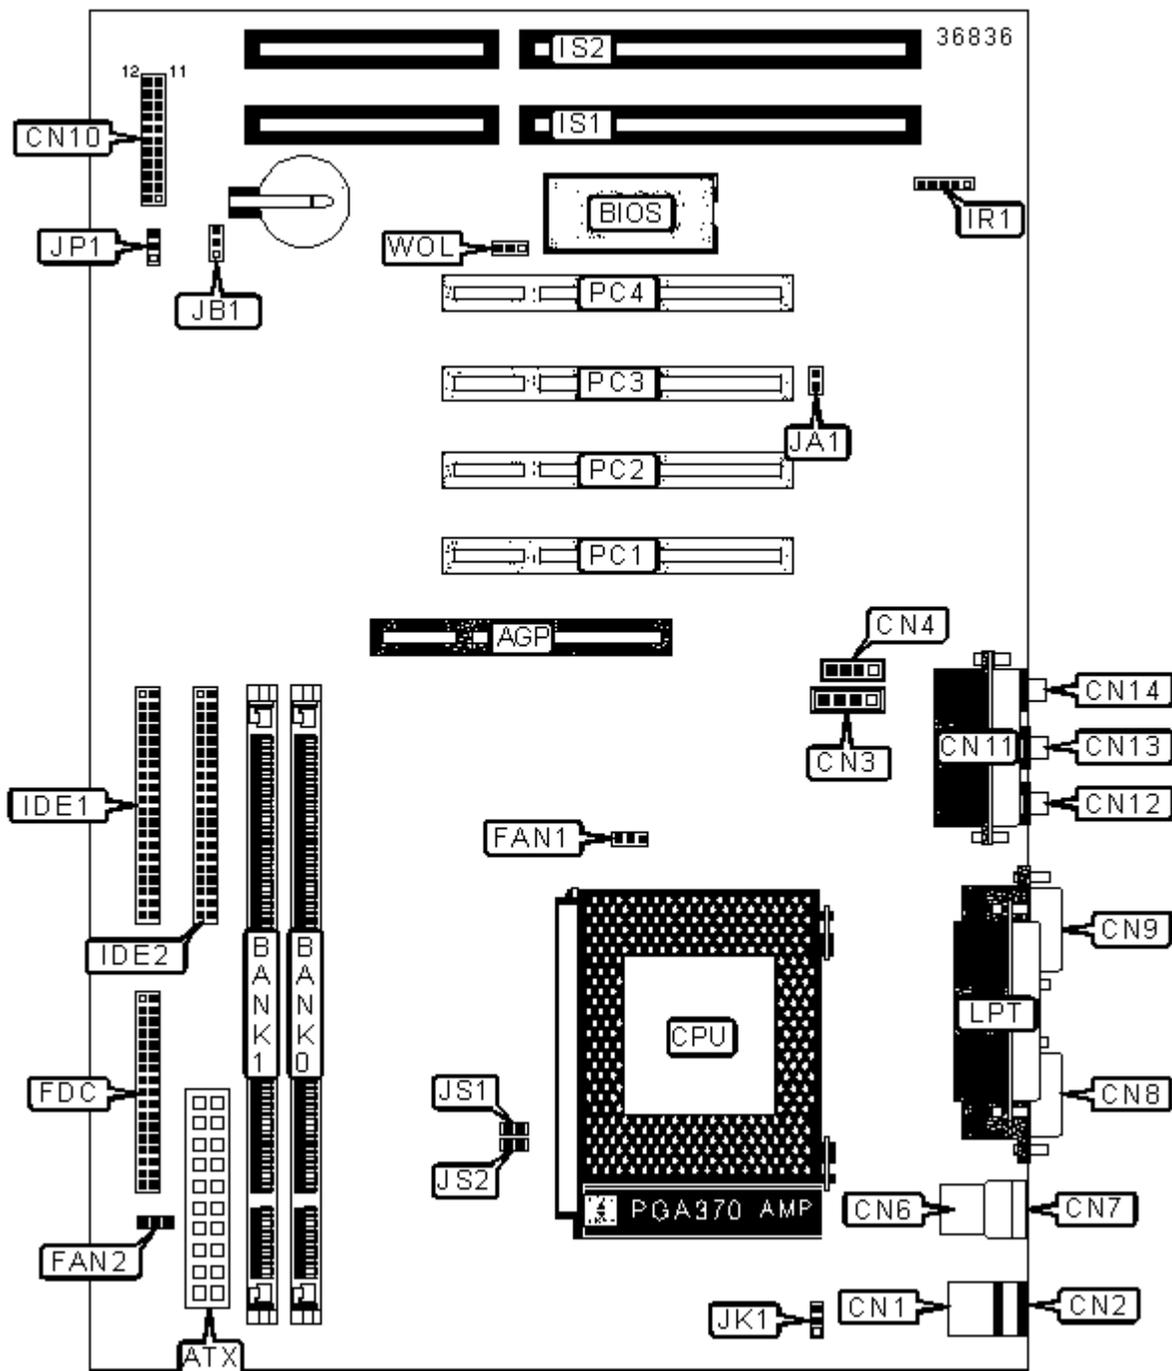

CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	Green PC LED	CN10/Pins 10 & 13
ATX power connector	ATX	Power switch	CN10/Pins 11 & 12
PS/2 mouse port	CN1	Game/MIDI port	CN11
PS/2 keyboard port	CN2	Line out	CN12
Audio in - CD-ROM	CN3	Line in	CN13

Audio in - CD-ROM	CN4	Microphone in	CN14
USB port 1	CN6	CPU fan 1	FAN1
USB port 2	CN7	System fan 2	FAN2
Serial port 1	CN8	Floppy drive interface	FDC
Serial port 2	CN9	IDE interface 1	IDE1
Power LED & keylock	CN10/Pins 1 - 5	IDE interface 2	IDE2
PC speaker	CN10/Pins 19 - 22	IR connector	IR1
IDE interface LED	CN10/Pins 6 & 17	16-bit ISA slots	IS1 - IS2
Green PC switch	CN10/Pins 7 & 16	Parallel Port	LPT
Reset switch	CN10/Pins 8 & 15	32-bit PCI slots	PC1 - PC4
Turbo LED	CN10/Pins 9 & 14	Wake-on-LAN connector	WOL

USER CONFIGURABLE SETTINGS

Function		Label	Position
»	On board sound enabled	JA1	Closed
	On board sound disabled	JA1	Open
»	CMOS memory normal operation	JB1	Pins 1 & 2 closed
	CMOS memory clear	JB1	Pins 2 & 3 closed
	Keyboard wake-up enabled	JK1	Pins 2 & 3 closed
	Keyboard wake-up disabled	JK1	Pins 1 & 2 closed
»	Power up on AC recovery disabled	JP1	Pins 1 & 2 closed
	Power up on AC recovery enabled	JP1	Pins 2 & 3 closed
	CPU bus clock select 66MHz	JS1	Closed
	CPU bus clock select 100MHz	JS1	Open
	CPU bus clock select automatic - overrides JS1	JS2	Closed
	CPU bus clock select controlled by JS1	JS2	Open

DIMM CONFIGURATION

Size	Bank 0	Bank 1
16MB	(1) 2M x 64	None
32MB	(1) 2M x 64	(1) 2M x 64
32MB	(1) 4M x 64	None
64MB	(1) 4M x 64	(1) 4M x 64
64MB	(1) 8M x 64	None
128MB	(1) 8M x 64	(1) 8M x 64
128MB	(1) 16M x 64	None
256MB	(1) 16M x 64	(1) 16M x 64

Note: Board supports EDO & SDRAM memory.

CACHE CONFIGURATION

Note: 128KB cache is located on the Celeron 300A and greater CPUs.