


CB581X-VI JUMPER TABLE

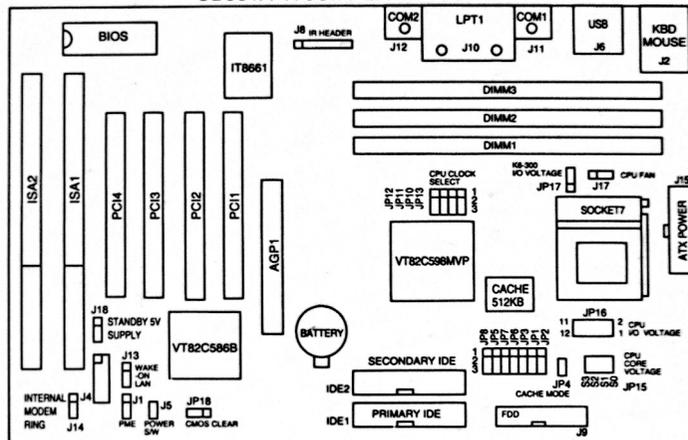

CPU Clock	BUS Clock		Clock Factor	CPU CORE VOLT					BUS CLOCK SELECTION				CLOCK MULTIPLIER			SRAM CLOCK				CACHE MODE JP6		
	CPU	AGP		VOLT	JP15 S3	JP15 S2	JP15 S1	JP15 S0	JP12	JP11	JP10	JP5	JP7	JP3	JP1	JP2	JP13	JP6	JP13		JP6	
Intel - MMX																						
166	66	66	2.5	2.8	O	X	X	X	2-3	2-3	1-2	1-2	2-3	1-2	2-3	2-3	1-2	2-3	2-3	1-2	X	
200	66	66	3.0	2.8	O	X	X	X	2-3	2-3	1-2	1-2	2-3	1-2	2-3	1-2	2-3	2-3	1-2	X		
233	66	66	3.5	2.8	O	X	X	X	2-3	2-3	1-2	1-2	2-3	1-2	2-3	1-2	2-3	2-3	1-2	X		
AMD- K6																						
.K6-2																						
233	66	66	3.5	2.9	O	X	X	O	2-3	2-3	1-2	1-2	2-3	1-2	2-3	1-2	2-3	2-3	1-2	X		
266	66	66	4.0	2.2	X	X	O	X	2-3	2-3	1-2	1-2	2-3	2-3	1-2	2-3	1-2	2-3	2-3	1-2	X	
300	66	66	4.5	2.2	X	X	O	X	2-3	2-3	1-2	1-2	2-3	2-3	2-3	2-3	1-2	2-3	2-3	1-2	X	
300	100	66	3.0	2.2	X	X	O	X	1-2	1-2	1-2	2-3	1-2	1-2	2-3	1-2	1-2	2-3	2-3	1-2	X	
333	95	64	3.5	2.2	X	X	O	X	1-2	1-2	2-3	2-3	1-2	1-2	1-2	1-2	1-2	2-3	2-3	1-2	X	
350	100	66	3.5	2.2	X	X	O	X	1-2	1-2	1-2	2-3	1-2	1-2	1-2	1-2	1-2	2-3	2-3	1-2	X	
400 *1	100	66	4.0	2.2	X	X	O	X	1-2	1-2	1-2	2-3	1-2	2-3	1-2	2-3	1-2	2-3	2-3	1-2	X	
CYRIX/IBM																						
-MX, MII																						
PR200(166)	66	66	2.5	2.9	O	X	X	O	2-3	2-3	1-2	1-2	2-3	1-2	2-3	2-3	1-2	2-3	2-3	1-2	O	
PR200(150)	75	60	2.0	2.9	O	X	X	O	1-2	2-3	2-3	1-2	1-2	1-2	1-2	2-3	1-2	2-3	2-3	1-2	O	
PR233(186)	75	60	2.5	2.9	O	X	X	O	1-2	2-3	2-3	1-2	1-2	1-2	1-2	2-3	2-3	1-2	2-3	2-3	1-2	O
PR233(200)	66	66	3.0	2.9	O	X	X	O	2-3	2-3	1-2	1-2	2-3	1-2	1-2	2-3	1-2	1-2	2-3	2-3	1-2	O
PR266(208)	83	66	2.5	2.7	X	O	O	O	1-2	2-3	1-2	1-2	1-2	1-2	1-2	2-3	2-3	1-2	2-3	2-3	1-2	O
PR300(233)	66	66	3.5	2.9	O	X	X	O	2-3	2-3	1-2	1-2	2-3	1-2	1-2	1-2	1-2	1-2	2-3	2-3	1-2	O
PR333(250)	83	66	3.0	2.2	X	X	O	X	1-2	2-3	1-2	1-2	1-2	1-2	1-2	2-3	1-2	1-2	2-3	2-3	1-2	O

\* NOTE: X: OPEN, O:CLOSE \*1: NOT TESTED

JP16	CORE/IO DUAL VOLT.	CORE/IO SINGLE VOLT.
	7-8, 9-10, 11-12	1-2, 3-4, 5-6