


NMC INTERNATIONAL

NMC 6BCX+

Device Type	Mainboard
Processor	Pentium II
Processor Speed	200/233/266/300/333/350/366/400/450MHz
Chip Set	Intel 440BX
Maximum Onboard Memory	768MB (SDRAM supported)
Cache	256/512KB (located on the Pentium II CPU)
BIOS	Award
Dimensions	Unidentified
I/O Options	16-bit ISA slots (2), 32-bit PCI slots (5), floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, PS/2 keyboard port, serial ports (2), IR connector, ATX power connector, AGP slot, Wake-on-LAN connector, SB-Link connector, USB ports (2)

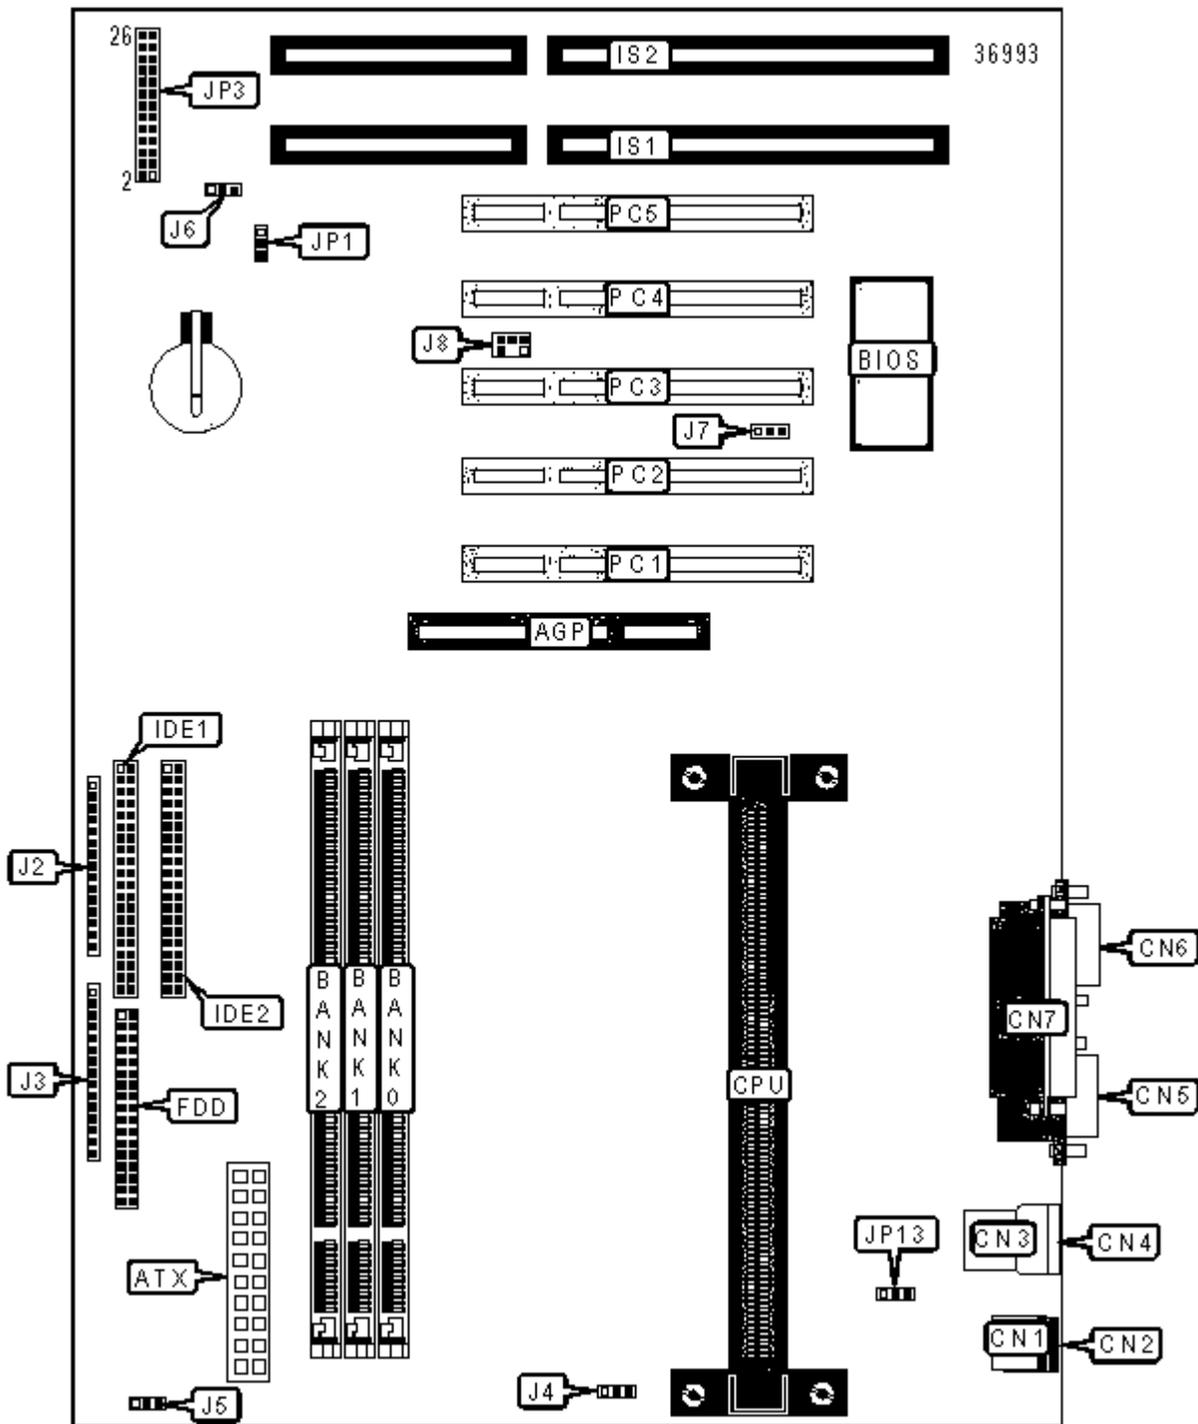

CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	Reset switch	J2/Pins 1 & 2
ATX power connector	ATX	Speaker	J2/Pins 4 - 7
PS/2 mouse port	CN1	Power LED & Keylock	J2/Pins 9 - 13
PS/2 keyboard port	CN2	IR connector	J3/Pins 1 - 5
USB port 1	CN3	IDE connector LED	J3/Pins 7 & 8

USB port 2	CN4	Turbo LED	J3/Pins 9 & 10
Serial port 1	CN5	Power switch	J3/Pins 12 & 13
Serial port 2	CN6	CPU fan power	J4
Parallel port	CN7	Power fan	J5
Floppy drive interface	FDD	Chassis fan power	J6
IDE interface 1	IDE1	Wake-on-LAN connector	J7
IDE interface 2	IDE2	SB-Link connector	J8
16-bit ISA slots	IS1 - IS2	32-bit PCI slots	PC1 - PC5

USER CONFIGURABLE SETTINGS

Function		Label	Position
»	CMOS memory normal operation	JP1	Pins 1 & 2 closed
	CMOS memory clear	JP1	Pins 2 & 3 closed
»	Power on Keyboard disabled	JP13	Pins 2 & 3 closed
	Power on Keyboard enabled	JP13	Pins 1 & 2 closed

DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
16MB	(1) 2M x 64	None	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 2M x 64	(1) 2M x 64	None
32MB	(1) 4M x 64	None	None
32MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64
64MB	(1) 4M x 64	(1) 4M x 64	None

64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64
80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
96MB	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None
128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
256MB	(1) 16M x 64	(1) 16M x 64	None
*256MB	(1) 32M x 64	None	None
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
*272MB	(1) 32M x 64	(1) 1M x 64	(1) 1M x 64
*288MB	(1) 32M x 64	(1) 2M x 64	(1) 2M x 64
*320MB	(1) 32M x 64	(1) 4M x 64	(1) 4M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
*384MB	(1) 32M x 64	(1) 8M x 64	(1) 8M x 64
*512MB	(1) 32M x 64	(1) 32M x 64	None
*512MB	(1) 32M x 64	(1) 16M x 64	(1) 16M x 64
*768MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64

Note: Board supports EDO & SDRAM memory. Maximum SDRAM is 384MB. Maximum EDO is 768MB.
*: Memory configurations require EDO memory.

CACHE CONFIGURATION

Note: 256KB/512KB cache is located on the Pentium II CPUs.

CPU SPEED SELECTION

CPU speed	Clock speed	Multiplier	JP3
200MHz	66MHz	3x	Pins 1 & 2, 15 & 16 closed
233MHz	66MHz	3.5x	Pins 3 & 4, 15 & 16 closed
266MHz	66MHz	4x	Pins 5 & 6, 15 & 16 closed
300MHz	66MHz	4.5x	Pins 7 & 8, 15 & 16 closed
300MHz	100MHz	3x	Pins 1 & 2, 17 & 18 closed
333MHz	66MHz	5x	Pins 9 & 10, 15 & 16 closed
350MHz	100MHz	3.5x	Pins 3 & 4, 17 & 18 closed
400MHz	100MHz	4x	Pins 5 & 6, 17 & 18 closed
450MHz	100MHz	4.5x	Pins 7 & 8, 17 & 18 closed