


MORSE TECHNOLOGIES, INC.

K P 2 8 6 M

Processor	80286
Processor Speed	16MHz
Chip Set	SUNTAC
Max. Onboard DRAM	5MB
Cache	None
BIOS	AMI
Dimensions	230mm x 223mm
I/O Options	N/A
NPU Options	80287

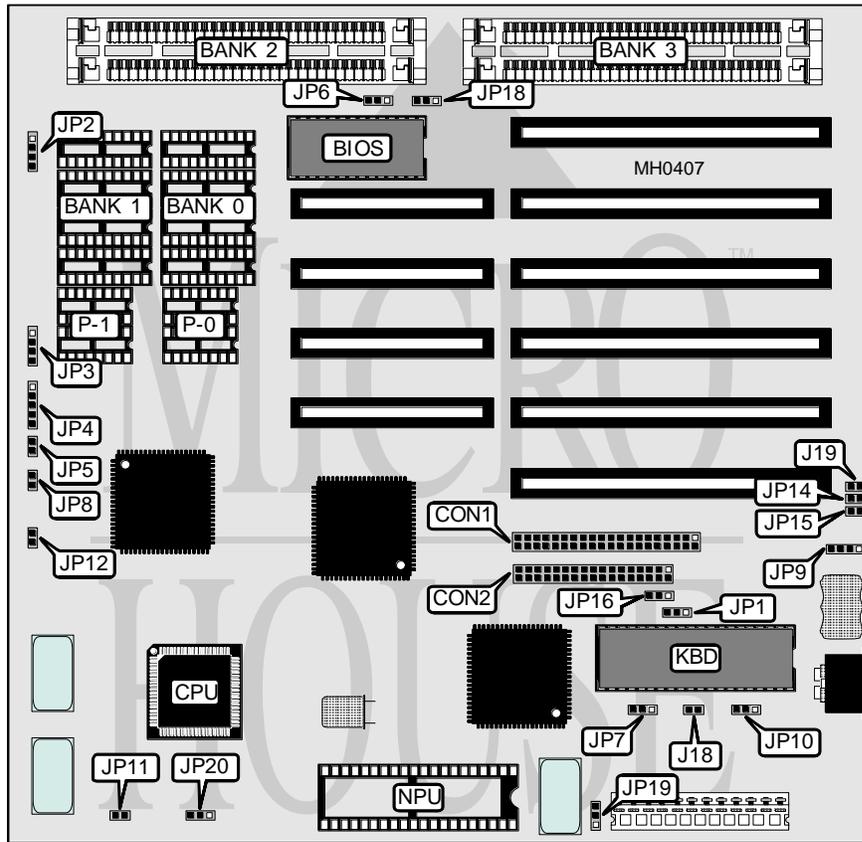

CONNECTIONS			
Purpose	Location	Purpose	Location
IDE interface	CON1	Turbo switch	JP5
Floppy drive interface	CON2	Turbo LED	JP8
Speaker	JP2	External battery	JP9
IDE LED	JP3	Reset switch	JP12
Power LED & keylock	JP4		

Continued on next page . . .

MORSE TECHNOLOGIES, INC.

K P 2 8 6 H F

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Factory configured - do not alter	J18	N/A
í CMOS memory normal operation	J19	Closed
CMOS memory clear	J19	Open
í Primary floppy drive select FDD-1	JP1	Open
Primary floppy drive select FDD-2	JP1	Closed
í Factory configured - do not alter	JP6	N/A
í Factory configured - do not alter	JP7	N/A
í Primary floppy drive interface enabled	JP16	pins 1 & 2 closed
Secondary floppy drive interface enabled	JP16	pins 2 & 3 closed
í Monitor type select color	JP10	pins 2 & 3 closed
Monitor type select monochrome	JP10	pins 1 & 2 closed
í Factory configured - do not alter	JP11	open
í Factory configured - do not alter	JP18	unknown

DRAM CONFIGURATION						
Size	Bank 0	Parity (P-0)	Bank 1	Parity (P-1)	Bank 2	Bank 3
512KB	(4) 44256	(2) 41256	NONE	NONE	NONE	NONE
1MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	NONE	NONE
1.5MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	(2) 256K x 9	NONE
2MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	(2) 256K x 9	(2) 256K x 9
3MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	(2) 1M x 9	NONE
5MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	(2) 1M x 9	(2) 1M x 9

IDE CONFIGURATION		
Setting	JP14	JP15
Enabled	Closed	Closed
Disabled	Open	Open

NPU CONFIGURATION		
Setting	JP19	JP20
Asynchronous	pins 1 & 2 closed	pins 1 & 2 closed
Synchronous	pins 2 & 3 closed	pins 2 & 3 closed