


Socket 754

ASKA® SST-5500ADD

VIA® K8T800 DDR ATX MOTHERBOARD

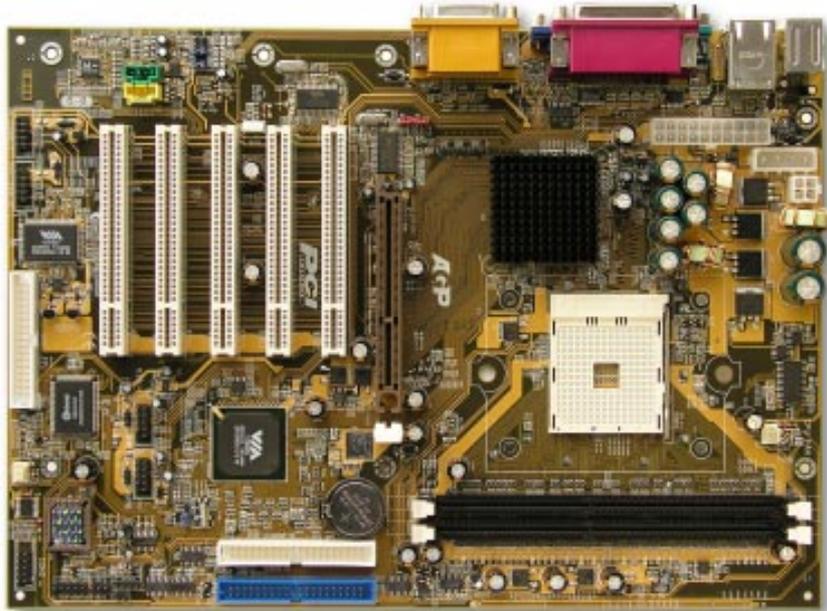

DMI COMPLY



Software Bundle



Processor

- AMD® Hammer® (K8) (Socket 754) (800MHz FSB)

Chip Set

- VIA® K8T800 + 8235CE/8237

BIOS

- Phoenix (Award) PnP Flash ROM BIOS

Memory

- Two DDR Sockets Supports up to 1GB (DDR266/333/400)

Expansion Slot

- One AGP Slot

Five PCI Slots

Graphics

- 8X AGP Slot

Audio

- Integrated AC97 Controller with Standard AC97 Codec

- 6 Channel Audio Codec Support (Optional)

Lan

- Optional 10/100 Mb/s Lan (VIA)

USB 2.0

- Integrated in chipset, USB2.0 x 6 / 8 (8237 only)

IEEE 1394

- Optional Two IEEE 1394 Firewire Ports (Via Cable Adapter)

IDE & Serial ATA-150

- Integrated ATA100/133 and Serial ATA-150 (8237 only) Controller

Storage & IO Connector

- Two Channels Parallel ATA133 Connector (Support up to 4 Devices)

- Two Channels Serial ATA Ports (Support up to 2 Devices)

- One FDD Port (Support 3 Mode, 1.2/1.44/2.88 MB FDD)

- One Audio Port (Line-in, Line-out, MIC-in)

- One PS/2 Mouse Port

- One PS/2 Keyboard Port

- One Parallel Port

- Two Serial Port

- One RJ45 Port

- Six/Eight USB Ports on Back Panel, 4/6 USB on Header with Optional Cable

Software

- PC-cillin2002 Anti Virus

Board Size

- 305mm x 218mm, ATX Form Factor