


Socket 478 (Pentium 4)

ASKA® SST-5651ACD ATI® A4 DDR ATX MOTHERBOARD

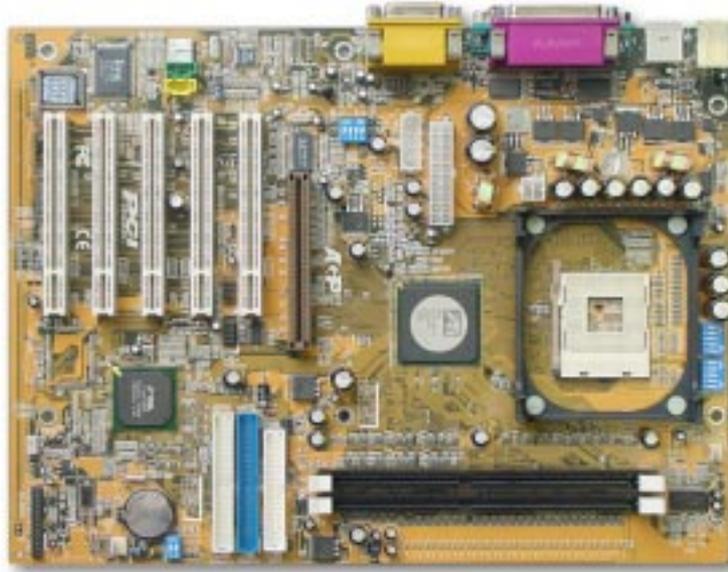

SPECIFICATION : -

| | |
|----------------------------------|--|
| Processor | - Intel® Pentium® 4 (400/533Mhz Front Side Bus) (PGA478 Type). |
| Chip Set | - ATI® A4 (Radeon IGP 340)(400/533MHz FSB) |
| BIOS | - Flash EPROM - Support PnP, APM, ACPI, ATAPI, DMI. - Trend Micro ChipAway Virus Protection. |
| Cache | - L2 Cache is CPU Built-in. |
| Memory | - Two DDR Socket Support up to 1GB (DDR200/266). |
| AGP Graphic On Chip (RV100 CORE) | - Integrated 128-bit 3D/2D Graphics Engines. - HARDWARE MOTION COMPENSATION AND IDCT & HARDWARE MPEG2 DECODE (DVD). - 4 to 64MB Frame Buffer Shared with System Memory. - Integrated 24-bit 300MHz RAMDAC. - Support Dual Display - CRT/TV. |
| (Radeon IGP 340 only) | - Integrated TV Encoder, Macrovision Support, Composite and S-Video Out (Via Cable Adapter), Pal & NTSC Support. - Resolution up to 2048 x 1600 x 32bpp. - DirectX & OpenGL API Support. |
| On Board I/O | - Support Two PCI Enhanced IDEs PIO Mode 3, Mode 4 and Ultra DMA 33/66/100 Channels. Twin Headers for Four IDE Devices Including IDE HDDs and CDROMs. - Support Two FDDs of 360KB, 720KB, 1.2MB, 1.44MB or 2.88MB. - One ECP/EPP Parallel Port, Two 16550A UART Serial Ports, Four USB Ports (Two USB Ports by Optional Adapter Cable), PS/2 Mouse Port, PS/2 Keyboard Port. |
| On Board Sound | - Integrated AC97 Controller with Standard AC97 Codec. - PnP, Full-Duplex, Sound Blaster and Direct Sound Ready. - Line-in, Line-out, Mic-in and MIDI/Game Port . - 6 Channel AC97 Codec (Optional). |
| Expansion Slot | - Five PCI Bus Slots. - One Accelerated Graphics Port (AGP). |
| Plug and Play | - Plug and Play Specification 1.1. - Plug and Play for DOS®, Windows® 3.x, and Windows® 95/98/2000/XP. |
| PC97/98 | - PC97/98 Ready, PC99 Color Connector. |
| Power Management | - Support SMM, APM and ACPI. - Comply to Energy Star "Green PC" Program. - Supports WAKE-ON-LAN (WOL). - Supports Modem Ring-in Wake Up. |
| PCI | - PCI 2.2. |
| AGP | - AGP 2.0 / 1.0. |
| VRM | - On Board VRM 9.0 |
| Battery | - On-board Lithium Battery. |
| Others | - CPU Speed Jumperless. - Alarm Wake-up. - Bundle "PC-cillin" Anti Virus Software. |
| Board Size | - 225mm x 305mm, ATX Form Factor. |



DMI COMPLY



Software Bundle

