


Socket 478 (Pentium 4)

ASKA® SST-5651MCD ATI® A4 DDR MICRO ATX MOTHERBOARD

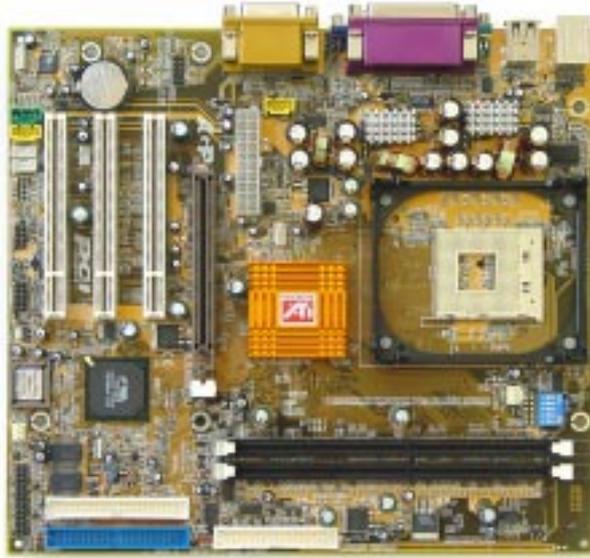

SPECIFICATION : -

Processor	- Intel® Pentium® 4 (400/533Mhz Front Side Bus) (PGA478 Type).
Chip Set	- ATI® A4 (Radeon IGP 340) (400/533MHz FSB)
BIOS	- Flash EPROM - Support PnP, APM, ACPI, ATAPI, DMI. - Trend Micro ChipAway Virus Protection.
Cache	- L2 Cache is CPU Built-in.
Memory	- Two DDR Socket Support up to 1GB (DDR200/266).
AGP Graphic On Chip (RV100 CORE)	- Integrated 128-bit 3D/2D Graphics Engines. - HARDWARE MOTION COMPENSATION AND IDCT & HARDWARE MPEG2 DECODE (DVD). - 4 to 64MB Frame Buffer Shared with System Memory. - Integrated 24-bit 300MHz RAMDAC. - Support Dual Display - CRT/TV.
(Radeon IGP 340 only)	- Integrated TV Encoder, Macrovision Support, Composite and S-Video Out (Via Cable Adapter), Pal & NTSC Support. - Resolution up to 2048 x 1600 x 32bpp. - DirectX & OpenGL API Support.
On Board I/O	- Support Two PCI Enhanced IDEs PIO Mode 3, Mode 4 and Ultra DMA 33/66/100 Channels. Twin Headers for Four IDE Devices Including IDE HDDs and CDROMs. - Support Two FDDs of 360KB, 720KB, 1.2MB, 1.44MB or 2.88MB. - One ECP/EPP Parallel Port, Two 16550A UART Serial Ports, Four USB Ports (Two USB Ports by Optional Adapter Cable), PS/2 Mouse Port, PS/2 Keyboard Port
On Board Sound	- Integrated AC97 Controller with Standard AC97 Codec. - PnP, Full-Duplex, Sound Blaster and Direct Sound Ready. - Line-in, Line-out, Mic-in and MIDI/Game Port . - 6 Channel AC97 Codec (Optional).
Expansion Slot	- Three PCI Bus Slots. - One Accelerated Graphics Port (AGP).
Plug and Play	- Plug and Play Specification 1.1. - Plug and Play for DOS®, Windows® 3.x, and Windows® 95/98/2000/XP.
PC97/98	- PC97/98 Ready, PC99 Color Connector.
Power Management	- Support SMM, APM and ACPI. - Comply to Energy Star "Green PC" Program. - Supports WAKE-ON-LAN (WOL). - Supports Modem Ring-in Wake Up.
PCI	- PCI 2.2.
AGP	- AGP 2.0 / 1.0.
VRM	- On Board VRM 9.0
Battery	- On-board Lithium Battery.
Others	- CPU Speed Jumperless. - Alarm Wake-up. - Bundle "PC-cillin" Anti Virus Software.
Board Size	- 230mm x 244mm, Micro ATX Form Factor.



DMI COMPLY



Software Bundle

