


Slot 1



SST-5724

INTEL 440BX BABY AT MOTHERBOARD

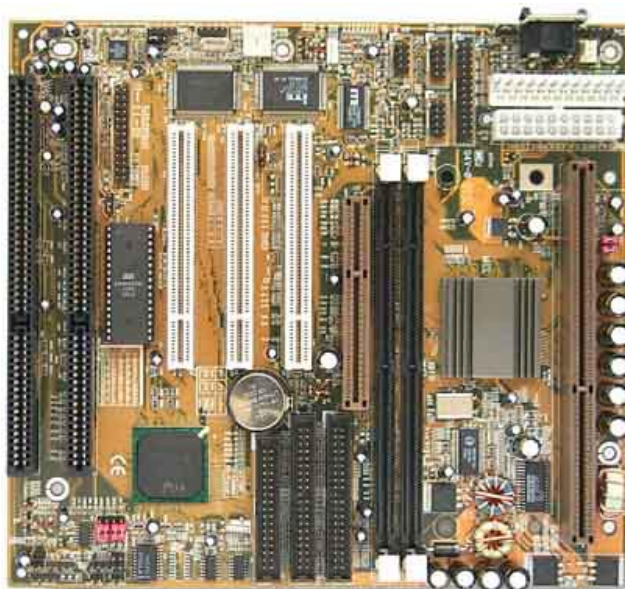

SPECIFICATION : -



DMI COMPLY



Software Bundle



Processor	- Intel® Pentium® II/III & Celeron® (66/100Mhz Front Side Bus) (Slot 1 Type). - 233/266/300/333/350/366/400/433/450/466/500/533/550/600/650/667/700MHz or above.
Chip Set	- Intel® 440BX
BIOS	- 2M Flash EPROM (Support PnP, APM, ACPI, ATAPI, DMI). - IDE AUTO LBA Mode Supports HDDs over 8.4GB. - Trend Micro ChipAway Virus Protection.
Cache	- L2 Cache is CPU Built-in.
Memory	- Size up to 256MB. - Two 168-pins DIMMs. - DIMMs Depth of 1MB, 2MB, 4MB, 8MB, 16MB and 32MB.
On Board I/O	- Support Two PCI Enhanced IDEs PIO Mode 3, Mode 4 and Ultra DMA 33 Channels. Twin Headers for Four IDE Devices Including IDE HDDs and CD ROMs. - Support Two FDDs of 360KB, 720KB, 1.2MB, 1.44MB or 2.88MB. - One ECP/EPP Parallel Port. Two 16550A UART Serial Ports. - Two USB Ports (Optional Adapter Cable). - PS/2 Mouse Port (Optional Adapter Cable). Keyboard Port. - IrDA Port (Optional TX/RX Module).
On Board Sound	- Creative ES1373 PCI Sound Chip. - PnP, Creative 3D Enhancement, Wave Synth Wave Table. - Full-Duplex, Sound Blaster 16 Compatible.
Expansion Slot	- Line-in, Line-out, Mic-in and MIDI/Game Port (via Cable). - Two ISA Bus Slots (One PCI Shared Slot). - Three PCI Bus Slots (One ISA Shared Slot). - One Accelerated Graphics Port (AGP).
Plug and Play	- Plug and Play Specification 1.1. - Plug and Play for DOS®, Windows® 3.x, and Windows® 95.
PC97/98	- PC97/98 Ready, PC99 Color Connector.
Power Management	- Support SMM, APM and ACPI. - Comply to Energy Star "Green PC" Program. - Supports WAKE-ON-LAN (WOL). - Supports Modem Ring-in Wake Up.
PCI	- PCI 2.1.
AGP	- AGP 1.0.
VRM	- On Board VRM 8.4.
Battery	- On-board Lithium Battery.
Others	- CPU Frequency Multiplier Jumperless (optional). - Alarm Wake-up.
Board Size	- Bundle "PC-cillin 6" Anti Virus Software - 200mm x 220mm, Baby AT Form Factor.