


# Slot 1



# SST-5733

## INTEL 440ZX BABY AT MOTHERBOARD

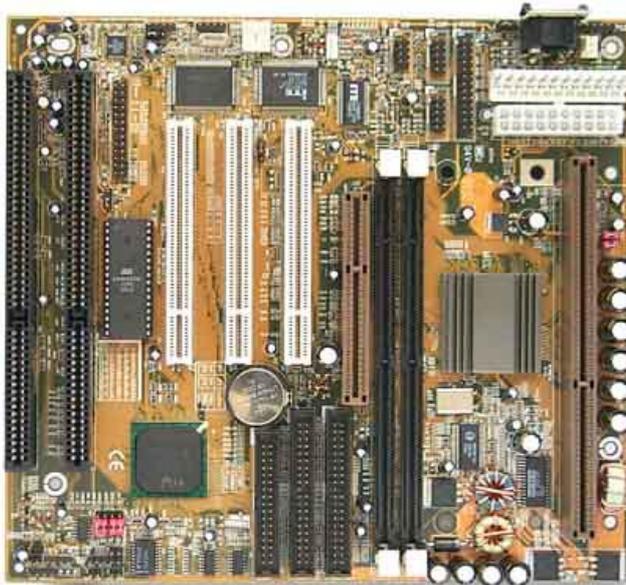

### SPECIFICATION :-



DMI COMPLY



#### Software Bundle



|                  |   |
|------------------|---|
| Processor        | <ul style="list-style-type: none"><li>- Intel® Pentium® II/III &amp; Celeron® (66/100Mhz Front Side Bus) (Slot 1 Type).</li><li>- 233/266/300/333/350/366/400/433/450/466/500/533/550/600/650/667/700MHz or above.</li></ul>  |
| Chip Set         | <ul style="list-style-type: none"><li>- Intel® 440ZX</li></ul>  |
| BIOS             | <ul style="list-style-type: none"><li>- 2M Flash EPROM (Support PnP, APM, ACPI, ATAPI, DMI).</li><li>- IDE AUTO LBA Mode Supports HDDs over 8.4GB.</li><li>- Trend Micro ChipAway Virus Protection.</li></ul>   |
| Cache            | <ul style="list-style-type: none"><li>- L2 Cache is CPU Built-in.</li></ul>   |
| Memory           | <ul style="list-style-type: none"><li>- Size up to 256MB.</li><li>- Two 168-pins DIMMs.</li><li>- DIMMs Depth of 1MB, 2MB, 4MB, 8MB, 16MB and 32MB.</li></ul>   |
| On Board I/O     | <ul style="list-style-type: none"><li>- Support Two PCI Enhanced IDEs PIO Mode 3, Mode 4 and Ultra DMA 33 Channels.</li><li>- Twin Headers for Four IDE Devices Including IDE HDDs and CD ROMs.</li><li>- Support Two FDDs of 360KB, 720KB, 1.2MB, 1.44MB or 2.88MB.</li><li>- One ECP/EPP Parallel Port. Two 16550A UART Serial Ports.</li><li>- Two USB Ports (Optional Adapter Cable).</li><li>- PS/2 Mouse Port (Optional Adapter Cable). Keyboard Port.</li><li>- IrDA Port (Optional TX/RX Module).</li></ul> |
| On Board Sound   | <ul style="list-style-type: none"><li>- Creative ES1373 PCI Sound Chip.</li><li>- PnP, Creative 3D Enhancement, Wave Synth Wave Table.</li><li>- Full-Duplex, Sound Blaster 16 Compatible.</li></ul>  |
| Expansion Slot   | <ul style="list-style-type: none"><li>- Line-in, Line-out, Mic-in and MIDI/Game Port (via Cable).</li><li>- Two ISA Bus Slots (One PCI Shared Slot).</li><li>- Three PCI Bus Slots (One ISA Shared Slot).</li><li>- One Accelerated Graphics Port (AGP).</li></ul>  |
| Plug and Play    | <ul style="list-style-type: none"><li>- Plug and Play Specification 1.1.</li></ul>  |
| PC97/98          | <ul style="list-style-type: none"><li>- Plug and Play for DOS®, Windows® 3.x, and Windows® 95.</li></ul>  |
| Power Management | <ul style="list-style-type: none"><li>- PC97/98 Ready, PC99 Color Connector.</li><li>- Support SMM, APM and ACPI.</li><li>- Comply to Energy Star "Green PC" Program.</li><li>- Supports WAKE-ON-LAN (WOL).</li><li>- Supports Modem Ring-in Wake Up.</li></ul>   |
| PCI              | <ul style="list-style-type: none"><li>- PCI 2.1.</li></ul>  |
| AGP              | <ul style="list-style-type: none"><li>- AGP 1.0.</li></ul>  |
| VRM              | <ul style="list-style-type: none"><li>- On Board VRM 8.4.</li></ul>   |
| Battery          | <ul style="list-style-type: none"><li>- On-board Lithium Battery.</li></ul>   |
| Others           | <ul style="list-style-type: none"><li>- CPU Frequency Multiplier Jumperless (optional).</li><li>- Alarm Wake-up.</li></ul>  |
| Board Size       | <ul style="list-style-type: none"><li>- Bundle "PC-cillin 6" Anti Virus Software</li><li>- 200mm x 220mm, Baby AT Form Factor.</li></ul>  |