


PCI486 V1-HJ3

ALi M1489/87 (FinALi-486 PCI Chipset)

FPM/EDO memory supported

AMD486xx/Cyrix486xx/Intel 486xx supported, Intel PODP supported.

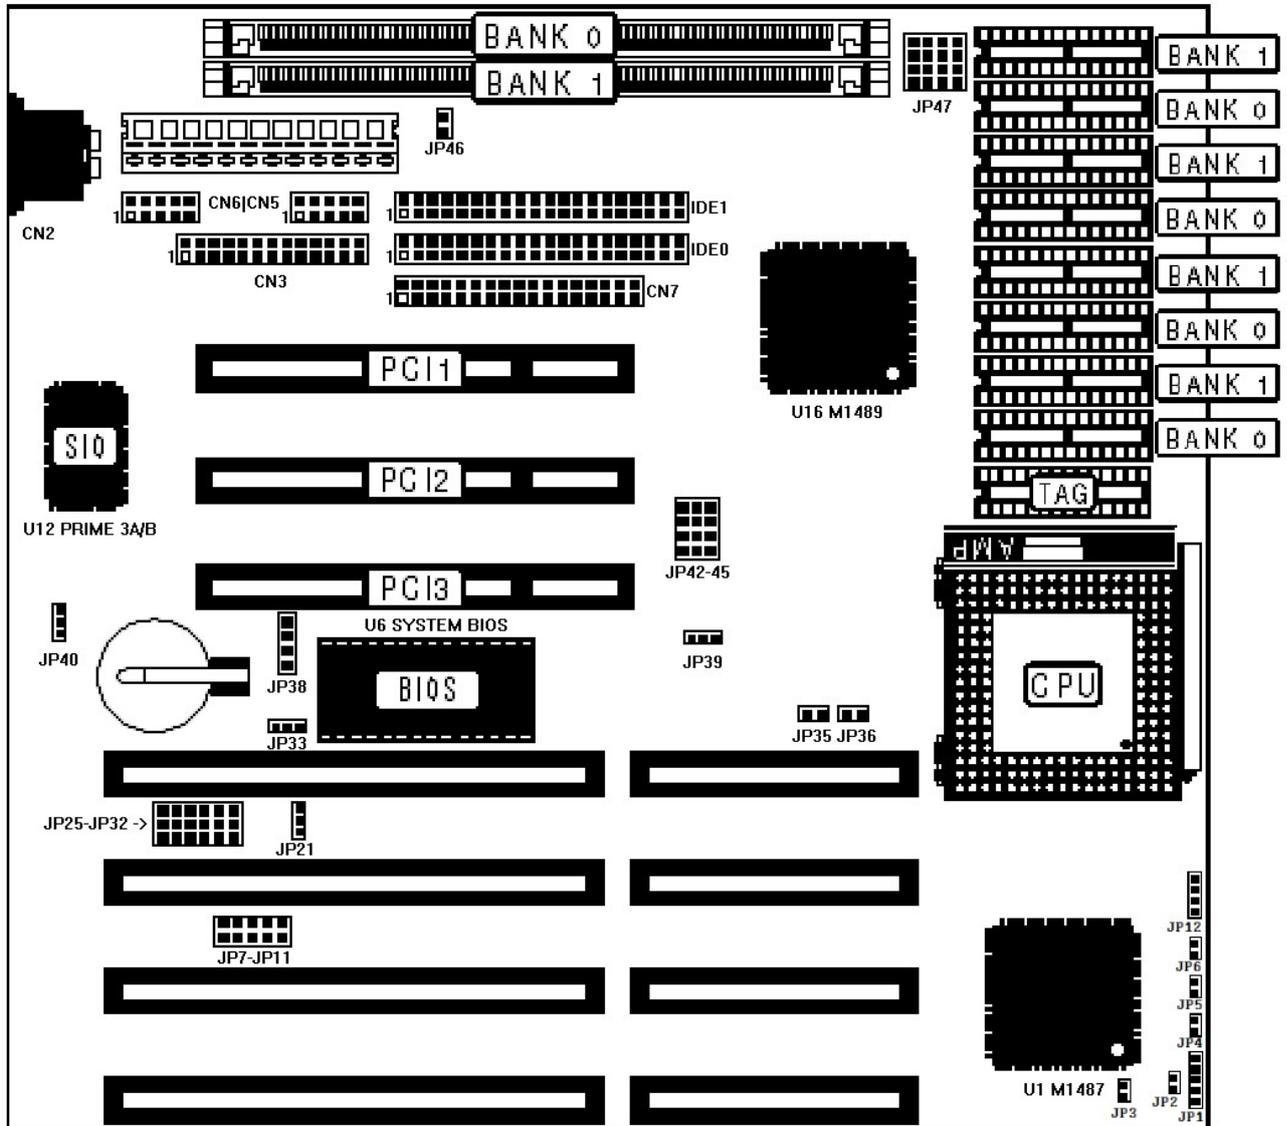

CPU Voltage	JP42	JP43	JP44	JP45
* 3.3V	OFF	1-2	2-3	2-3
3.45V	OFF	2-3	2-3	2-3
3.6V	1-2	OFF	2-3	2-3
4V	2-3	OFF	2-3	2-3
5V	OFF	OFF	1-2	1-2

Connector	Purpose
IDE0	Primary IDE Channel
IDE1	Secondary IDE Channel
JP46	HDD LED
CN7	Floppy Drive
CN3	LPT 1
CN5	COM 1
CN6	COM 2
CN2	Keyboard
JP12	PC Speaker
JP1	Keylock + Power LED
JP5	Turbo LED
JP4	Reset Switch
JP6	Turbo Switch
JP3	???????
JP2	???????

Jumper	1-2 Function	2-3 Function
JP40	SIO FDC Enable (?)	SIO FDC Disable (?)
JP39	PCI CLK = FSB CLK	PCI CLK = FSB/2
JP28	Set COM 1 to IRQ 4?	Set COM 1 to IRQ 3?
JP29	Set COM 2 to IRQ 4?	Set COM 2 to IRQ 3?
JP26	Set ECP LPT to DMA 3	Set ECP LPT to DMA 1
JP27	Set ECP LPT to DMA 3	Set ECP LPT to DMA 1