


Socket 370

ASKA SST-5773 INTEL 440ZX BABY AT MOTHERBOARD



SPECIFICATION :-

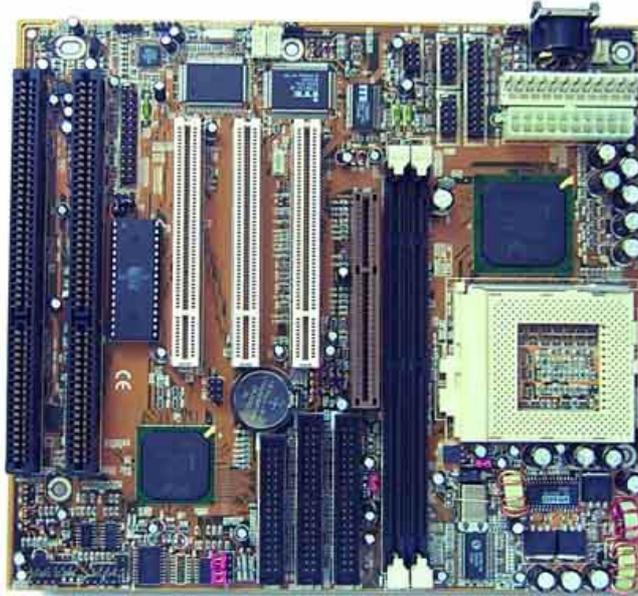

DMI COMPLY



Software Bundle



Processor	<ul style="list-style-type: none">- Intel® Pentium® III & Celeron® (66/100Mhz Front Side Bus) (PGA 370 Type).- 300/333/350/366/400/433/450/466/500/533/550/600/650/667/700MHz or above.
Chip Set	<ul style="list-style-type: none">- Intel® 440ZX
BIOS	<ul style="list-style-type: none">- 2M Flash EPROM (Support PnP, APM, ACPI, ATAPI, DMI).- IDE AUTO LBA Mode Supports HDDs over 8.4GB.- Trend Micro ChipAway Virus Protection.
Cache	<ul style="list-style-type: none">- L2 Cache is CPU Built-in.
Memory	<ul style="list-style-type: none">- Size up to 256MB.- Two 168-pins DIMMs.- DIMMs Depth of 1MB, 2MB, 4MB, 8MB, 16MB and 32MB.
On Board I/O	<ul style="list-style-type: none">- Support Two PCI Enhanced IDEs PIO Mode 3, Mode 4 and Ultra DMA 33 Channels.- Twin Headers for Four IDE Devices Including IDE HDDs and CD ROMs.- Support Two FDDs of 360KB, 720KB, 1.2MB, 1.44MB or 2.88MB.- One ECP/EPP Parallel Port. Two 16550A UART Serial Ports.- Two USB Ports (Optional Adapter Cable).- PS/2 Mouse Port (Optional Adapter Cable). Keyboard Port.- IrDA Port (Optional TX/RX Module).
On Board Sound	<ul style="list-style-type: none">- Creative ES1373 PCI Sound Chip.- PnP, Creative 3D Enhancement, Wave Synth Wave Table.- Full-Duplex, Sound Blaster 16 Compatible.- Line-in, Line-out, Mic-in and MIDI/Game Port (via Cable).
Expansion Slot	<ul style="list-style-type: none">- Two ISA Bus Slots (One PCI Shared Slot).- Three PCI Bus Slots (One ISA Shared Slot).- One Accelerated Graphics Port (AGP).
Plug and Play	<ul style="list-style-type: none">- Plug and Play Specification 1.1.- Plug and Play for DOS®, Windows® 3.x, and Windows® 95.
PC97/98	<ul style="list-style-type: none">- PC97/98 Ready, PC99 Color Connector.
Power Management	<ul style="list-style-type: none">- Support SMM, APM and ACPI.- Comply to Energy Star "Green PC" Program.- Supports WAKE-ON-LAN (WOL).- Supports Modem Ring-in Wake Up.
PCI	<ul style="list-style-type: none">- PCI 2.1.
AGP	<ul style="list-style-type: none">- AGP 1.0.
VRM	<ul style="list-style-type: none">- On Board VRM 8.4.
Battery	<ul style="list-style-type: none">- On-board Lithium Battery.
Others	<ul style="list-style-type: none">- CPU Frequency Multiplier Jumperless (optional).- Alarm Wake-up.- Bundle "PC-cillin 6" Anti Virus Software
Board Size	<ul style="list-style-type: none">- 200mm x 220mm, Baby AT Form Factor.