


Socket A

ASKA® SST-5879MB VIA KLE133 MATX MOTHERBOARD

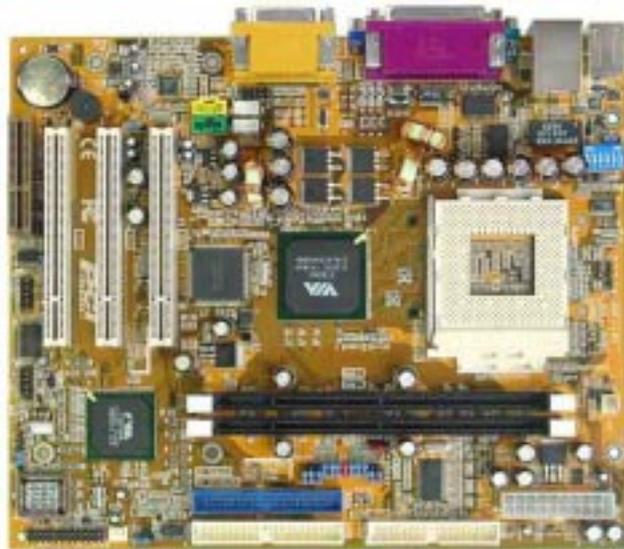

SPECIFICATION : -

<p>Processor</p> <p>Chip Set</p> <p>BIOS</p>	<ul style="list-style-type: none"> - AMD® Athlon® & Duron® (K7) (200/266MHz DDR Front Side Bus) (Socket A). - VIA® KLE133 (8361 + 686B) - Flash EPROM (Support PnP, APM, ACPI, ATAPI, DMI). - IDE AUTO LBA Mode Supports HDDs over 8.4GB. - Trend Micro ChipAway Virus Protection.
<p>Cache</p> <p>Memory</p> <p>On Board I/O</p>	<ul style="list-style-type: none"> - L2 Cache is CPU Built-in. - Two DIMMs Socket Support up to 512MB. - Support Two PCI Enhanced IDEs PIO Mode 3, Mode 4 and Ultra DMA 33/66/100 Channels. Twin Headers for Four IDE Devices Including IDE HDDs and CDROMs. - Support Two FDDs of 360KB, 720KB, 1.2MB, 1.44MB or 2.88MB. - One ECP/EPP Parallel Port, Two 16550A UART Serial Ports, Six USB Ports (Four USB Ports by Optional Adapter Cable), PS/2 Mouse Port, PS/2 Keyboard Port.
<p>On Chip AGP (Trident Blade 3D)</p>	<ul style="list-style-type: none"> - AGP 1.0 Compliant. - Transfer Rate up to 533MB/sec. - 64-bit Single Cycle 2D/3D Graphic Engines. - Support 4 to 8MB Frame Buffer Shared with System Memory. - Integrated 24-bit 230MHz RAMDAC. - Resolution up to 1600 x 1200. - DirectX6 & OpenGL API.
<p>On Board Sound</p>	<ul style="list-style-type: none"> - Integrated hardware accelerated AC97 Controller with Standard AC97 Codec. - PnP, Full-Duplex, Sound Blaster 16 Compatible, Direct Sound Ready. - Line-in, Line-out, Mic-in and MIDI/Game Port .
<p>NS LAN 100mb (optional)</p>	<ul style="list-style-type: none"> - Integrated PCI BUS Master MAC Controller. - Interface with External Physical Layer. - Support 10/100MB Ethernet.
<p>Expansion Slot Plug and Play</p>	<ul style="list-style-type: none"> - Three PCI Bus Slots. - Plug and Play Specification 1.1. - Plug and Play for DOS®, Windows® 3.x, and Windows® 95.
<p>PC97/98 Power Management</p>	<ul style="list-style-type: none"> - PC97/98 Ready, PC99 Color Connector. - Support SMM, APM and ACPI. - Comply to Energy Star "Green PC" Program. - Supports Modem Ring-in Wake Up.
<p>PCI</p> <p>AGP</p> <p>VRM</p> <p>Battery</p> <p>Others</p>	<ul style="list-style-type: none"> - PCI 2.1. - AGP 2.0 / 1.0. - On Board VRM 9.0. - On-board Lithium Battery. - Alarm Wake-up - Bundle "PC-cillin" Anti Virus Software
<p>Board Size</p>	<ul style="list-style-type: none"> - 244mm x 203mm, Micro ATX Form Factor.



DMI COMPLY



Software Bundle

