


# Socket 370



# SST-5898

## VIA APOLLO PRO133 BABY AT MOTHERBOARD

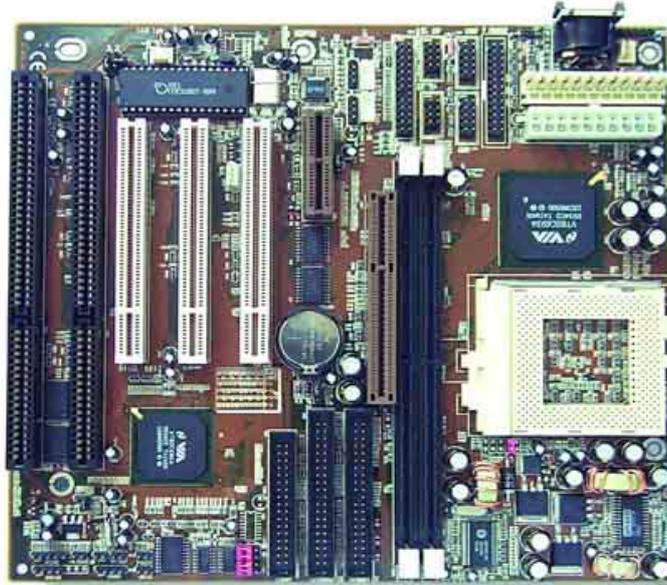

### SPECIFICATION : -

Processor	<ul style="list-style-type: none"><li>- Intel® Pentium® III &amp; Celeron® (66/100/133Mhz Front Side Bus) (PGA370 Type).</li><li>- 300/333/350/366/400/433/450/466/500/533/550/600/650/667/700MHz or above.</li></ul>
Chip Set	<ul style="list-style-type: none"><li>- VIA® Apollo Pro133 (686A + 693A).</li></ul>
BIOS	<ul style="list-style-type: none"><li>- 2M Flash EPROM (Support PnP, APM, ACPI, ATAPI, DMI).</li><li>- IDE AUTO LBA Mode Supports HDDs over 8.4GB.</li><li>- Trend Micro ChipAway Virus Protection.</li></ul>
Cache	<ul style="list-style-type: none"><li>- L2 Cache is CPU Built-in.</li></ul>
Memory	<ul style="list-style-type: none"><li>- Size up to 512MB.</li><li>- Two 168-pins DIMMs.</li><li>- Synchronous DRAM (SDRAM).</li><li>- DIMMs Depth of 1MB, 2MB, 4MB, 8MB, 16MB and 32MB.</li></ul>
On Board I/O	<ul style="list-style-type: none"><li>- Support Two PCI Enhanced IDEs PIO Mode 3, Mode 4 and Ultra DMA 33/66 Channels (Optional Ultra DMA 66 Cable). Twin Headers for Four IDE Devices Including IDE HDDs and CDROMs.</li><li>- Support Two FDDs of 360KB, 720KB, 1.2MB, 1.44MB or 2.88MB.</li><li>- One ECP/EPP Parallel Port. Two 16550A UART Serial Ports.</li><li>- Two USB Ports (Optional Adapter Cable).</li><li>- PS/2 Mouse Port (Optional Adapter Cable). Keyboard Port.</li><li>- IrDA Port (Optional TX/RX Module).</li></ul>
On Board Sound	<ul style="list-style-type: none"><li>- Integrated AC97 Controller with Standard AC97 Codec.</li><li>- PnP, Full-Duplex, Sound Blaster 16 Compatible, Direct Sound Ready.</li></ul>
Expansion Slot	<ul style="list-style-type: none"><li>- Line-in, Line-out, Mic-in and MIDI/Game Port .</li><li>- Two ISA Bus Slots (One PCI Shared Slot).</li><li>- Three PCI Bus Slots (One ISA Shared Slot).</li><li>- One Accelerated Graphics Port (AGP).</li><li>- One Audio Modem Riser (AMR).</li></ul>
Plug and Play	<ul style="list-style-type: none"><li>- Plug and Play Specification 1.1.</li></ul>
PC97/98	<ul style="list-style-type: none"><li>- Plug and Play for DOS®, Windows® 3.x, and Windows® 95.</li></ul>
Power Management	<ul style="list-style-type: none"><li>- PC97/98 Ready.</li><li>- Support SMM, APM and ACPI.</li><li>- Comply to Energy Star "Green PC" Program.</li><li>- Supports Modem Ring-in Wake Up.</li></ul>
PCI	<ul style="list-style-type: none"><li>- PCI 2.1.</li></ul>
AGP	<ul style="list-style-type: none"><li>- AGP 1.0.</li></ul>
VRM	<ul style="list-style-type: none"><li>- On Board VRM 8.4.</li></ul>
Battery	<ul style="list-style-type: none"><li>- On-board Lithium Battery.</li></ul>
Others	<ul style="list-style-type: none"><li>- CPU Frequency Multiplier Jumperless (Optional).</li><li>- Alarm Wake-up</li><li>- Bundle "PC-cillin 6" Anti Virus Software</li></ul>
Board Size	<ul style="list-style-type: none"><li>- 200mm x 220mm, Baby AT Form Factor.</li></ul>



DMI COMPLY



#### Software Bundle

