


ZOLTRIX, INC. AUDIOPLUS 6400 V.2

Card Type
Chip Set
I/O Options

Data Bus
Card Size

Sound card
Unidentified
CD-ROM interface, game/midi port, line in, microphone jack, volume control, speaker/line out, Audio in - CD-ROM, wavetable, 16-bit ISA
Half-length, full-height card

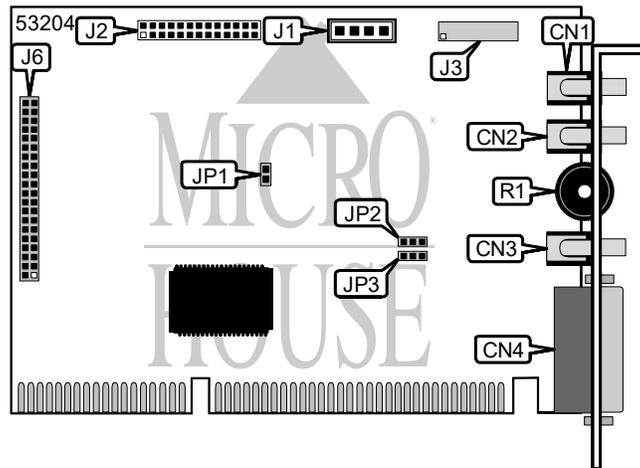

CONNECTIONS			
Function	Label	Function	Label
Line in	CN1	Audio in - CD-ROM (IDE/Sony)	J1
Microphone jack	CN2	Wave table synthesizer connector	J2
Volume control	R1	3D Sound daughter board connector	J3
Speaker/line out	CN3	CD-ROM ATAPI interface	J6
Game/MIDI port	CN4		

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
Plug and play function enable	JP1	Closed	
Plug and play function disable	JP1	Open	

USER CONFIGURABLE SETTINGS (TABLE 2)			
OUTPUT SELECT	JP2		JP3
Power Amplifier	1-2 Closed		1-2 Closed
Line out	2-3 Closed		2-3 Closed

Note: If sound card does not have power amplifier (LM386 IC) built-in, do not select output to power amplifier.