


ACER, INC.

V65X

Configuration

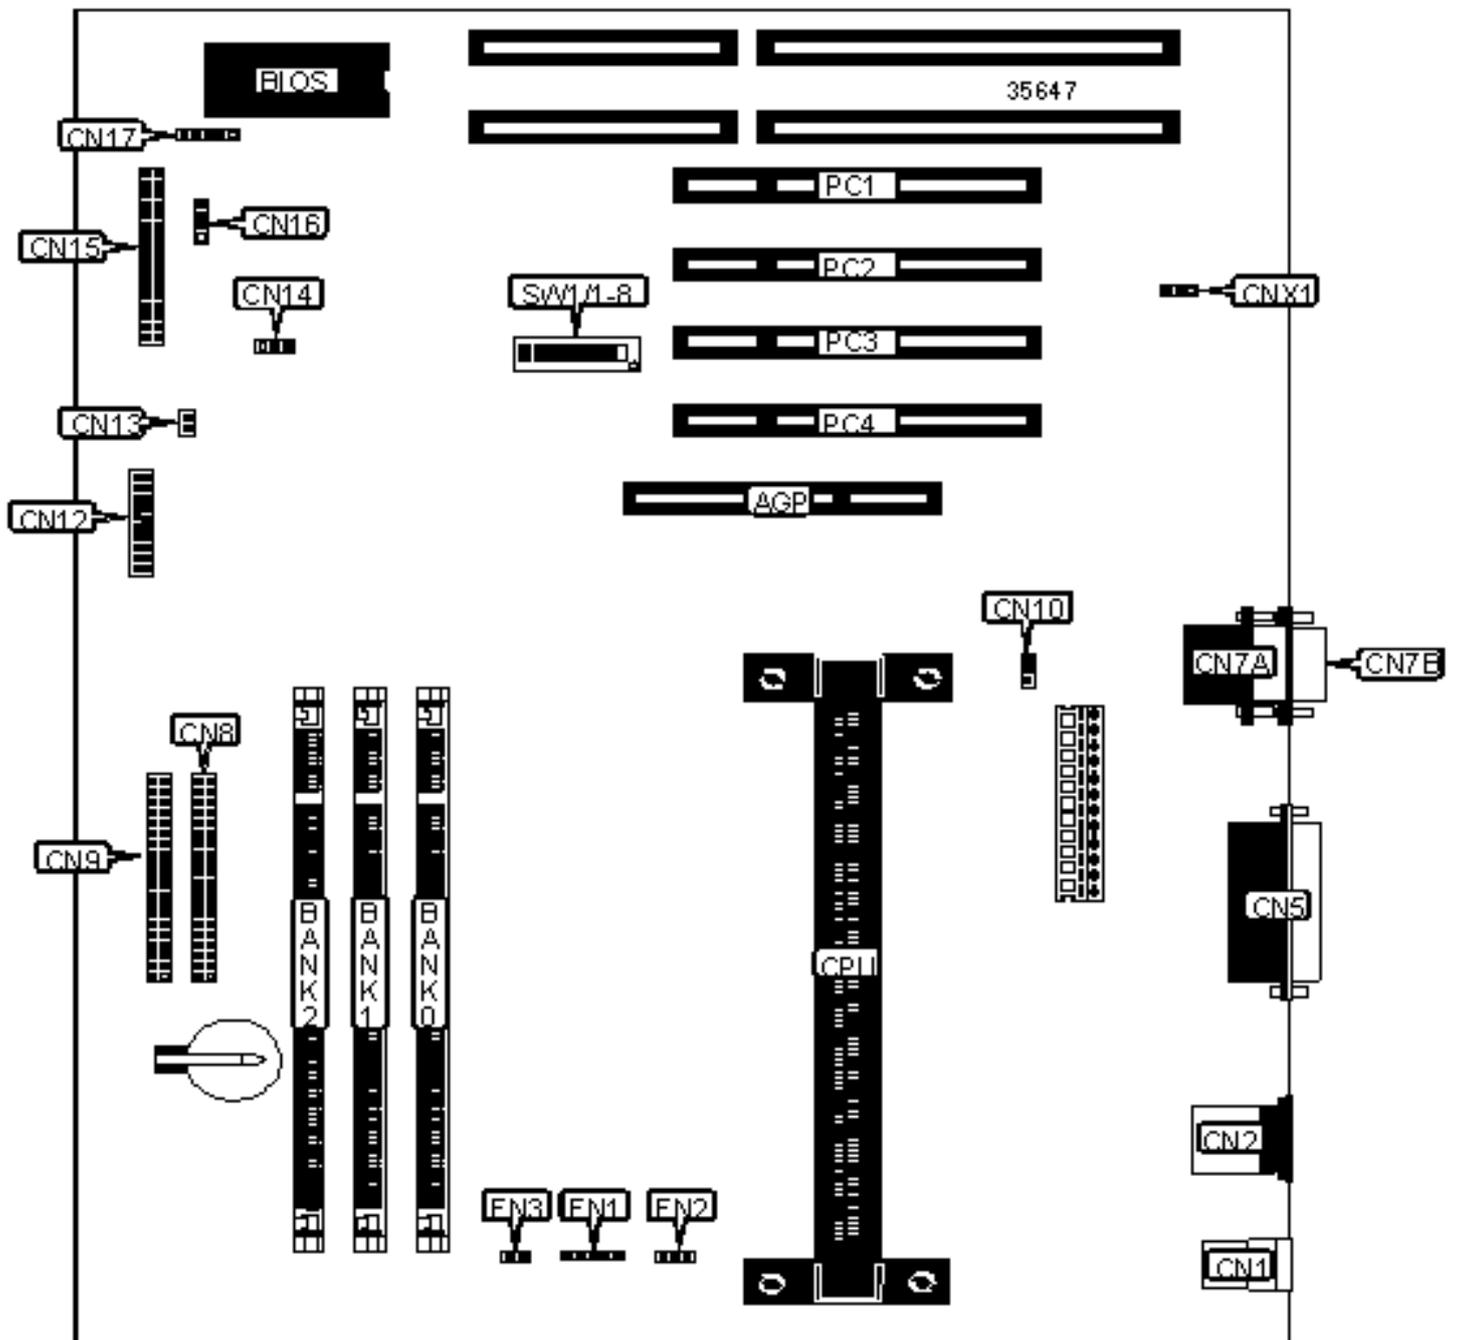

CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	Reset switch	CN12/pins 19 & 20
USB connector	CN1	Soft off power supply	CN13
PS/2 mouse port	CN2	Modem ring connector	CN14
Parallel port	CN5	Floppy drive interface	CN15
Serial port 1	CN7A	IDE interface LED	CN16
Serial port 2	CN7B	IR connector	CN17
IDE interface 2	CN8	Wake on LAN connector	CNX1
IDE interface 1	CN9	CPU fan power	FN1
Green PC LED	CN10	CPU fan power	FN2
Power LED	CN12/pins 3 - 5	CPU fan power	FN3
Turbo LED	CN12/pins 12 - 13	32-bit PCI slots	PC1 - PC4

USER CONFIGURABLE SETTINGS

Function	Label	Position
» Bypass password	SW1/2	On
Check password	SW1/2	Off
» OEM BIOS installed	SW1/3	On
Acer BIOS installed	SW1/3	Off

DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None
16MB	(1) 2M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None

24MB	(1) 2M x 64	(1) 1M x 64	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None	None
32MB	(1) 2M x 64	(1) 2M x 64	None
32MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64
40MB	(1) 4M x 64	(1) 1M x 64	None
48MB	(1) 4M x 64	(1) 2M x 64	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64

DIMM CONFIGURATION (CONT')

Size	Bank 0	Bank 1	Bank 2
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 4M x 64	None
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64
72MB	(1) 8M x 64	(1) 1M x 64	None
80MB	(1) 8M x 64	(1) 2M x 64	None
80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
96MB	(1) 8M x 64	(1) 4M x 64	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
96MB	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 8M x 64	None
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
136MB	(1) 16M x 64	(1) 1M x 64	None
144MB	(1) 16M x 64	(1) 2M x 64	None

144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 4M x 64	None
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
256MB	(1) 16M x 64	(1) 16M x 64	None
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
256MB	(1) 32M x 64	None	None
264MB	(1) 32M x 64	(1) 1M x 64	(1) 1M x 64
272MB	(1) 32M x 64	(1) 2M x 64	None
272MB	(1) 32M x 64	(1) 1M x 64	None
288MB	(1) 32M x 64	(1) 4M x 64	None
288MB	(1) 32M x 64	(1) 2M x 64	(1) 2M x 64
320MB	(1) 32M x 64	(1) 8M x 64	None
320MB	(1) 32M x 64	(1) 4M x 64	(1) 4M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
384MB	(1) 32M x 64	(1) 8M x 64	(1) 8M x 64

CPU SPEED SELECTION (PENTIUM)

CPU speed	Clock speed	Multiplier	SW1/1	SW1/5	SW1/6	SW1/7	SW1/8
233MHz	66MHz	3.5x	Off	On	Off	Off	On
266MHz	66MHz	4x	Off	Off	On	On	On
300MHz	66MHz	4.5x	Off	Off	On	Off	On