


GIGA-BYTE TECHNOLOGY CO., LTD.

GA-6BXC (REV. 1.0)

Configuration

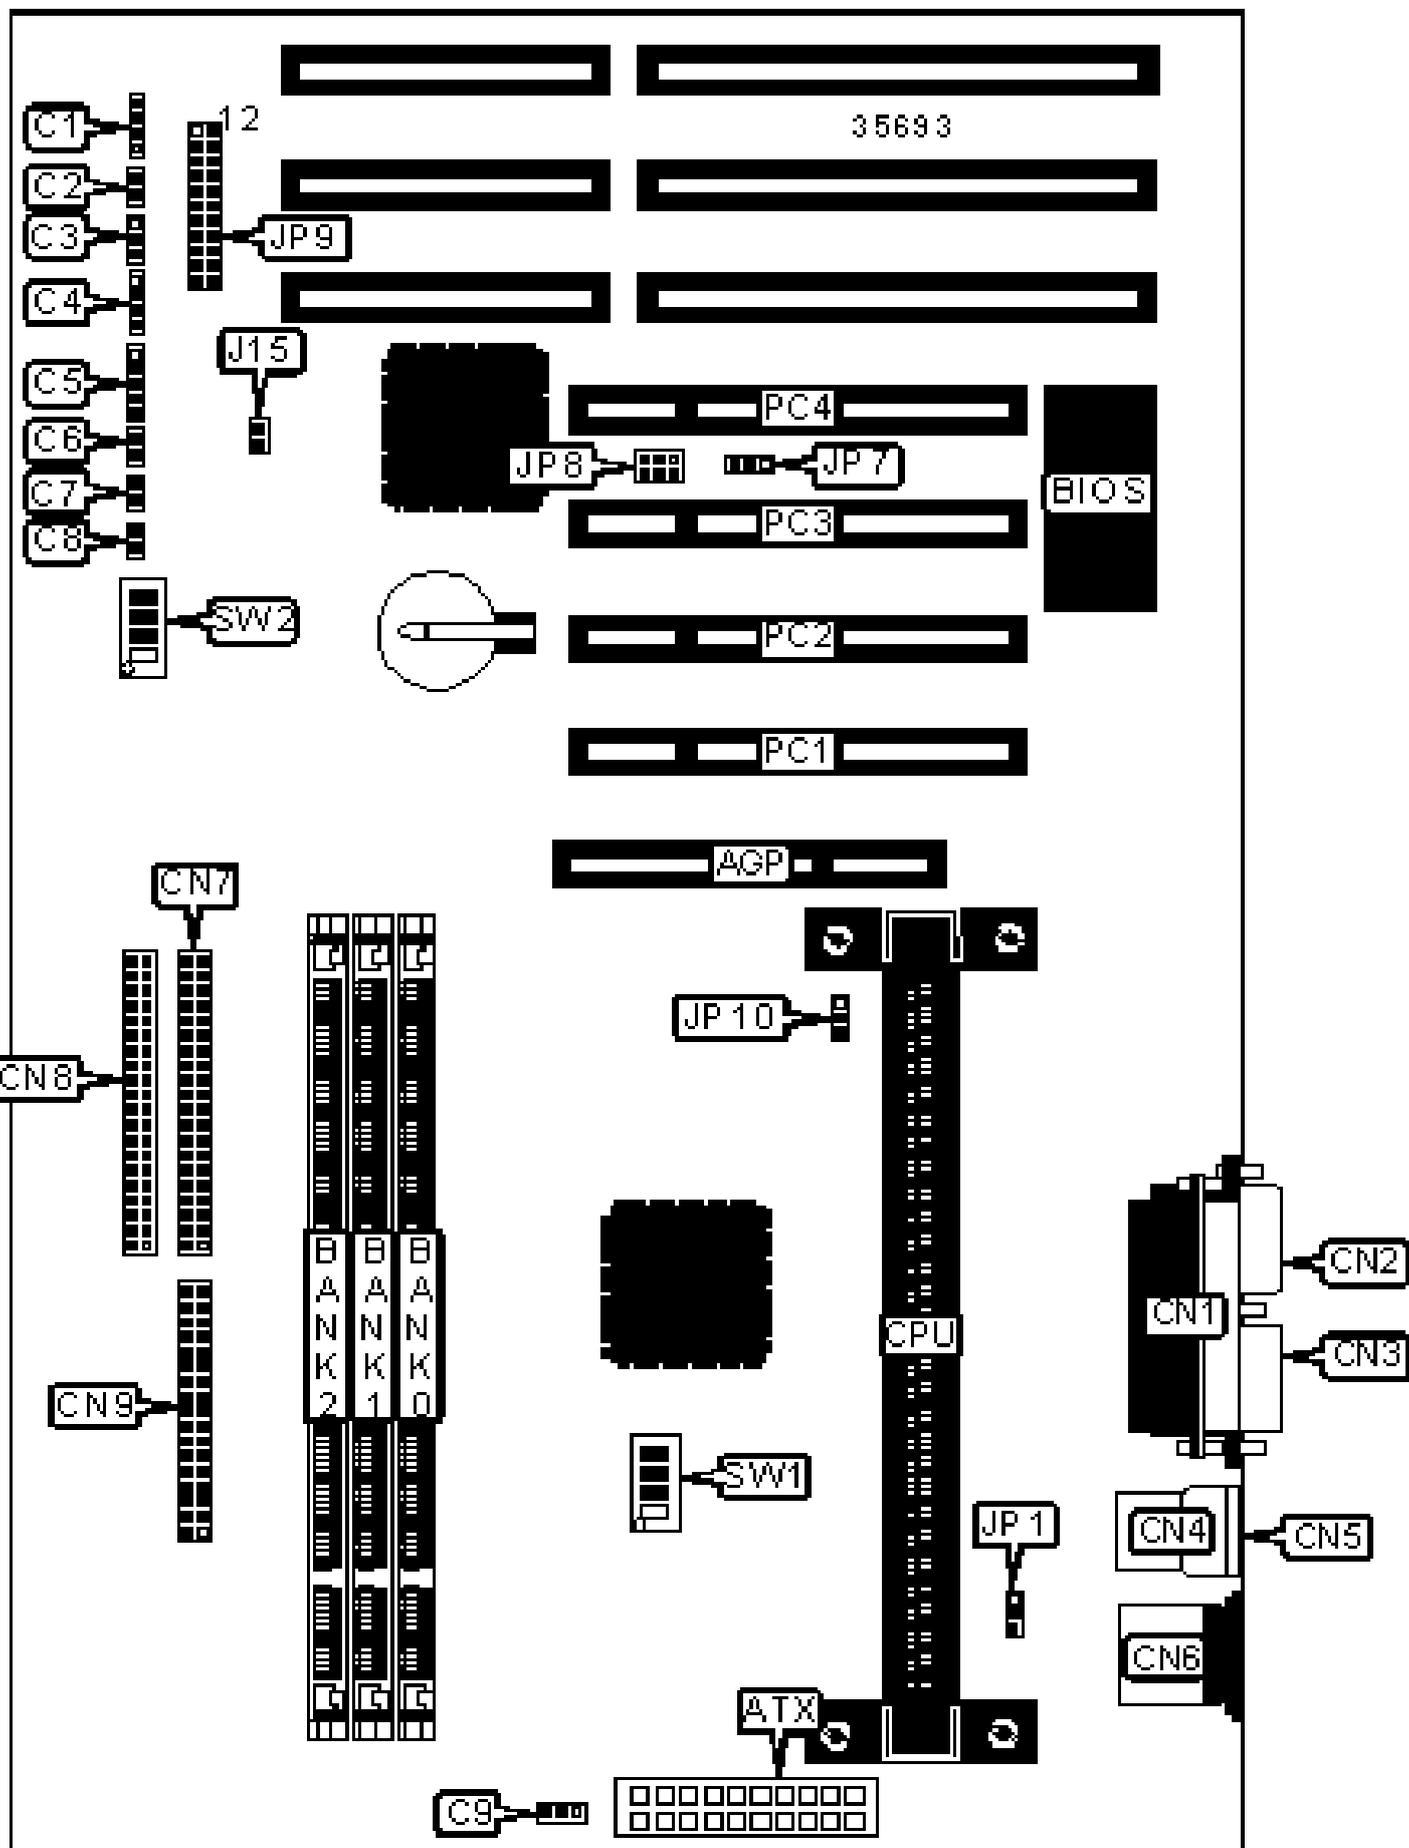

CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	USB connector 2	CN5
ATX power connector	ATX	PS/2 mouse port	CN6
Speaker	C1	IDE interface 2	CN7
Reset switch	C2	IDE interface 1	CN8
Power LED	C3	Floppy drive interface	CN9
IDE interface LED	C4	Wake on LAN connector	JP7
IR connector	C5	SB-link connector	JP8
Green PC connector	C6	Green PC LED	JP9/pins 1 & 12
Soft off power supply	C7	Reset switch	JP9/pins 3 & 4
Green PC LED	C8	Speaker	JP9/pins 5 - 8
CPU fan power	C9	IDE interface LED	JP9/pins 9 & 20
Parallel port	CN1	Green PC connector	JP9/pins 11 & 22
Serial port 1	CN2	Soft off power supply	JP9/pins 15 & 16
Serial port 2	CN3	Power LED	JP9/pins 17 - 19
USB connector 1	CN4	32-bit PCI slots	PC1 – PC4

USER CONFIGURABLE SETTINGS

Function	Label	Position
ATX power control select soft off	J15	Open
ATX power control select soft off/full on	J15	Closed
Keyboard power on enabled	JP1	Pins 1 & 2 closed
Keyboard power on disabled	JP1	Pins 2 & 3 closed

DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None
16MB	(1) 2M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
24MB	(1) 2M x 64	(1) 1M x 64	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None	None
32MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 2M x 64	(1) 2M x 64	None

DIMM CONFIGURATION (CON'T)

Size	Bank 0	Bank 1	Bank 2
40MB	(1) 4M x 64	(1) 1M x 64	None
40MB	(1) 2M x 64	(1) 2M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 2M x 64	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
56MB	(1) 4M x 64	(1) 2M x 64	(1) 1M x 64
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 4M x 64	(1) 4M x 64	None
72MB	(1) 8M x 64	(1) 1M x 64	None
72MB	(1) 4M x 64	(1) 4M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64	None
80MB	(1) 4M x 64	(1) 4M x 64	(1) 2M x 64

88MB	(1) 8M x 64	(1) 2M x 64	(1) 1M x 64
96MB	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
96MB	(1) 8M x 64	(1) 4M x 64	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
104MB	(1) 8M x 64	(1) 4M x 64	(1) 1M x 64
112MB	(1) 8M x 64	(1) 4M x 64	(1) 2M x 64
128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None
136MB	(1) 16M x 64	(1) 1M x 64	None
136MB	(1) 8M x 64	(1) 8M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 2M x 64	None
144MB	(1) 8M x 64	(1) 8M x 64	(1) 2M x 64
152MB	(1) 16M x 64	(1) 2M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
160MB	(1) 16M x 64	(1) 4M x 64	None
160MB	(1) 8M x 64	(1) 8M x 64	(1) 4M x 64
168MB	(1) 16M x 64	(1) 4M x 64	(1) 1M x 64
176MB	(1) 16M x 64	(1) 4M x 64	(1) 2M x 64

DIMM CONFIGURATION (CON'T)

Size	Bank 0	Bank 1	Bank 2
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None
224MB	(1) 16M x 64	(1) 8M x 64	(1) 4M x 64

256MB	(1) 32M x 64	None	None
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
264MB	(1) 32M x 64	(1) 1M x 64	None
272MB	(1) 32M x 64	(1) 1M x 64	(1) 1M x 64
272MB	(1) 32M x 64	(1) 2M x 64	None
288MB	(1) 32M x 64	(1) 2M x 64	(1) 2M x 64
288MB	(1) 32M x 64	(1) 4M x 64	None
320MB	(1) 32M x 64	(1) 4M x 64	(1) 4M x 64
320MB	(1) 32M x 64	(1) 8M x 64	None
384MB	(1) 32M x 64	(1) 8M x 64	(1) 8M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
512MB	(1) 32M x 64	(1) 16M x 64	(1) 16M x 64
512MB	(1) 32M x 64	(1) 32M x 64	None
768MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64
Note: Board accepts SDRAM memory.			

CACHE CONFIGURATION

Note: 256KB/512KB cache is located on the Pentium II CPU.

CPU SPEED SELECTION

CPU speed	Clock speed	Multiplier	SW1/1	SW1/2	SW1/3	SW1/4
233MHz	66MHz	3.5x	On	Off	Off	On
266MHz	66MHz	4x	On	Off	Off	On
300MHz	66MHz	4.5x	On	Off	Off	On
333MHz	66MHz	5x	On	Off	Off	On

366MHz	66MHz	5.5x	On	Off	Off	On
300MHz	100MHz	3x	Off	Off	Off	Off
350MHz	100MHz	3.5x	Off	Off	Off	Off
400MHz	100MHz	4x	Off	Off	Off	Off
450MHz	100MHz	4.5x	Off	Off	Off	Off
500MHz	100MHz	5x	Off	Off	Off	Off
550MHz	100MHz	5.5x	Off	Off	Off	Off

CPU SPEED SELECTION (CON'T)						
CPU speed	Clock speed	Multiplier	SW2/1	SW2/2	SW2/3	SW2/4
233MHz	66MHz	3.5x	Off	Off	On	On
266MHz	66MHz	4x	On	On	Off	On
300MHz	66MHz	4.5x	Off	On	Off	On
333MHz	66MHz	5x	On	Off	Off	On
366MHz	66MHz	5.5x	Off	Off	Off	On
300MHz	100MHz	3x	On	Off	On	On
350MHz	100MHz	3.5x	Off	Off	On	On
400MHz	100MHz	4x	On	On	Off	On
450MHz	100MHz	4.5x	Off	On	Off	On
500MHz	100MHz	5x	On	Off	Off	On
550MHz	100MHz	5.5x	Off	Off	Off	On

MAINBOARD BUS SPEED SELECTION	
Speed	JP10
100MHz turbo & other frequencies	Pins 1 & 2 closed
100MHz	Pins 2 & 3 closed

