


Configuration

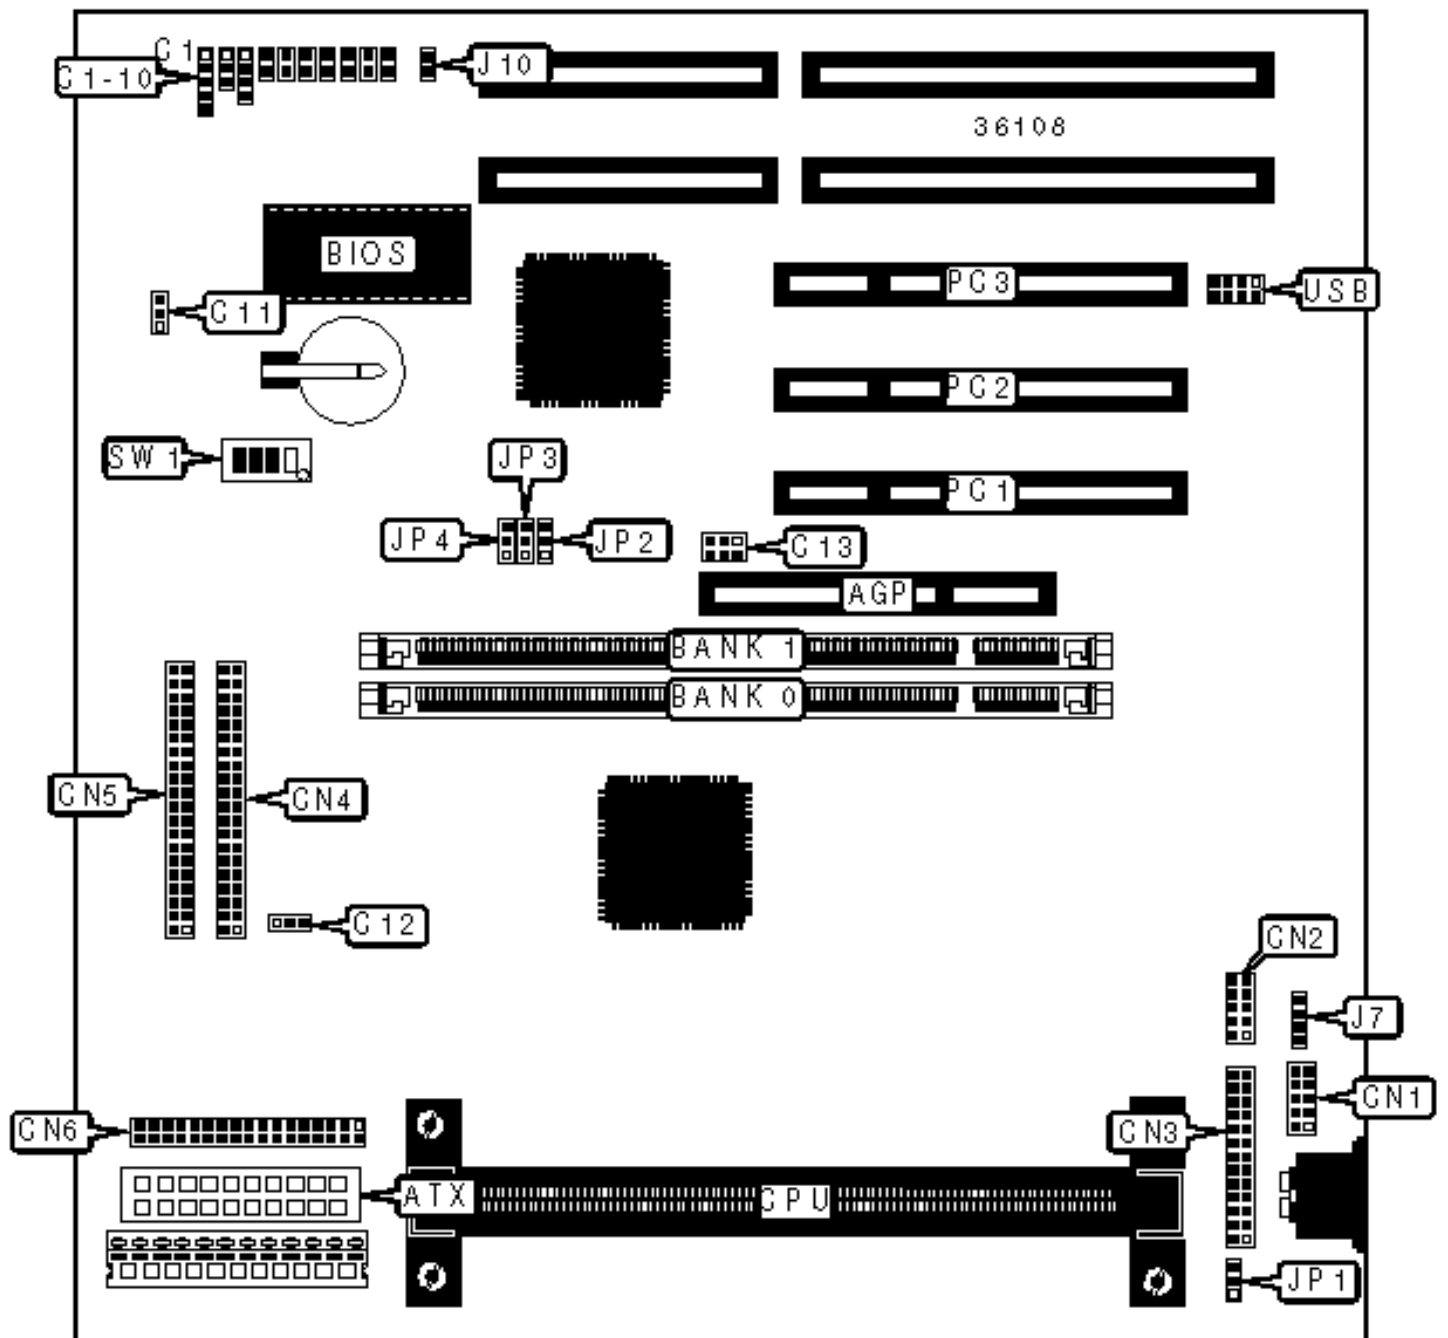

CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	Wake on LAN connector	C11
ATX power connector	ATX	Chassis fan power	C12
IR connector	C1	SB-link connector	C13
Power LED	C2	Serial port 2	CN1
Speaker	C3	Serial port 1	CN2
Turbo LED	C4	Parallel port	CN3
Turbo switch	C5	IDE interface 2	CN4
Reset switch	C6	IDE interface 1	CN5
Green PC LED	C7	Floppy drive interface	CN6
Green PC connector	C8	PS/2 mouse interface	J7
IDE interface LED	C9	32-bit PCI slots	PC1 - PC3
Soft off power supply	C10	USB connector	USB

USER CONFIGURABLE SETTINGS

Function		Label	Position
	ATX power supply select soft off	J10	Open
	ATX power supply select full on	J10	Closed
	Keyboard power on disabled	JP1	Pins 2 & 3 closed
	Keyboard power on enabled	JP1	Pins 1 & 2 closed

DIMM CONFIGURATION

Size	Bank 0	Bank 1
8MB	(1) 1M x 64	None
16MB	(1) 2M x 64	None

16MB	(1) 1M x 64	(1) 1M x 64
24MB	(1) 2M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None
32MB	(1) 2M x 64	(1) 2M x 64
40MB	(1) 4M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 2M x 64
64MB	(1) 8M x 64	None
64MB	(1) 4M x 64	(1) 4M x 64
72MB	(1) 8M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64
96MB	(1) 8M x 64	(1) 4M x 64
128MB	(1) 16M x 64	None
128MB	(1) 8M x 64	(1) 8M x 64
136MB	(1) 16M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 2M x 64

DIMM CONFIGURATION (CON'T)		
Size	Bank 0	Bank 1
160MB	(1) 16M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64
256MB	(1) 16M x 64	(1) 16M x 64
Note: Board accepts EDO memory.		

CACHE CONFIGURATION
Note: 256KB/512KB cache is located on the Pentium II CPU.

CPU SPEED SELECTION					
CPU speed	Clock speed	Multiplier	JP2	JP3	JP4
233MHz	66MHz	3.5x	1 & 2	1 & 2	1 & 2
266MHz	66MHz	4x	1 & 2	1 & 2	1 & 2
300MHz	66MHz	4.5x	1 & 2	1 & 2	1 & 2
333MHz	66MHz	5x	1 & 2	1 & 2	1 & 2
366MHz	66MHz	5.5x	1 & 2	1 & 2	1 & 2
Note: Pins designated should be in the closed position.					

CPU SPEED SELECTION (CON'T)						
CPU speed	Clock speed	Multiplier	SW1/1	SW1/2	SW1/3	SW1/4
233MHz	66MHz	3.5x	Off	Off	On	On
266MHz	66MHz	4x	On	On	Off	On
300MHz	66MHz	4.5x	Off	On	Off	On
333MHz	66MHz	5x	On	Off	Off	On
366MHz	66MHz	5.5x	Off	Off	Off	On