


Model: AM-909

**VIA® Apollo Pro133 Chipset BabyAT
Motherboard**

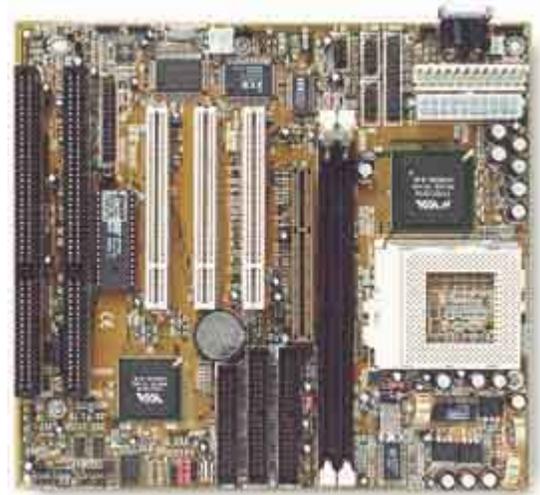

[BIOS_Upgrade](#)

Technical Specifications

Processor

- Intel® Pentium® III & Celeron® (66/100/133Mhz Front Side Bus).
- 233/266/300/333/350/366/400/400/433/450/466/500MHz or above.

Chip Set

- VIA® Apollo PRO133 (596B + 693A).

BIOS

- 2M Flash EPROM (Support PnP, APM, ACPI, ATAPI, DMI).
- IDE AUTO LBA Mode Supports HDDs over 8.4GB.
- Anti-Virus Protection.
- Trend Micro ChipAway Virus Protection.

Cache

- L2 Cache is CPU Built-in.

Memory

- Size up to 512MB.
- Two 168-pins DIMMs.
- Synchronous DRAM (SDRAM).

On Board I/O

- Support Two PCI Enhanced IDEs PIO Mode 3, Mode 4 and Ultra DMA 33 Channels (Optional Ultra DMA 66 & Ultra DMA 66 Cable).
- Twin Headers for Four IDE Devices Including IDE HDDs and CDROMs.
- Support Two FDDs of 360KB, 720KB, 1.2MB, 1.44MB or 2.88MB.
- One ECP/EPP Parallel Port. Two 16550A UART Serial Ports.
- Two USB Ports (Optional Adapter Cable).
- PS/2 Mouse Port (Optional Adapter Cable). Keyboard Port.
- IrDA Port (Optional TX/RX Module).

On Board Sound (optional)

- Creative ES1373 PCI Sound Chip.

- PnP, Creative 3D Enhancement, Wave Synth Wave Table.
 - Full-Duplex, Sound Blaster 16 Compatible.
- Line-in, Line-out, Mic-in and MIDI/Game Port (via Cable).

Expansion Slots

- Two ISA Bus Slots (One PCI Shared Slot).
- Three PCI Bus Slots (One ISA Shared Slot).
- One Accelerated Graphics Port (AGP).

Plug and Play

- Plug and Play Specification 1.1.
- Plug and Play for DOS®, Windows® 3.x, and Windows® 95.

PC97/98

- PC97/98 Ready.

Power Management

- Support SMM, APM and ACPI.
- Comply to Energy Star “Green PC” Program.
- Supports Modem Ring-in Wake Up.

PCI

- PCI 2.1.

AGP

- AGP 1.0.

VRM

- On Board VRM 8.2.

Battery

- On-board Lithium Battery.

Others

- CPU Frequency Multiplier Jumperless (Optional).
- Alarm Wake-up.

Board Size

- 200mm x 220mm, Baby AT Form Factor.

All brand names and registered trademarks mentioned are property of their owners
