

Anaheim-3 지원 가능 CPU (Auto setting)


소켓	Intel Socket-370 (370pin PPGA Socket)
	Cyrix Socket-370 (370pin PPGA Socket)
지원 가능 프로세서	Intel Celeron 300/ 333/ 366/ 400/ 433/ 466/ 500MHz processor 66MHz Host clock
	Intel 100MHz Host clock
	Intel 133MHz Host clock
	Cyrix 66/100MHz Host clock

Anaheim-3 점퍼 설정

Dip S/W 설정

DIP Switch	기능	1-2(Default)	2-3
J4	FDD write protect	Enable write/save Enable to Write data	Disable to write data to Floppy disk
J5	패스워드	Enable to edit CMOS	Disable to edit CMOS contents
J7	CMOS 설정가능 유무	Enable	disable
J9	CMOS Clear	disable	Enable
J1	PCI Audio	Enable	disable
J2	Cyrix Joshua	VID=High	VID=Low
J10	Audio Function(AMR) Primary Down	Enable	disable

Anaheim-3 Main Board

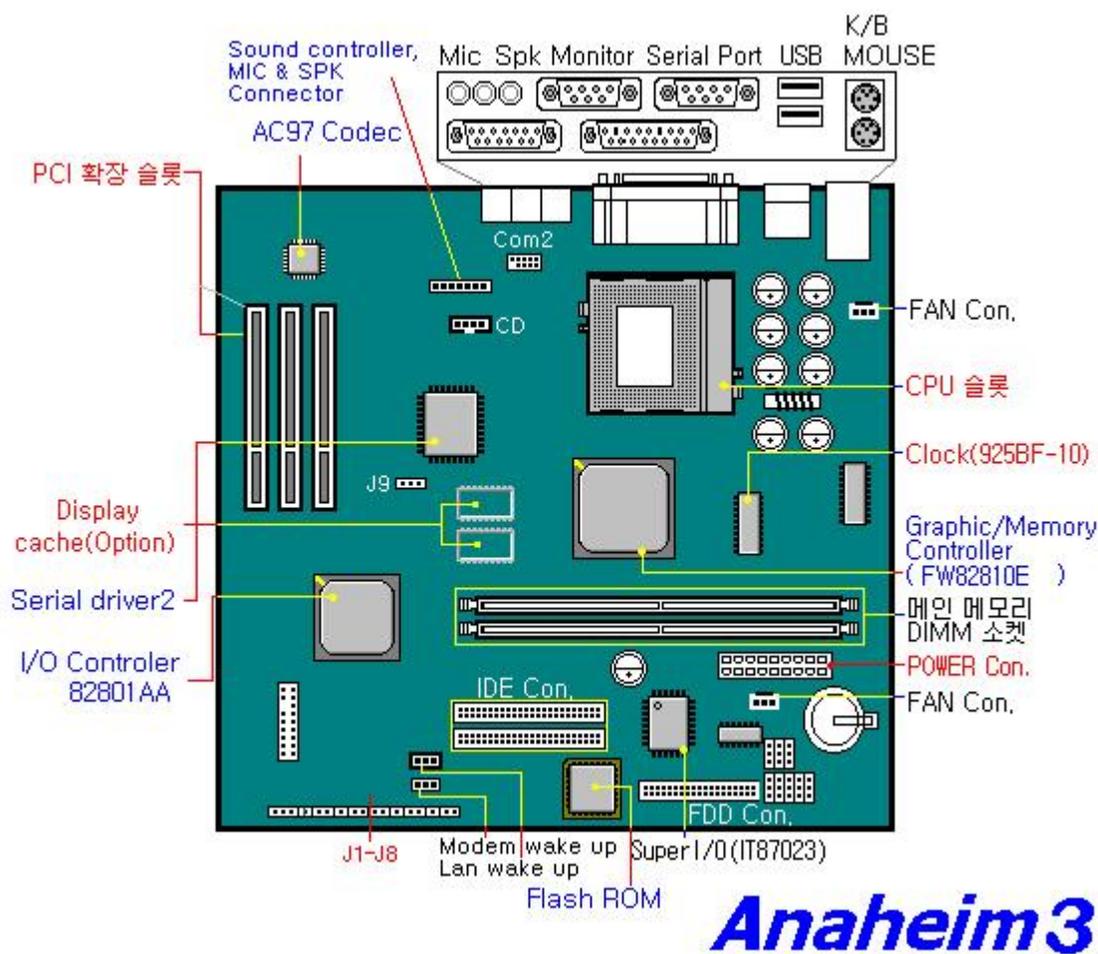

Anaheim-3 마더 보드 특징

Main ChipSet	Graphics and Memory Controller Hub(GMCH) : Intel FW82810e(4MB Display Cache Memory)
I/O Controller Hub(ICH) :	Intel FW82801AA
PCI Audio	Cirrus CS4280
Audio Codec	Cirrus CS4297A-JQ
Super I/O	ITE IT8702F-A
DC-DC Converter	HARRIS HIP6021CB
Clock	ICS 9250BF-10 (66/100MHz host clock, 100Mhz SDRAM Clock support)
확장 슬롯	PCI 슬롯 3개
Board Size	238mm * 238mm * 1.6t(4 Layer)

[이전으로]