


A780L3G Motherboard

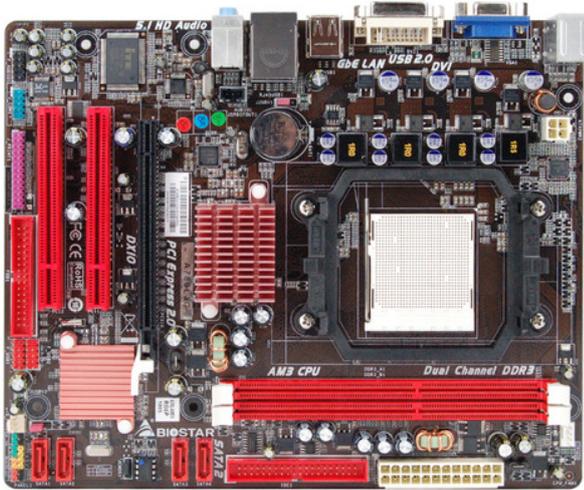

- Socket AM3
- Supports AMD Phenom II/Athlon II/Sempron Processors
- Supports AMD Cool'n'Quiet Technology
- AMD OverDrive™ with ACC feature (Advanced Clock Calibration) supported
- Supports BIO-Remote 2 Technology
- Supports Charger Booster Technology

A780L3G Specification

CPU SUPPORT	AMD Phenom™ II X6 Processor AMD Phenom™ II X4 Processor AMD Phenom™ II X3 Processor AMD Phenom™ II X2 Processor AMD Athlon™ II X4 Processor AMD Athlon™ II X3 Processor AMD Athlon™ II X2 Processor AMD Sempron™ Processor Maximum CPU TDP (Thermal Design Power) : 125Watt
HT	Support HT 5.2G
MEMORY	Support Dual Channel DDR3 800/1066/1333 MHz 2 x DDR3 DIMM Memory Slot Max. Supports up to 8GB Memory
INTEGRATED VIDEO	ATI Radeon™ HD3000 Graphics, On Board Graphic Max. Memory Share Up to 512 MB Support ATI Hybrid Crossfire
STORAGE	4 x SATA II Connector 1 x IDE Connector Support SATA RAID: 0,1,10

LAN	Realtek RTL8111DL - 10/100/1000 Controller
AUDIO CODEC	Realtek ALC662 6-Channel HD Audio
USB	4 x USB 2.0 Port 2 x USB 2.0 Header
EXPANSION SLOT	1 x PCI-E 2.0 x16 Slot 2 x PCI Slot
REAR I/O	1 x PS/2 Mouse 1 x PS/2 Keyboard 4 x USB 2.0 Port 1 x DVI Connector 1 x VGA Port 1 x LAN Port 3 x Audio Jacks
INTERNAL I/O	2 x USB 2.0 Header 4 x SATA II Connector (3Gb/s) 1 x IDE Connector 1 x Floppy Connector 1 x Front Audio Header 1 x Front Panel Header 1 x S/PDIF-Out Header 1 x CPU Fan Connector 1 x System Fan Connector 1 x COM Port Header 1 x Printer Port Header
DIMENSION	Micro ATX Form Factor Dimension: 24.4cm X 20cm (W x L)
OS SUPPORT	Supports Windows XP / Vista / 7 / 8
ACCESSORIES	2 x SATA Cable 1 x I/O Shield 1 x Fully Setup Driver CD 1 x Quick Guide
FEATURES	Windows 8 Ready Supports BIO-unlockING Supports AOD ACC Supports Phenom II x6 Supports AM3 Supports Solid capacitor BIO-FLASHER

A780L3G OVERVIEW

*The specification and pictures are subject to change without notice and the package contents may differ by area or your motherboard version!

BIOSTAR