


P4SDP Motherboard

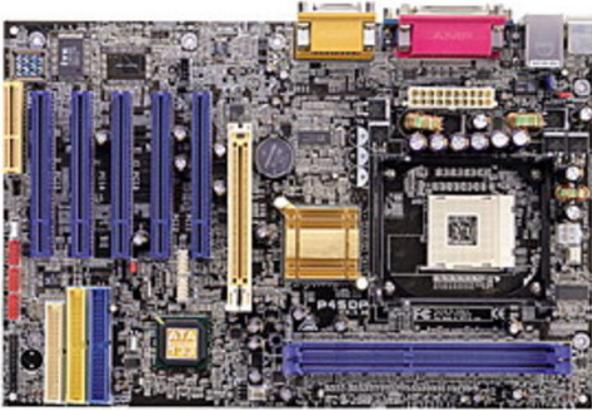

-
- Supports BIO-Remote 2 Technology
- Supports Charger Booster Technology

P4SDP Specification

FSB	Support FSB 533MHz
MEMORY	Support DDR 333 MHz 2 x DDR DIMM Memory Slot Max. Supports up to 2GB Memory
STORAGE	4 x IDE Connector
LAN	VIA VT6103 - 10/100 PHY
AUDIO CODEC	C-Media CMI9739A 6-Channel AC97 Audio
USB	2 x USB 2.0 Port 2 x USB 2.0 Header
EXPANSION SLOT	5 x PCI Slot 1 x CNR Slots 1 x AGP X Slot
REAR I/O	1 x PS/2 Mouse 1 x PS/2 Keyboard 1 x FireWire IEEE 1394a Port 2 x USB 2.0 Port 1 x COM Port 1 x Printer Port 1 x VGA Port 3 x Audio Jacks

INTERNAL I/O	2 x USB 2.0 Header 4 x IDE Connector 1 x Floppy Connector 1 x IrDA Header 1 x Front Audio Header
DIMENSION	ATX Form Factor Dimension: 20cm X 30.5cm (W x L)

P4SDP OVERVIEW

*The specification and pictures are subject to change without notice and the package contents may differ by area or your motherboard version!

BIOSTAMP