


BL600-DR

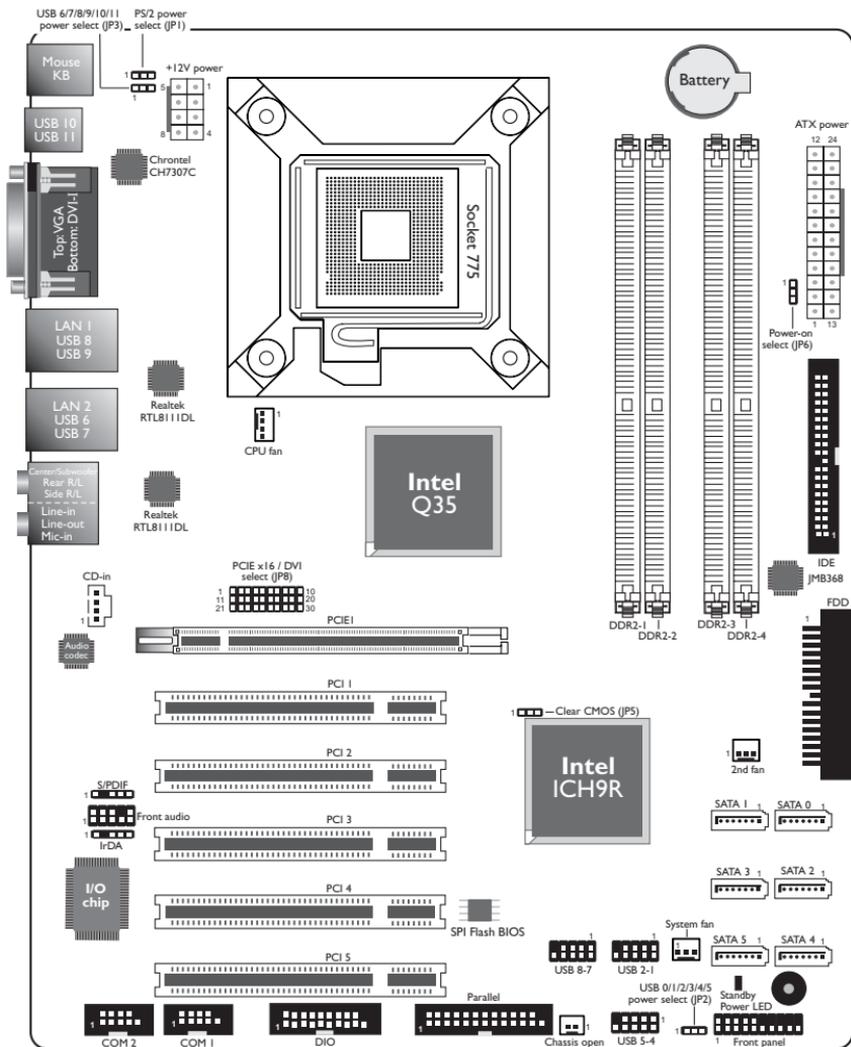

| Clear CMOS Data | JP5 |
|------------------|--------|
| Normal (default) | 1-2 On |
| Clear CMOS Data | 2-3 On |

| Power-on Select | JP6 |
|---------------------------|--------|
| Power-on via AC power | 2-3 On |
| Power-on via power button | 1-2 On |

| PS/2 Power | JP1 |
|--------------|--------|
| 5V (default) | 1-2 On |
| 5V_standby | 2-3 On |

| USB Power: 6/7/8/9/10/11 (JP3), 0/1/2/3/4/5 (JP2) | |
|---|--------|
| 5V (default) | 1-2 On |
| 5V_standby | 2-3 On |

| PCIE x16 / DVI Select | JP8 |
|-----------------------|-----------------|
| PCIE x16 | 11-20, 21-30 On |
| DVI (default) | 1-10, 11-20 On |