


K7TA-M

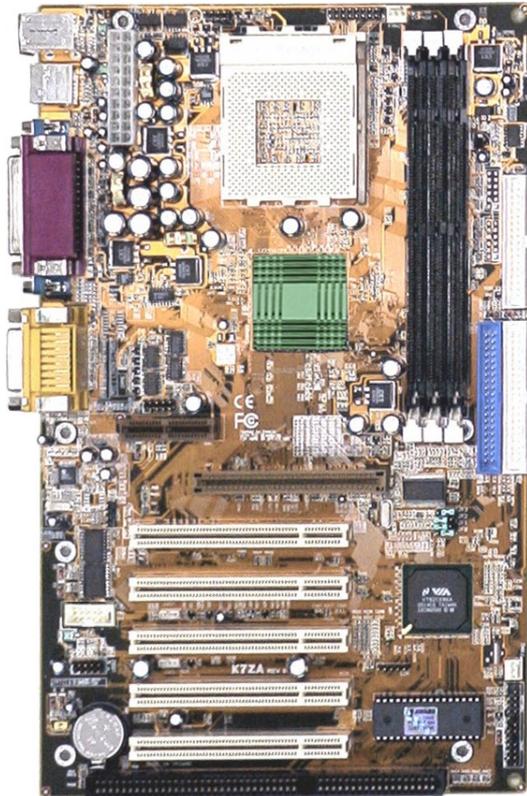

Features

- Support Socket A for AMD Duron and Thunderbird processor
- Support 100MHz FSB with double data rate (200MHz)
- Wake up on LAN
- Support Ultra DMA 33, 66
- Support 133MHz DIMM frequency
- Modem AMR port ready
- Support AGP slot (1x/2x/4x)
- VGA on chip and AC97 Audio Codec On Board
- On board PWM Switching power support for CPU core Voltage
- Support Desktop Management Interface (DMI) through BIOS
- Supports Advanced Configuration Power Interface (ACPI) & APM
- BIOS Green feature function, and "Plug &

DCS Multimedia World -

Head Office:

DCS Computer Systems Co., Ltd.

9F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih, Taipei Hsien 221, Taiwan R.O.C.

Tel: 886-2-2696-4875 Ext. 1351 ~ 1356

Fax: 886-2-2696-4878

<http://www.dcscomputer.com.tw/>

Sales Dept. E-mail: mminfo@sertek.com.tw

Technical Dept. E-mail: mmserv@sertek.com.tw

Play" Flash ROM

Specifications

CPU	AMD-K7 (Duron and Thunderbird) processor at a 100MHz FSB with double data rate (200MHz)
M.B. Chipset	VIA KM133 (VT8365) & VT82C686A
Architecture	AGP * 1, ISA * 1, PCI * 5, AMR * 1
Max. Memory	168-pin DIMM * 3 Up to 1.5GB SDRAM

IDE

- Dual channel PIO and PCI Bus Master IDE ports support up to 4 E-IDE devices for HDD or CD-ROM
- Supports PIO Mode 4 with data transfer rate up to 14MB/Sec
- Supports Ultra DMA 33, 66 with data transfer rate up to 66MB/Sec

BIOS

- Award BIOS with built-in Anti-Virus, APM, DMI and ACPI support, green function (PnP BIOS) and NCR SCSI BIOS (optional)
- Supports CD-ROM, SCSI, and LS120/ZIP boot up
- H/w monitor (optional)

I/O Devices

- 1 FDD control port supports two of the 5.25" or 3.5" floppy drives up to 2.88MB
- 2 Serial ports (16550 UARTs)
- 1 Parallel port (EPP/ECP)
- 1 PS2 Mouse port
- 1 PS/2 keyboard connector

USB Ports

- 4 USB ports support up to 127 peripheral devices
- Supports 12Mb/s (high speed) & 1.5Mb (low speed) transfer rate

IR Port

- 1 HPSIR/ASKIR compatible IrDA interface port (Cable optional)

Sound Multimedia Port

- 1 Game port
- 1 Line in
- 1 Line out
- 1 Microphone in

Power Management

- Supports Modem remote Ring-On function

Authorized Distributors





Main Board

- Supports software power off function
 - Supports RTC Wake-Up
- Board Size**
- 305mm x 180mm ATX Form Factor

DCS Multimedia World -

Head Office:

DCS Computer Systems Co., Ltd.

9F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan R.O.C.

Tel: 886-2-2696-4875 Ext. 1351 ~ 1356

Fax: 886-2-2696-4878

<http://www.dcscomputer.com.tw/>

Sales Dept. E-mail: mminfo@sertek.com.tw

Technical Dept. E-mail: mmserv@sertek.com.tw

Authorized Distributors

