


S630MA

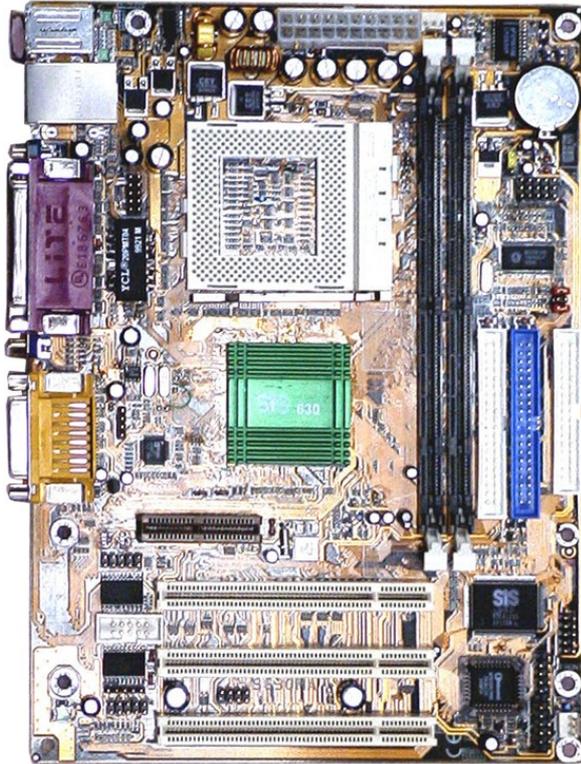

Features

- Support 66/100/133MHz FSB frequency
- Support DMA 66
- VGA on chip & AC97 Audio Codec On Board
- Modem AMR port ready
- Support 10/100M Lan on chip
- Modem Remote Ring On
- Support Desktop Management Interface (DMI) through BIOS
- Supports Advanced Configuration Power Interface (ACPI) & APM
- BIOS Green feature function, and "Plug & Play" Flash ROM

Specifications

CPU Socket 370 Processor
PIII Coppermine
Celeron

M.B. Chipset SiS630E chipset
Architecture PCI * 3, AMR * 1,
Max. Memory 168-pin DIMM * 2
Up to 1GB SDRAM

IDE

- Dual channel PIO and PCI Bus Master IDE ports support up to 4 E-IDE devices for HDD or CD-ROM
- Supports PIO Mode 4 with data transfer rate up to 14MB/Sec
- Supports Ultra DMA 33, 66 with data transfer rate up to 66MB/Sec

BIOS

- Award BIOS with built-in Anti-Virus, APM, DMI and ACPI support, green function (PnP BIOS) and NCR SCSI BIOS
- Supports CD-ROM, SCSI, and LS120/ZIP boot up
- H/w monitor

I/O Devices

- 1 FDD control port supports two of the 5.25" or 3.5" floppy drives up to 2.88MB
- 2 Serial ports (16550 UARTs)
- 1 Parallel port (EPP/ECP)
- 1 PS2 Mouse port
- 1 PS/2 keyboard connector

USB Ports

- 5 USB ports support up to 127 peripheral devices
- Supports 12Mb/s (high speed) & 1.5Mb (low speed) transfer rate

IR Port

- 1 HPSIR/ASKIR compatible IrDA interface port (Cable optional)

Sound Multimedia Port

- 1 Game port
- 1 Line in
- 1 Line out
- 1 Microphone in

Power Management

- Supports Modem remote Ring-On function
- Supports software power off function
- Supports RTC Wake-Up

Board Size

- 234mm x 170mm Micro-ATX Form Factor

DCS Multimedia World -

Head Office:

DCS Computer Systems Co., Ltd.

9F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih, Taipei Hsien 221, Taiwan R.O.C.

Tel: 886-2-2696-4875 Ext. 1351 ~ 1356

Fax: 886-2-2696-4878

<http://www.dcscomputer.com.tw/>

Sales Dept. E-mail: mminfo@sertek.com.tw

Technical Dept. E-mail: mmserv@sertek.com.tw

Authorized Distributors

