


EL331-RM

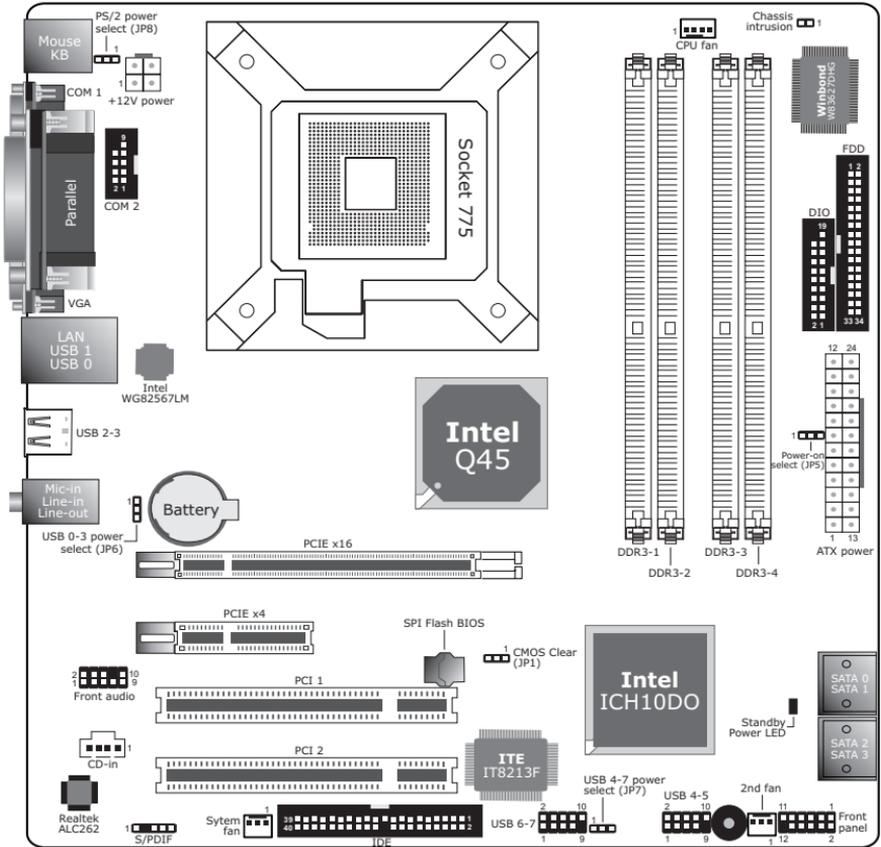

Power-on Select	JP5
Power-on via power button (default)	1-2 On
Power-on via AC power	2-3 On

Clear CMOS Data	JP1
Normal (default)	1-2 On
Clear CMOS Data	2-3 On

USB Power: 0-3 (JP6), 4-7 (JP7)	
5V (default)	1-2 On
5V_standby	2-3 On

PS/2 Power	JP8
5V (default)	1-2 On
5V_standby	2-3 On