


HAB208-8P7 Quick Manual

8 Slot ATX-supported PICMG1.3 Bus Half-Sized Backplane with PCIe16/4xPCI slot

■ 24-pin ATX Power Connector

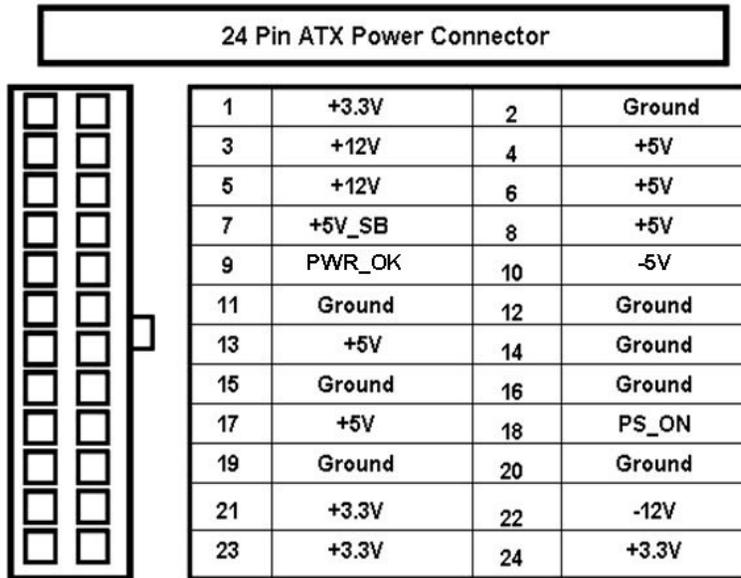

Notice:The onboard 24 pin power connector also back compatible with 20 pin power supply

©Copyright 2007 by AXIOM Technology Co., Ltd.
All rights reserved.
Sep 2007, Version A1
Printed in Taiwan

9419C208010E

Trademarks Acknowledgments

AXIOM is a trademark of AXIOM Technology Co., Ltd.


Other brand names and trademarks are the properties and registered brands of their respective owners.

Specifications are subject to change without notice.

HAB208-8P7 Quick Manual

8 Slot ATX-supported PICMG 1.3 Bus Half-Sized Backplane with PCIe16/6xPCI Slot

I. Board Dimensions

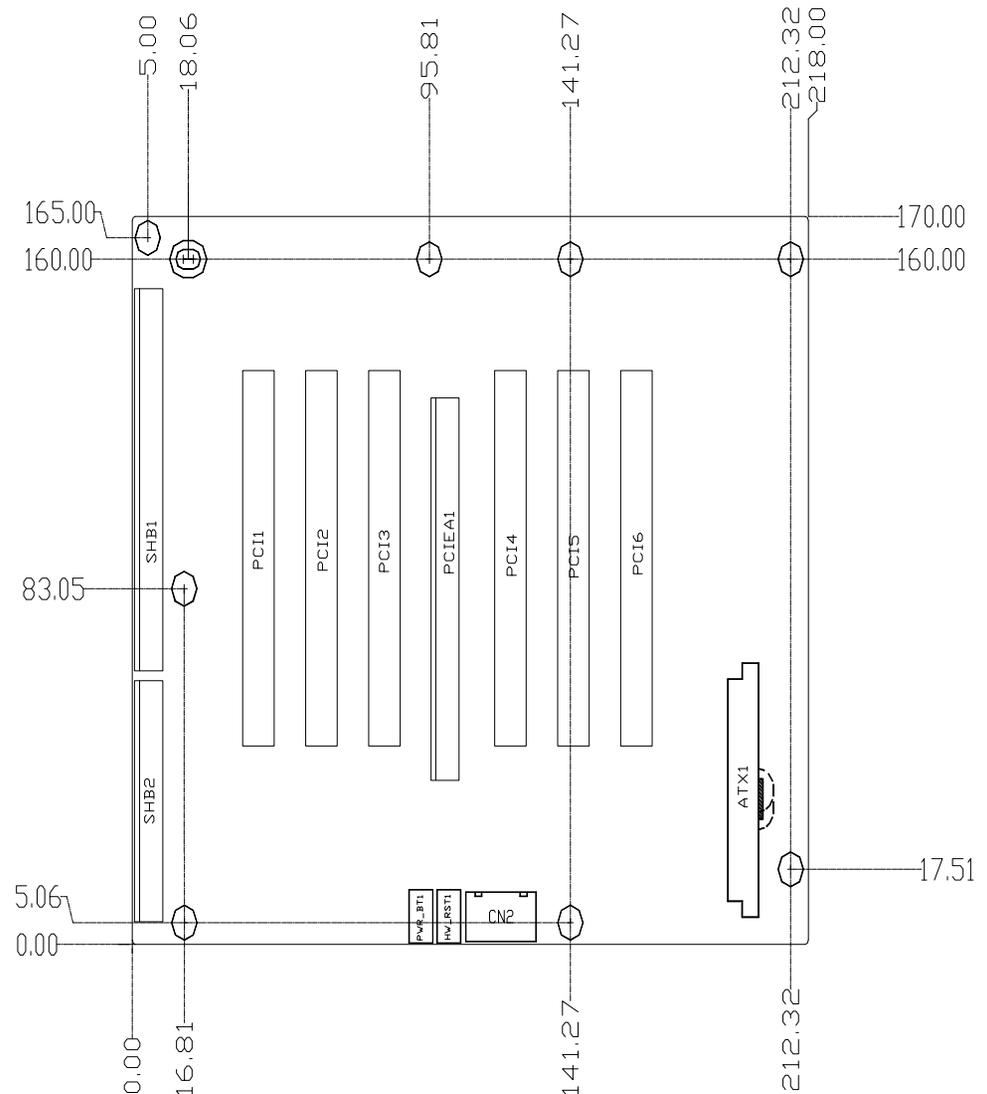


HAB208-8P7 Quick Manual

8 Slot ATX-supported PICMG1.3 Bus Half-Sized Backplane with PCIe16/4xPCI slot

II.Connector

Connector	Description
SHB 1~2	For PICMG 1.3 Half-Sized SBC
CN2	8 Pin Power Connector
PWR_BT1	Power Button
HW_RST1	Hardware Reset
ATX1	24 Pin ATX Power Connector
PCI1~6	PCI Slot
PCIEA1	PCIex16 Slot

■ 8 Pin Power Connector-CN2

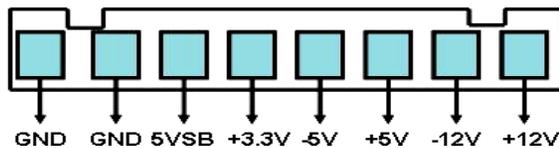


Notice:The 8 Pin Power connector could be used for Thermal Detected Board(For example.The AX8295A)

HAB208-8P7 Quick Manual

8 Slot ATX-supported PICMG 1.3 Bus Half-Sized Backplane with PCIe16/6xPCI Slot

■ PWR_BT1 Connector



■ HW_RST1 Connector

