

Half-size SBC

HSB-800I

HSB-800I

AMD LX800 Processor
ISA Half-size CPU Card
With DDR, Ethernet,
CompactFlash™ & PC/104

HSB-800I Manual Rev. A 2nd Ed.
Mar. 2008

Copyright Notice

This document is copyrighted, 2008. All rights are reserved. The original manufacturer reserves the right to make improvements to the products described in this manual at any time without notice.

No part of this manual may be reproduced, copied, translated, or transmitted in any form or by any means without the prior written permission of the original manufacturer. Information provided in this manual is intended to be accurate and reliable. However, the original manufacturer assumes no responsibility for its use, or for any infringements upon the rights of third parties that may result from its use.

The material in this document is for product information only and is subject to change without notice. While reasonable efforts have been made in the preparation of this document to assure its accuracy, we assume no liabilities resulting from errors or omissions in this document, or from the use of the information contained herein.

We reserve the right to make changes in the product design without notice to its users.

Acknowledgments

All other products' name or trademarks are properties of their respective owners.

- Award is a trademark of Award Software International, Inc.
- CompactFlash™ is a trademark of the Compact Flash Association.
- AMD, the AMD Arrow logo and combinations thereof are trademarks of Advanced Micro Devices, Inc.
- Microsoft Windows® is a registered trademark of Microsoft Corp.
- ITE is a trademark of Integrated Technology Express, Inc.
- IBM, PC/AT, PS/2, and VGA are trademarks of International Business Machines Corporation.
- SoundBlaster is a trademark of Creative Labs, Inc.

Packing List

Before you begin installing HSB-800I, please make sure that the following items have been shipped:

- 1701340704 Flat Cable
- 1701400453 ATA-100 Cable
- 1700060192 PS/2 Keyboard & Mouse Cable
- 1709140302 Cable
- 1701200301 Flat Cable
- 170910020A USB Cable
- 1703030501 Wire
- 1701010302 Flat Cable
- HSB-800I CPU Card
- Quick Installation Guide
- CD-ROM for manual (in PDF format) and drivers

If any of these items are missing or damaged, please contact your distributor or sales representative immediately.

Contents

Chapter 1 General Information

| | |
|-------------------------|-----|
| 1.1 Introduction..... | 1-2 |
| 1.2 Feature | 1-3 |
| 1.3 Specification | 1-4 |

Chapter 2 Quick Installation Guide

| | |
|---|------|
| 2.1 Safety Precaution | 2-2 |
| 2.2 Location of Connectors and Jumpers | 2-3 |
| 2.3 Mechanical Drawings | 2-4 |
| 2.4 List of Jumpers | 2-6 |
| 2.5 List of Connectors | 2-6 |
| 2.6 Setting Jumpers | 2-8 |
| 2.7 CFD Voltage 3.3V/5V Selection (JP1) | 2-9 |
| 2.8 Clear CMOS (JP2) | 2-9 |
| 2.9 AT/ATX Power Type Selection (JP3) | 2-9 |
| 2.10 LCD Clock and Power Selection (JP4) | 2-9 |
| 2.11 Inverter Voltage Selection (JP5) | 2-9 |
| 2.12 Front Panel Connector (FP1) | 2-10 |
| 2.13 Front Panel Connector (FP2) | 2-10 |
| 2.14 RS-232 Serial Port Connector (COM1, COM3, COM4) | 2-10 |
| 2.15 RS-232/422/485 Serial Port Connector (COM2)..... | 2-11 |
| 2.16 IrDA Connector (IR1)..... | 2-11 |

2.17 Digital I/O (CN1) 2-11

2.18 LPT Port Connector (LPT1) 2-12

2.19 USB Connector (USB1~3) 2-12

2.20 FAN Connector (CN2) 2-13

2.21 Audio Input/ Output/ CD-in/ MIC (CN3)..... 2-13

2.22 LCD Inverter (CN4) 2-13

2.23 TFT LCD (CN5) 2-14

2.24 +5VSB Power Connector (CN6) 2-16

2.25 AT Power_5V, 12V Connector (CN7) 2-16

2.26 LVDS 1, 2 (CN9, CN10) 2-16

2.27 PS2 Keyboard/ Mouse Connector (CN11)..... 2-17

2.28 Internal Keyboard Connector (CN12)..... 2-17

Chapter 3 Award BIOS Setup

3.1 System Test and Initialization. 3-2

3.2 Award BIOS Setup 3-3

Chapter 4 Driver Installation

4.1 Installation 4-3

Appendix A Programming The Watchdog Timer

A.1 ProgrammingA-2

A.2 ITE8712 Watchdog Timer Initial Program.....A-5

Appendix B I/O Information

B.1 I/O Address MapB-2

B.2 Memory Address Map.....B-3

B.3 IRQ Mapping Chart.....B-3
B.4 DMA Channel Assignments.....B-3

Chapter

1

**General
Information**

1.1 Introduction

We are release our economic half-size Single Board Computer (SBC) – HSB-800I, which is designed to target the industrial control and automation market. HSB-800I is based on AMD LX800 processor, which features the low power consumption and faster heat spreading to ensure the performance of the product.

HSB-800I supports onboard DDR400 system memory up to 128MB and the chipset of HSB-800I is AMDLX800 +CS5536. For the display function, the VGA controller is integrated to the AMD LX 800 processor that supports CRT and LCS simultaneous display. Moreover, 2D/3D graphics accelerator has been integrated to provide higher performance to graphic processing. The LCD interface is up to 24-bit and support LVDS/TTL LCD.

HSB-800I targets the common industrial applications include factory automation systems and production process control devices. If you are looking for a cost-effective and reliable solution for your essential application, HSB-800I definitely is your first choice. For more detailed product information and instruction, please read the manual before the installation.

1.2 Features

- AMD LX 800 Processor
- Onboard 128MB DDR 400 Memory
- Integrated 2D/3D Graphics Accelerator, VGA Support CRT/TFT
- 10/100/1000Base-TX Ethernet x 1 (10/100 & GbE Optional)
- USB2.0 x 4/ RS-232 x 3, RS-232/422/485 x 1/ Parallel x 1/ IrDA Port x 1
- Ultra ATA 33 x 1
- Digital I/O
- AC97
- PC/104
- CompactFlash Type II Socket
- Watchdog Function 1~255 Sec.

1.3 Specification

System

- Processor AMD LX800
- System Memory Onboard 128MB DDR 400 Memory
- Chipset AMD LX800 + CS5536
- Ethernet PCI 10/100Mbps or 10/100/1000Mbps LAN x 1 (optional), RJ-45 x 1, Realtek 8100C/8110S controller optional
- BIOS Award Plug & Play FWH BIOS – 8Mb ROM
- IDE Interface ATA-33 x 1 channel
- CompactFlash CompactFlash Type II connector
- Expansion Interface ISA, PC/104
- Battery Lithium battery
- Power Requirement AT 5V, 12V
- Operating Temperature 32°F~140°F (0°C~60°C)
- Board Size 7.3”(L)x 4.8”(W) (185mmx121mm)
- Gross Weight 0.71lb (0.3Kg)

Display: Supports CRT and LCD Simultaneous Display

- VGA Controller AMD LX800
- Memory Shared memory up to 16M
- Resolutions 1600x1200 @ 32bpp at 100MHz for CRT; 1600x1200 @ 24bpp for LCD
- LCD Interface Up to 24-bit, LVDS/TTL LCD support

I/O: CS5536

- Serial Port COM x 4 (Internal Pin Header x 4)
COM1, COM3, COM4: RS-232
COM2: RS-232/422/485
- Parallel Port Supports SPP/EPP/ECP mode
- Universal Serial Bus USB2.0 x 4
5x1 pin header x 3
Type A connector x 1
- Floppy Drive Interface Standard FDD port x 1, support up to one floppy device
- Keyboard & Mouse Mini-DIN PS/2 K/B and Mouse Connector x 1; Internal keyboard pin header x 1
- IrDA Supports one IrDA header
- Audio Realtek ALC203 AC97 Codec/
MIC-in/ Line-in/ Line-out/ CD-in

Chapter

2

Quick Installation Guide

Notice:

The Quick Installation Guide is derived from Chapter 2 of the user manual. For other chapters and further installation instructions, please refer to the user manual CD-ROM that came with the product.



2.1 Safety Precautions

Warning!


Always completely disconnect the power cord from your board whenever you are working on it. Do not make connections while the power is on, because a sudden rush of power can damage sensitive electronic components.

Caution!


Always ground yourself to remove any static charge before touching the board. Modern electronic devices are very sensitive to static electric charges. Use a grounding wrist strap at all times. Place all electronic components on a static-dissipative surface or in a static-shielded bag when they are not in the chassis

2.2 Location of Connectors and Jumpers


Component Side

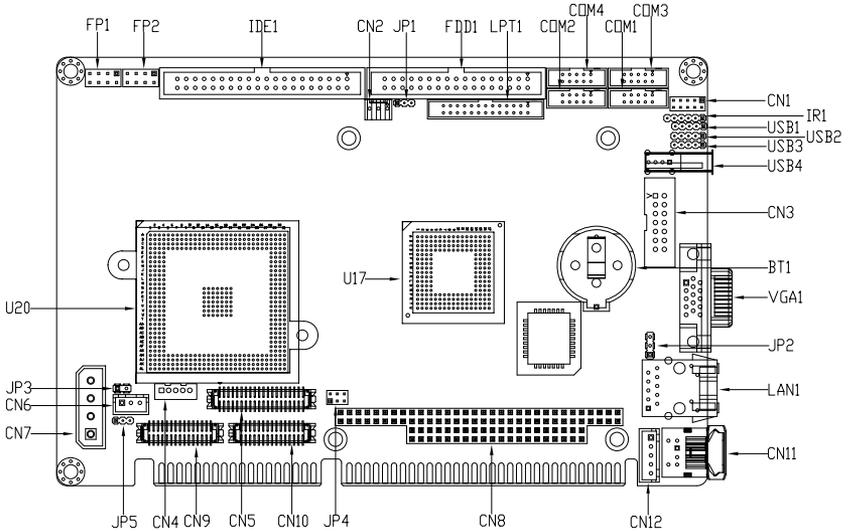

Solder Side

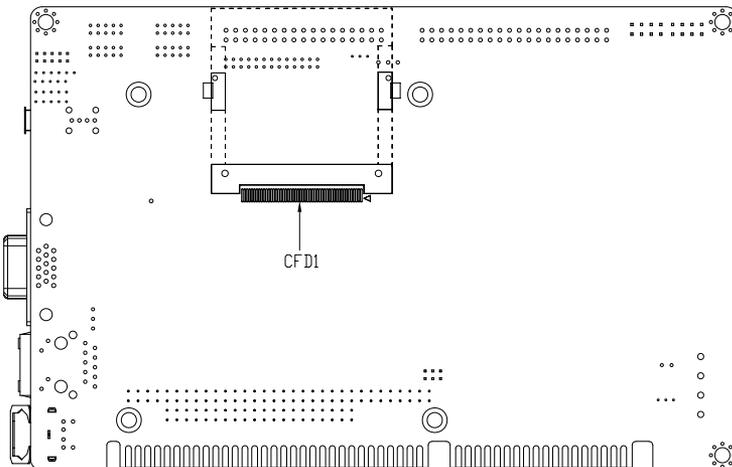

Solder Side

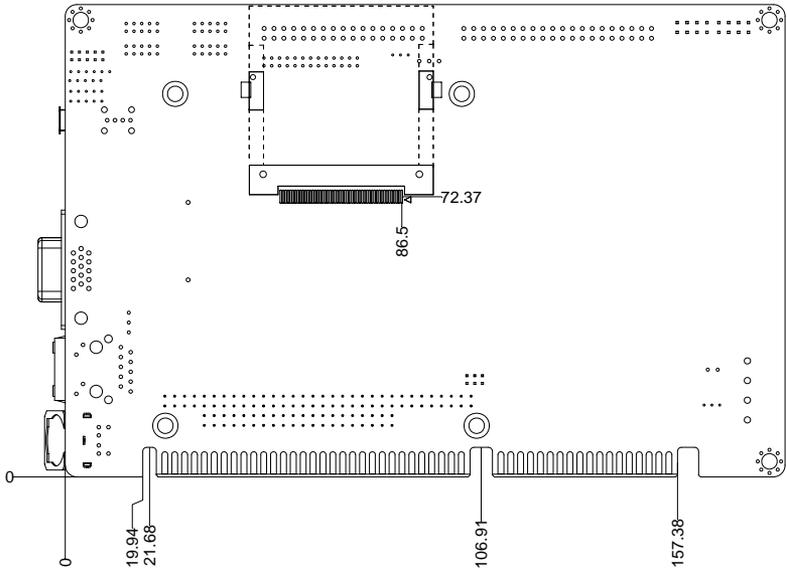

2.4 List of Jumpers

The board has a number of jumpers that allow you to configure your system to suit your application.

The table below shows the function of each of the board's jumpers:

| Label | Function |
|--------------|--------------------------------|
| JP1 | CFD Voltage 3.3V/ 5V Selection |
| JP2 | Clear CMOS |
| JP3 | AT/ATX Power Type Selection |
| JP4 | LCD Clock and Power Selection |
| JP5 | Inverter Voltage Selection |

2.5 List of Connectors

The board has a number of connectors that allow you to configure your system to suit your application. The table below shows the function of each board's connectors:


| Label | Function |
|--------------|--|
| FP1 | Front Panel Connector 1 |
| FP2 | Front Panel Connector 2 |
| VGA1 | VGA Display Connector |
| FDD1 | Floppy Connector |
| IDE1 | EIDE Connector (Support one IDE device only) |
| CFD1 | Compact Flash Slot (Always master) |
| COM1/3/4 | RS-232 Serial Port Connector |
| COM2 | RS-232/422/485 Serial Port Connector |

| | |
|--------|---|
| IR1 | IrDA Connector |
| LPT1 | LPT Port Connector |
| USB1~3 | USB Connector |
| USB4 | USB Connector |
| LAN1 | 10/100 or 100/1000 Base-TX Ethernet Connector |
| DIMM1 | DDRII SODIMM Slot |
| CN1 | Digital I/O |
| CN2 | Fan Connector |
| CN3 | Audio Input/Output/CDin/MIC |
| CN4 | LCD Inverter Power Connector |
| CN5 | TFT LCD Connector |
| CN6 | +5VSB Power Connector |
| CN7 | AT Power_5V,12V Connector |
| CN8 | PC/104 ISA Interface |
| CN9 | LVDS1 Connector |
| CN10 | LVDS2 Connector |
| CN11 | PS2 Keyboard/Mouse Connector |
| CN12 | Internal Keyboard Connector |

2.6 Setting Jumpers

You configure your card to match the needs of your application by setting jumpers. A jumper is the simplest kind of electric switch. It consists of two metal pins and a small metal clip (often protected by a plastic cover) that slides over the pins to connect them. To “close” a jumper you connect the pins with the clip.

To “open” a jumper you remove the clip. Sometimes a jumper will have three pins, labeled 1, 2 and 3. In this case you would connect either pins 1 and 2 or 2 and 3.

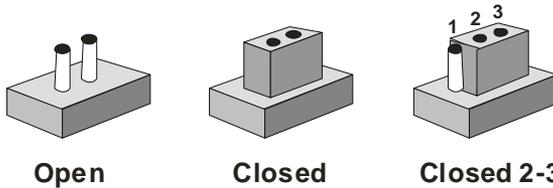

A pair of needle-nose pliers may be helpful when working with jumpers.

If you have any doubts about the best hardware configuration for your application, contact your local distributor or sales representative before you make any change.

Generally, you simply need a standard cable to make most connections.

2.7 CFD Voltage 3.3V/5V Selection (JP1)

| JP1 | Function |
|-----|----------------|
| 1-2 | 3.3V (default) |
| 2-3 | 5V |

2.8 Clear CMOS (JP2)

| JP2 | Function |
|-----|------------------|
| 1-2 | Normal (default) |
| 2-3 | Clear CMOS |

2.9 AT/ATX Power Type Selection (JP3)

| JP3 | Function |
|------|----------------------------|
| 1-2 | ATX Power Supply (default) |
| Open | AT Power Supply |

Note: Only AT Function w/o Backplanes.

2.10 LCD Clock and Power Selection (JP4)

| JP4 | Function |
|-----|------------------|
| 1-3 | Normal (default) |
| 3-5 | Inverse |
| 2-4 | +5Vlcd |
| 4-6 | +3Vlcd (default) |

2.11 Inverter Voltage Selection (JP5)

| JP5 | Function |
|-----|---------------|
| 1-2 | +12V |
| 2-3 | +5V (default) |

2.12 Front Panel Connector (FP1)

| Pin | Signal | Pin | Signal |
|-----|---------------------|-----|------------------|
| 1 | Power On Button (+) | 2 | Reset Switch (+) |
| 3 | Power On Button (-) | 4 | Reset Switch (-) |
| 5 | IDE LED (+) | 6 | Power LED (+) |
| 7 | IDE LED (-) | 8 | Power LED (-) |

2.13 Front Panel Connector (FP2)

Note: Internal Buzzer enable: Close Pin 5,7

| Pin | Signal | Pin | Signal |
|-----|----------------------|-----|--------------------|
| 1 | External Speaker (+) | 2 | Key Board Lock (+) |
| 3 | NC | 4 | GND |
| 5 | Internal Buzzer (-) | 6 | I2C Bus SMB Clock |
| 7 | External Speaker (-) | 8 | I2C Bus SMB Data |

2.14 RS-232 Serial Port Connector (COM1, COM3, COM4)

| Pin | Signal | Pin | Signal |
|-----|--------|-----|--------|
| 1 | DCD | 2 | RXD |
| 3 | TXD | 4 | DTR |
| 5 | GND | 6 | DSR |
| 7 | RTS | 8 | CTS |
| 9 | RI | 10 | NC |

2.15 RS-232/422/485 Serial Port Connector (COM2)

| Pin | Signal | Pin | Signal |
|-----|------------------------|-----|---------------|
| 1 | DCD (422TXD-/485DATA-) | 2 | RXD (422RXD+) |
| 3 | TXD (422TXD+/485DATA+) | 4 | DTR (422RXD-) |
| 5 | GND | 6 | DSR |
| 7 | RTS | 8 | CTS |
| 9 | RI | 10 | NC |

2.16 IrDA Connector (IR1)

| Pin | Signal |
|-----|--------|
| 1 | +5V |
| 2 | NC |
| 3 | IRRX |
| 4 | GND |
| 5 | IRTX |
| 6 | NC |

2.17 Digital I/O (CN1)

| Pin | Signal | Pin | Signal |
|-----|--------|-----|--------|
| 1 | IN0 | 2 | IN1 |
| 3 | IN2 | 4 | IN3 |
| 5 | OUT0 | 6 | OUT1 |
| 7 | OUT2 | 8 | OUT3 |
| 9 | +5V | 10 | GND |

2.18 LPT Port Connector (LPT1)

| Pin | Signal | Pin | Signal |
|-----|---------|-----|--------|
| 1 | #STROBE | 2 | #AFD |
| 3 | DATA0 | 4 | #ERROR |
| 5 | DATA1 | 6 | #INIT |
| 7 | DATA2 | 8 | #SLIN |
| 9 | DATA3 | 10 | GND |
| 11 | DATA4 | 12 | GND |
| 13 | DATA5 | 14 | GND |
| 15 | DATA6 | 16 | GND |
| 17 | DATA7 | 18 | GND |
| 19 | #ACK | 20 | GND |
| 21 | BUSY | 22 | GND |
| 23 | PE | 24 | GND |
| 25 | SELECT | 26 | GND |

2.19 USB Connector (USB1~3)

| Pin | Signal |
|-----|--------|
| 1 | +5V |
| 2 | USBD1- |
| 3 | USBD1+ |
| 4 | GND |
| 5 | GND |

2.20 FAN Connector (CN2)

| Pin | Signal |
|-----|-------------|
| 1 | GND |
| 2 | +5V |
| 3 | Speed Sense |

2.21 Audio Input/ Output/ CD-in/ MIC (CN3)

| Pin | Signal | Pin | Signal |
|-----|--------------|-----|--------------|
| 1 | MIC | 2 | MIC_Vcc |
| 3 | Audio Ground | 4 | CD_GND |
| 5 | LINE_IN L | 6 | CD_L |
| 7 | LINE_IN R | 8 | CD_GND |
| 9 | Audio Ground | 10 | CD_R |
| 11 | LINE_OUT L | 12 | LINE_OUT R |
| 13 | Audio Ground | 14 | Audio Ground |

2.22 LCD Inverter (CN4)

| Pin | Signal |
|-----|----------|
| 1 | 12V / 5V |
| 2 | GND |
| 3 | VCON |
| 4 | GND |
| 5 | BKL_EN |

2.23 TFT LCD (CN5)

For 24-bit TFT LCD

| Pin | Signal | Pin | Signal |
|-----|----------|-----|----------|
| 1 | +5VLCD | 2 | +5VLCD |
| 3 | GND | 4 | GND |
| 5 | +3.3VLCD | 6 | +3.3VLCD |
| 7 | BKL_EN | 8 | GND |
| 9 | B0 | 10 | B1 |
| 11 | B2 | 12 | B3 |
| 13 | B4 | 14 | B5 |
| 15 | B6 | 16 | B7 |
| 17 | G0 | 18 | G1 |
| 19 | G2 | 20 | G3 |
| 21 | G4 | 22 | G5 |
| 23 | G6 | 24 | G7 |
| 25 | R0 | 26 | R1 |
| 27 | R2 | 28 | R3 |
| 29 | R4 | 30 | R5 |
| 31 | R6 | 32 | R7 |
| 33 | GND | 34 | GND |
| 35 | LCD_CLK | 36 | LCD_VS |
| 37 | LCD_DE | 38 | LCD_HS |
| 39 | NC | 40 | TP |

For 18-bit TFT LCD

| Pin | Signal | Pin | Signal |
|------------|---------------|------------|---------------|
| 1 | +5VLCD | 2 | +5VLCD |
| 3 | GND | 4 | GND |
| 5 | +3.3VLCD | 6 | +3.3VLCD |
| 7 | BKL_EN | 8 | GND |
| 9 | B0 | 10 | B1 |
| 11 | B2 | 12 | B3 |
| 13 | B4 | 14 | B5 |
| 15 | N.C | 16 | NC |
| 17 | G0 | 18 | G1 |
| 19 | G2 | 20 | G3 |
| 21 | G4 | 22 | G5 |
| 23 | NC | 24 | NC |
| 25 | R0 | 26 | R1 |
| 27 | R2 | 28 | R3 |
| 29 | R4 | 30 | R5 |
| 31 | NC | 32 | NC |
| 33 | GND | 34 | GND |
| 35 | LCD_CLK | 36 | LCD_VS |
| 37 | LCD_DE | 38 | LCD_HS |
| 39 | NC | 40 | TP |

2.24 +5VSB Power Connector (CN6)

| Pin | Signal |
|-----|--------|
| 1 | PS_ON# |
| 2 | +5V |
| 3 | +5VSB |

2.25 AT Power_5V, 12V Connector (CN7)

| Pin | Signal |
|-----|--------|
| 1 | +5V |
| 2 | GND |
| 3 | GND |
| 4 | +12V |

2.26 LVDS1, 2 (CN9, CN10)

| Pin | Signal | Pin | Signal |
|-----|-----------|-----|----------|
| 1 | BKL_EN | 2 | NC |
| 3 | VLCD | 4 | GND |
| 5 | LVDS_CLK# | 6 | LVDS_CLK |
| 7 | VLCD | 8 | GND |
| 9 | TX0# | 10 | TX0 |
| 11 | TX1# | 12 | TX1 |
| 13 | TX2# | 14 | TX2 |
| 15 | TX3# | 16 | TX3 |
| 17 | NC | 18 | NC |
| 19 | NC | 20 | NC |
| 21 | NC | 22 | NC |

| | | | |
|----|------|----|-----|
| 23 | NC | 24 | NC |
| 25 | NC | 26 | NC |
| 27 | VLCD | 28 | GND |
| 29 | NC | 30 | NC |

2.27 PS2 Keyboard/ Mouse Connector (CN11)

| Pin | Signal |
|-----|---------|
| 1 | KB_DATA |
| 2 | MS-DATA |
| 3 | GND |
| 4 | +5V |
| 5 | KB_CLK |
| 6 | MS_CLK |

2.28 Internal Keyboard Connector (CN12)

| Pin | Signal |
|-----|---------|
| 1 | KB_CLK |
| 2 | KB_DATA |
| 3 | NC |
| 4 | GND |
| 5 | +5V |

Chapter

3

**Award
BIOS Setup**

3.1 System Test and Initialization

These routines test and initialize board hardware. If the routines encounter an error during the tests, you will either hear a few short beeps or see an error message on the screen. There are two kinds of errors: fatal and non-fatal. The system can usually continue the boot up sequence with non-fatal errors. Non-fatal error messages usually appear on the screen along with the following instructions:

Press <F1> to RESUME

Write down the message and press the F1 key to continue the boot up sequence.

System configuration verification

These routines check the current system configuration against the values stored in the CMOS memory. If they do not match, the program outputs an error message. You will then need to run the BIOS setup program to set the configuration information in memory.

There are three situations in which you will need to change the CMOS settings:

1. You are starting your system for the first time
2. You have changed the hardware attached to your system
3. The CMOS memory has lost power and the configuration information has been erased.

The HSB-8001 CMOS memory has an integral lithium battery backup for data retention. However, you will need to replace the complete unit when it finally runs down.

3.2 Award BIOS Setup

Awards BIOS ROM has a built-in Setup program that allows users to modify the basic system configuration. This type of information is stored in battery-backed CMOS RAM so that it retains the Setup information when the power is turned off.

Entering setup

Power on the computer and press immediately. This will allow you to enter Setup.

Standard CMOS Features

Use this menu for basic system configuration. (Date, time, IDE, etc.)

Advanced BIOS Features

Use this menu to set the advanced features available on your system.

Advanced Chipset Features

Use this menu to change the values in the chipset registers and optimize your system performance.

Integrated Peripherals

Use this menu to specify your settings for integrated peripherals. (Primary slave, secondary slave, keyboard, mouse etc.)

Power Management Setup

Use this menu to specify your settings for power management. (HDD power down, power on by ring etc.)

PnP/PCI Configurations

This entry appears if your system supports PnP/PCI.

PC Health Status

This menu shows you the status of PC.

Frequency/Voltage Control

This menu shows you the display of frequency/Voltage Control.

Load Fail-Safe Defaults

Use this menu to load the BIOS default values for the minimal/stable performance for your system to operate.

Load Optimized Defaults

Use this menu to load the BIOS default values that are factory settings for optimal performance system operations. While AWARD has designated the custom BIOS to maximize performance, the factory has the right to change these defaults to meet their needs.

Set Supervisor/User Password

Use this menu to set Supervisor/User Passwords.

Save and Exit Setup

Save CMOS value changes to CMOS and exit setup.

Exit Without Saving

Abandon all CMOS value changes and exit setup.

Chapter

4

**Driver
Installation**

The HSB-800I comes with a CD-ROM that contains all drivers your need.

Follow the sequence below to install the drivers:

Step 1 – Install LX-Graphics Driver

Step 2 – Install AES Driver

Step 3 – Install PCI to ISA Bridge Driver

Step 4 – Install LAN Driver

Step 5 – Install Audio Driver

Please read following instructions for detailed installations.

4.1 Installation:

Insert the HSB-8001 CD-ROM into the CD-ROM Drive. And install the drivers from Step 1 to Step 5 in order.

Step 1 –Install LX-Graphic Driver

Place the Driver CD-ROM into your CD-ROM drive and follow the steps below to install.

1. Click on **Start** button
2. Click on **Settings** button
3. Click on **Control Panel** button
4. Click on **System** button
5. Select **Hardware** and click on **Device Manager...**
6. Double click on **Video Controller (VGA Compatible)**
7. Click on **Update Driver...**
8. Click on **Next**
9. Select **Search for a suitable driver...**, then click on **Next**
10. Select **Specify a location**, then click on **Next**
11. Click on **Browse**
12. Select “**lx_win**” file from CD-ROM (**Drivers/Step 1 – LX-Graphics**) then click on **Open**
13. Click on **OK**
14. Click on **Next**
15. Click on **Yes**
16. Click on **Finish**

Step 2 –Install AES Driver

Place the Driver CD-ROM into your CD-ROM drive and follow the steps below to install.

1. Click on **Start** button
2. Click on **Settings** button
3. Click on **Control Panel** button
4. Click on **System** button
5. Select **Hardware** and click on **Device Manager...**
6. Double click on **Entertainment Encryption/Decryption Controller**
7. Click on **Update Driver...**
8. Click on **Next**
9. Select **Search for a suitable driver...**, then click on **Next**
10. Select **Specify a location**, then click on **Next**
11. Click on **Browse**
12. Select **"Ixaes"** file from CD-ROM (**Drivers/Step 2 – AES**) then click on **Open**
13. Click on **OK**
14. Click on **Next**
15. Click on **Yes**
16. Click on **Finish**

Step 3 –Install PCI to ISA Bridge Driver

1. Click on **Start** button.
2. Click on **Settings** button

3. Click on **Control Panel** button
4. Click on **System** button
5. Select **Hardware** and click on **Device Manager...**
6. Double click on **Other PCI Bridge Device**
7. Click on **Update Driver...**
8. Click on **Next**
9. Select **Search for a suitable driver...**, then click on **Next**
10. Select **Specify a location**, then click on **Next**
11. Click on **Browse**
12. Select "Ite" file from CD-ROM (**Drivers/Step 3- PCI to ISA Bridge**) then click on **open**
13. Click on **OK**
14. Click on **Next**
15. Click on **Yes**
16. Click on **Finish**

Step 4 – Install LAN Driver

1. Click on the **Step 4 –LAN** folder and select the folder of **Windows**
2. Double click on **Setup.exe**
3. Follow the instructions that the window shows
4. The system will help you install the driver automatically

Step 5– Install Audio Driver

Place the Driver CD-ROM into your CD-ROM drive and follow the steps below to install.

1. Click on **Start** button
2. Click on **Settings** button
3. Click on **Control Panel** button
4. Click on **System** button
5. Select **Hardware** and click on **Device Manager...**
6. Double click on **Multimedia Audio Controller**
7. Click on **Update Driver...**
8. Click on **Next**
9. Select **Search for a suitable driver...**, then click on **Next**
10. Select **Specify a location**, then click on **Next**
11. Click on **Browse**
12. Select “**LXWDMAu**” file from CD-ROM (**Drivers/Step 5 – Audio**) then click on **Open**
13. Click on **OK**
14. Click on **Next**
15. Click on **Yes**
16. Click on **Finish**

Appendix

A

Programming the Watchdog Timer


A.1 Programming

HSB-8001 utilizes ITE 8712 chipset as its watchdog timer controller. (K version)

Below are the procedures to complete its configuration and the intial watchdog timer program is also attached based on which you can develop customized program to fit your application.

Configuring Sequence Description

After the hardware reset or power-on reset, the ITE 8712 enters the normal mode with all logical devices disabled except KBC.

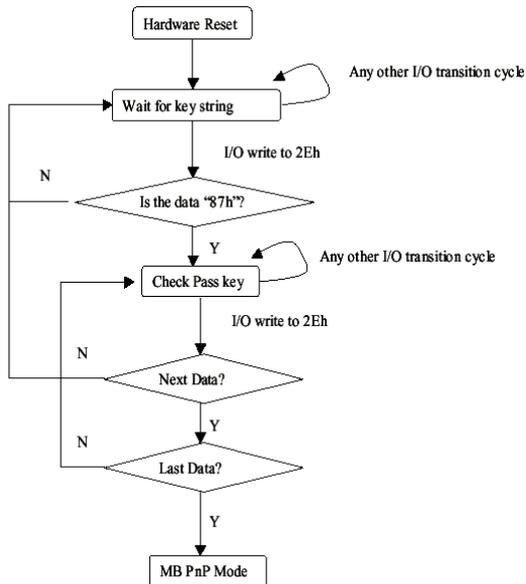

There are three steps to complete the configuration setup: (1) Enter the MB PnP Mode; (2) Modify the data of configuration registers; (3) Exit the MB PnP Mode. Undesired result may occur if the MB PnP Mode is not exited normally.

(1) Enter the MB PnP Mode

To enter the MB PnP Mode, four special I/O write operations are to be performed during Wait for Key state. To ensure the initial state of the key-check logic, it is necessary to perform four write operations to the Special Address port (2EH). Two different enter keys are provided to select configuration ports (2Eh/2Fh) of the next step.

| | Address Port | Data Port |
|---------------------|--------------|-----------|
| 87h, 01h, 55h, 55h: | 2Eh | 2Fh |

(2) Modify the Data of the Registers

All configuration registers can be accessed after entering the MB PnP Mode. Before accessing a selected register, the content of Index 07h must be changed to the LDN to which the register belongs, except some Global registers.

(3) Exit the MB PnP Mode

Set bit 1 of the configure control register (Index=02h) to 1 to exit the MB PnP Mode.

WatchDog Timer Configuration Registers

| LDN | Index | R/W | Reset | Configuration Register or Action |
|-----|-------|-----|-------|--|
| All | 02H | W | N/A | Configuration Control |
| 07H | 71H | R/W | 00H | WatchDog Timer Control Register |
| 07H | 72H | R/W | 00H | WatchDog Timer Configuration Register |
| 07H | 73H | R/W | 00H | WatchDog Timer Time-out Value (LSB) Register |
| 07H | 74H | R/W | 00H | WatchDog Timer Time-out Value (MSB) Register |

Configure Control (Index=02h)

This register is write only. Its values are not sticky; that is to say, a hardware reset will automatically clear the bits, and does not require the software to clear them.

| Bit | Description |
|-----|---|
| 7-2 | Reserved |
| 1 | Returns to the Wait for Key state. This bit is used when the configuration sequence is completed. |
| 0 | Resets all logical devices and restores configuration registers to their power-on states. |

WatchDog Timer Control Register (Index=71h, Default=00h)

| Bit | Description |
|-----|---|
| 7 | WDT is reset upon a CIR interrupt |
| 6 | WDT is reset upon a KBC (Mouse) interrupt |
| 5 | WDT is reset upon a KBC (Keyboard) interrupt |
| 4 | WDT is reset upon a read or a write to the Game port base address |
| 3-2 | Reserved |
| 1 | Force Time-out. This bit is self-clearing |
| 0 | WDT status 1: WDT value reaches 0 0: WDT value is not 0 |

WatchDog Timer Configuration Register (Index=72h, Default=00h)

| Bit | Description |
|-----|--|
| 7 | WDT Time-out value select 1: Second 0: Minute |
| 6 | WDT output through KRST (pulse) enable |
| 5 | WDT Time-out value Extra select 1: 4s. 0: Determine by WDT Time-out value select (bit7 of this register) |

| | |
|---|--|
| 4 | WDT output through PWROK1/PWROK2 (pulse) enable |
| 3 | Select the interrupt level ^{note} for WDT |

**WatchDog Timer Time-out Value (LSB) Register (Index=73h,
Default=00h)**

| Bit | Description |
|-----|------------------------|
| 7-0 | WDT Time-out value 7-0 |

**WatchDog Timer Time-out Value (MSB) Register (Index=74h,
Default=00h)**

| Bit | Description |
|-----|-------------------------|
| 7-0 | WDT Time-out value 15-8 |

A.2 ITE8712 Watchdog Timer Initial Program

```
.MODEL SMALL
.CODE
Main:
    CALL Enter_Configuration_mode
    CALL Check_Chip
    mov cl, 7
    call Set_Logic_Device
    ;time setting
    mov cl, 10 ; 10 Sec
    dec al
```

Watch_Dog_Setting:

```
;Timer setting
mov al, cl
mov cl, 73h
call Superio_Set_Reg
;Clear by keyboard or mouse interrupt
mov al, 0f0h
mov cl, 71h
call Superio_Set_Reg
;unit is second.
mov al, 0C0H
mov cl, 72h
call Superio_Set_Reg
; game port enable
mov cl, 9
call Set_Logic_Device
```

Initial_OK:

```
CALL Exit_Configuration_mode
MOV AH,4Ch
INT 21h
```

```
Enter_Configuration_Mode PROC NEAR
MOV SI,WORD PTR CS:[Offset Cfg_Port]
```

```
MOV DX,02Eh
MOV CX,04h
Init_1:
MOV AL,BYTE PTR CS:[SI]
OUT DX,AL
INC SI
LOOP Init_1
RET
Enter_Configuration_Mode ENDP

Exit_Configuration_Mode PROC NEAR
MOV AX,0202h
CALL Write_Configuration_Data
RET
Exit_Configuration_Mode ENDP

Check_Chip PROC NEAR

MOV AL,20h
CALL Read_Configuration_Data
CMP AL,87h
JNE Not_Initial

MOV AL,21h
CALL Read_Configuration_Data
```

```
CMP AL,12h
JNE Not_Initial
```

Need_Initial:

```
STC
RET
```

Not_Initial:

```
CLC
RET
Check_Chip ENDP
Read_Configuration_Data PROC NEAR
MOV DX,WORD PTR CS:[Cfg_Port+04h]
OUT DX,AL
MOV DX,WORD PTR CS:[Cfg_Port+06h]
IN AL,DX
RET
Read_Configuration_Data ENDP
```

```
Write_Configuration_Data PROC NEAR
MOV DX,WORD PTR CS:[Cfg_Port+04h]
OUT DX,AL
XCHG AL,AH
MOV DX,WORD PTR CS:[Cfg_Port+06h]
OUT DX,AL
RET
```

Write_Configuration_Data ENDP

Superio_Set_Reg proc near

push ax

MOV DX,WORD PTR CS:[Cfg_Port+04h]

mov al,cl

out dx,al

pop ax

inc dx

out dx,al

ret

Superio_Set_Reg endp.Set_Logic_Device proc near

Set_Logic_Device proc near

push ax

push cx

xchg al,cl

mov cl,07h

call Superio_Set_Reg

pop cx

pop ax

ret

Set_Logic_Device endp

;Select 02Eh->Index Port, 02Fh->Data Port

Cfg_Port DB 087h,001h,055h,055h

DW 02Eh,02Fh

END Main

Note: Interrupt level mapping

0Fh-Dh: not valid

0Ch: IRQ12

.

.

03h: IRQ3

02h: not valid

01h: IRQ1

00h: no interrupt selected

Appendix


B

I/O Information


B.1 I/O Address Map

| | |
|-----------------|---|
| NONO-F502DB7138 | |
| + | Direct memory access (DMA) |
| - | Input/output (IO) |
| | [00000000 - 0000000F] Direct memory access controller |
| | [00000000 - 00000CF7] PCI bus |
| | [00000010 - 0000001F] Motherboard resources |
| | [00000020 - 00000021] Programmable interrupt controller |
| | [00000022 - 0000002D] Motherboard resources |
| | [00000030 - 0000003F] Motherboard resources |
| | [00000040 - 00000043] System timer |
| | [00000044 - 0000005F] Motherboard resources |
| | [00000060 - 00000060] Standard 101/102-Key or Microsoft Natural PS/2 Keyboard |
| | [00000061 - 00000061] System speaker |
| | [00000062 - 00000063] Motherboard resources |
| | [00000064 - 00000064] Standard 101/102-Key or Microsoft Natural PS/2 Keyboard |
| | [00000065 - 0000006F] Motherboard resources |
| | [00000070 - 00000073] System CMOS/real time clock |
| | [00000074 - 0000007F] Motherboard resources |
| | [00000080 - 00000090] Direct memory access controller |
| | [00000091 - 00000093] Motherboard resources |
| | [00000094 - 0000009F] Direct memory access controller |
| | [000000A0 - 000000A1] Programmable interrupt controller |
| | [000000A2 - 000000BF] Motherboard resources |
| | [000000C0 - 000000DF] Direct memory access controller |
| | [000000E0 - 000000EF] Motherboard resources |
| | [000000F0 - 000000FF] Numeric data processor |
| | [00000170 - 00000177] Secondary IDE Channel |
| | [000001F0 - 000001F7] Primary IDE Channel |
| | [00000274 - 00000277] ISAPNP Read Data Port |
| | [00000279 - 00000279] ISAPNP Read Data Port |
| | [000002F8 - 000002FF] Communications Port (COM2) |
| | [00000376 - 00000376] Secondary IDE Channel |
| | [00000378 - 0000037F] Printer Port (LPT1) |
| | [000003B0 - 000003BA] Advanced Micro Devices Win 2K/XP Graphics Driver |
| | [000003C0 - 000003DF] Advanced Micro Devices Win 2K/XP Graphics Driver |
| | [000003F0 - 000003F5] Standard floppy disk controller |
| | [000003F6 - 000003F6] Primary IDE Channel |
| | [000003F7 - 000003F7] Standard floppy disk controller |
| | [000003F8 - 000003FF] Communications Port (COM1) |
| | [000004D0 - 000004D1] Motherboard resources |
| | [000004E8 - 000004EF] Communications Port (COM4) |
| | [000004F8 - 000004FF] Communications Port (COM3) |
| | [00000800 - 00000805] Motherboard resources |
| | [00000A79 - 00000A79] ISAPNP Read Data Port |
| | [00000D00 - 0000AC17] PCI bus |
| | [0000AC20 - 0000FFFF] PCI bus |
| | [0000FC00 - 0000FCFF] Realtek RTL8139/810x Family Fast Ethernet NIC |
| | [0000FE00 - 0000FE7F] Geode WDM Audio Driver for Samba |
| | [0000FF00 - 0000FF0F] Standard Dual Channel PCI IDE Controller |
| + | Interrupt request (IRQ) |
| + | Memory |

B.2 Memory Address Map

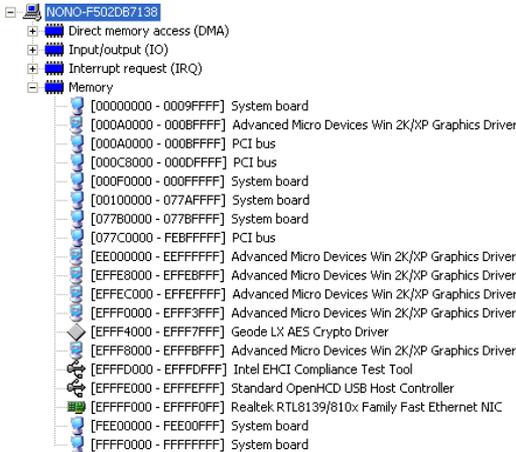

B.3 IRQ Mapping Chart

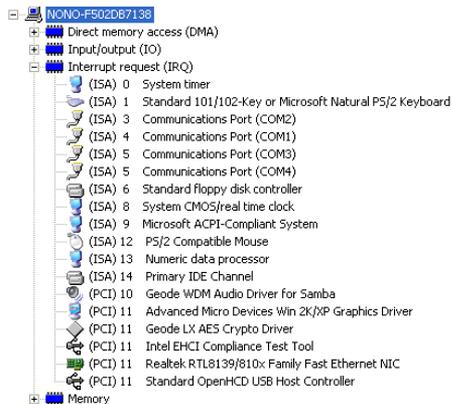

B.4 DMA Channel Assignments

