



Operating Guide

EPIA LN-Series Mini-ITX Mainboard

Table of Contents

| | |
|--|----|
| Table of Contents | i |
| VIA EPIA LN-Series Overview..... | 1 |
| VIA EPIA LN-Series Layout..... | 2 |
| VIA EPIA LN-Series Specifications | 3 |
| VIA EPIA LN Processor SKUs | 4 |
| VIA CN700 Chipset Overview | 5 |
| VIA EPIA LN-Series I/O Back Panel Layout..... | 6 |
| VIA EPIA LN-Series Layout Diagram & Mounting Holes..... | 7 |
| VIA EPIA LN-Series Layout Diagram & Height Distribution..... | 8 |
| Power Consumption..... | 9 |
| VIA EPIA LN10000E..... | 9 |
| Power Specifications | 11 |
| VIA EPIA LN-Series Microsoft and Linux Driver Support | 12 |
| MICROSOFT DRIVER SUPPORT | 12 |
| LINUX DRIVER SUPPORT | 12 |
| Contact | 13 |

VIA EPIA LN-Series Overview


The VIA EPIA LN-Series Mini-ITX Mainboard is an ultra compact native x86 platform optimized for today's demanding embedded and productivity applications. The mainboard is based on the VIA CN700 chipset featuring an embedded hardware MPEG-2 accelerator and integrated VIA C-Pro 2D/3D graphics for rich digital media performance. With the sizable memory bandwidth of DDR2 533MHz SDRAM DIMM and the high data transfer speed of ATA-133 and further enhanced by support of 8-Channel AC'97 codec for Smart 5.1 surround sound and SPDIF, the VIA EPIA LN-Series delivers the increased performance levels required by today's embedded digital media applications.

The latest in high-bandwidth connectivity is supported with six USB 2.0 ports, as well as a COM port and has one 10/100 Fast Ethernet port for extended broadband connectivity. The VIA EPIA LN-Series also has one PCI slot for expandability options. The VIA EPIA LN-Series is compatible with a full range of Mini-ITX chassis as well as FlexATX and MicroATX enclosures and power supplies.

The VIA EPIA LN-Series is fully compatible with Microsoft® and Linux operating systems and is available in a variety of configurations, including the latest VIA C7™ V4 Bus NanoBGA2 processor for small, low power and secure x86 processor platforms.

VIA EPIA LN-Series Layout

VIA EPIA-LN Mini-ITX Mainboard (Dimension 17cm x 17cm)

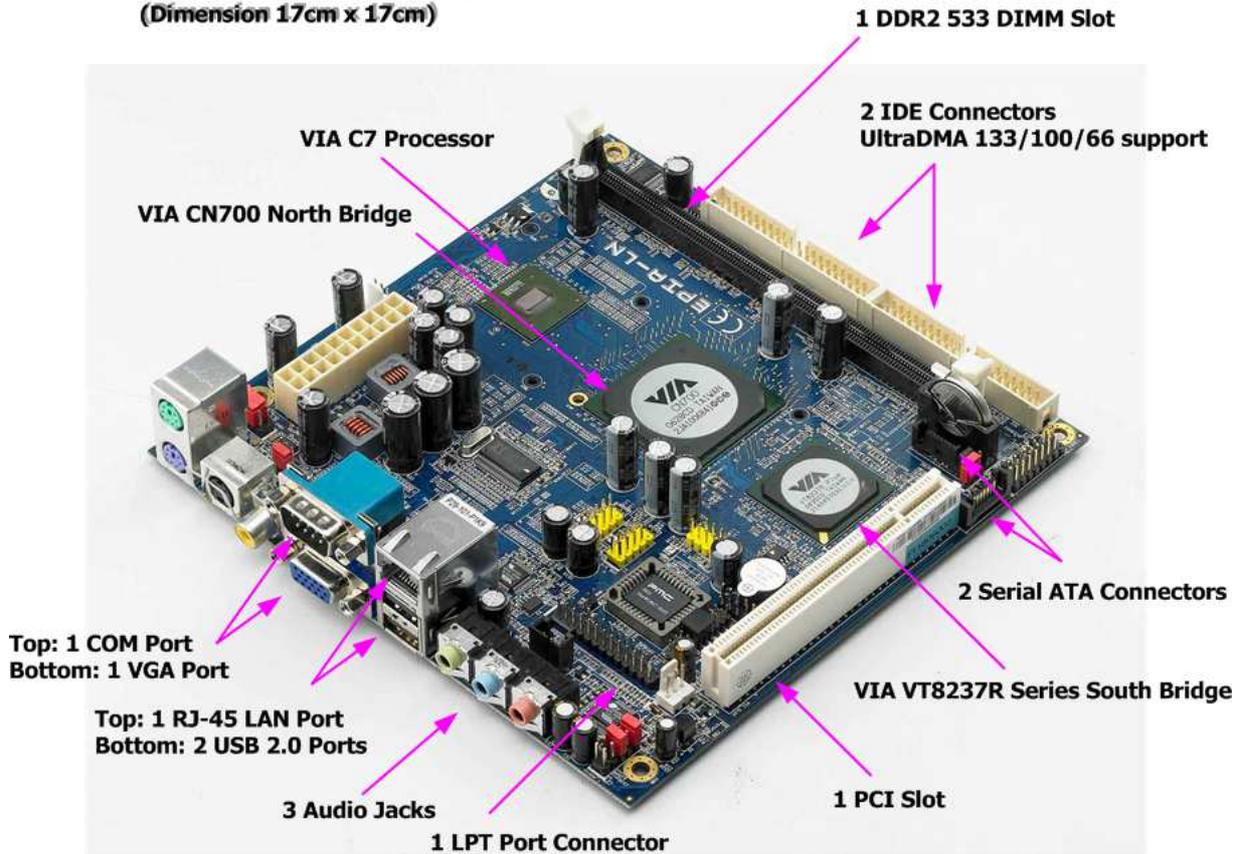

VIA EPIA LN-Series Specifications

| | |
|---|--|
| Model Name | - EPIA - LN10000E |
| Processor | - VIA C7 1.0GHz NanoBGA2 |
| Chipset | - VIA CN700 North Bridge - VIA VT8237R-Series South Bridge |
| System Memory | - 1 DDR2 533 DIMM slot - Up to 1GB memory size |
| VGA | - Integrated VIA C-Pro AGP graphics with MPEG-2 acceleration |
| Expansion Slots | - 1 PCI |
| Onboard IDE | - 2 UltraDMA 133/100/66 Connectors |
| Onboard Serial ATA | - 2 SATA Connectors |
| Onboard LAN | - VIA VT6103 10/100 Base-T Ethernet PHY |
| Onboard Audio | - VIA VT1618 8 channel AC'97 Codec |
| Onboard TV Out | - VT1622A SDTV Encoder |
| Onboard I/O Connectors | - 3 USB pin header for 6 additional USB 2.0 ports - 1 LPC connector - 1 LPT connector - 1 Front-panel audio pin header (Mic-in and Line-out) - 1 Front-panel pin header - 1 CIR pin header (Switchable for KB/MS) - 2 Fan connectors: CPU/Sys FAN - 1 FIR pin header - 1 SMBus pin header - 1 S/PDIF Out connector - 1 Buzzer - 1 ATX Power Connector |
| Back Panel I/O | - 1 PS2 Mouse port - 1 PS2 Keyboard port - 1 Serial port - 1 VGA port - 1 RJ-45 LAN port - 2 USB 2.0 ports - 3 Audio jacks: line-out, line-in and mic-in (Horizontal, Smart 5.1 Support) - 1 RCA jack for composite TV output - 1 S-Video port |
| BIOS | Award BIOS, LPC 2/4/8Mbit flash memory |
| Operating System | Windows 2000 / XP, Linux, Win CE, XPe |
| System Monitoring & Management | - System voltage monitoring - CPU/SYS Fan speeding monitoring - RTC timer power-on, Wake-on-LAN/Ring/Keyboard/Mouse, AC power failure recovery |
| Operating Temperature | 0 ~ 50°C |
| Operating Humidity | 0% ~ 95% (relative humidity; non-condensing) |
| Form Factor | - Mini-ITX (4-layer) - 17 cm x 17 cm |

* The specification is subject to change without prior notice.

VIA EPIA LN Processor SKUs

The VIA EPIA LN-Series is available in 1.0GHz speed grades. The VIA EPIA LN10000E utilizes the most efficient VIA C7™ V4 Bus NanoBGA2 processor.



EPIA LN10000E

VIA C7™ V4 Bus processor
1.0 GHz
1.004v Operating Volts
128KB L1 Cache
128KB L2 Cache
MMX, SSE, SSE2 and SSE3
Padlock and ACE Encryption




Suitable for small, low power, ultra efficient and secure x86 platform.



PadLock ACE US government approved Advanced Encryption Standard (AES), performing cryptographic functions for securing e-mails, personal files, online transactions, and networks.


VIA CN700 Chipset Overview

The VIA CN700 Chipset is designed to enable high quality digital video streaming and DVD playback in a new generation of fanless, small form factor PCs and IA devices. The [CN700](#) features the embedded VIA C-Pro 2D/3D MPEG-2 acceleration, DDR2 533/400MHz support, motion compensation and duo-view support to ensure a rich overall entertainment experience. Outstanding connectivity features include USB 2.0, 10/100 LAN and ATA/133.

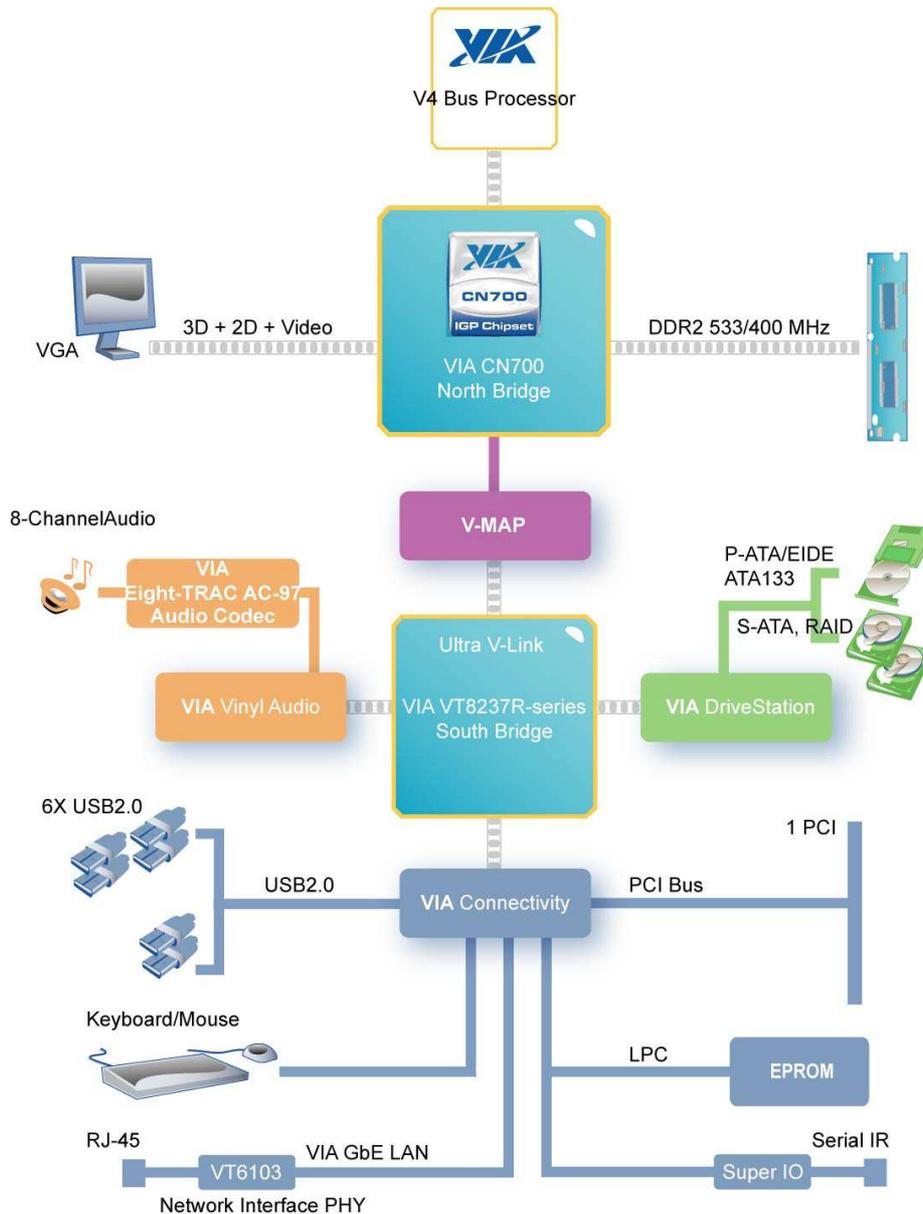


VIA EPIA LN-Series I/O Back Panel Layout


The EPIA LN's ultra compact 17cm x 17cm, integrated design supports all the standard legacy x86 connectivity options as well as PS/2 Mouse port, PS/2 Keyboard port, VGA port, COM port, RJ45 LAN port, USB 2.0 ports, composite RCA jack, S-Video port and audio jacks.

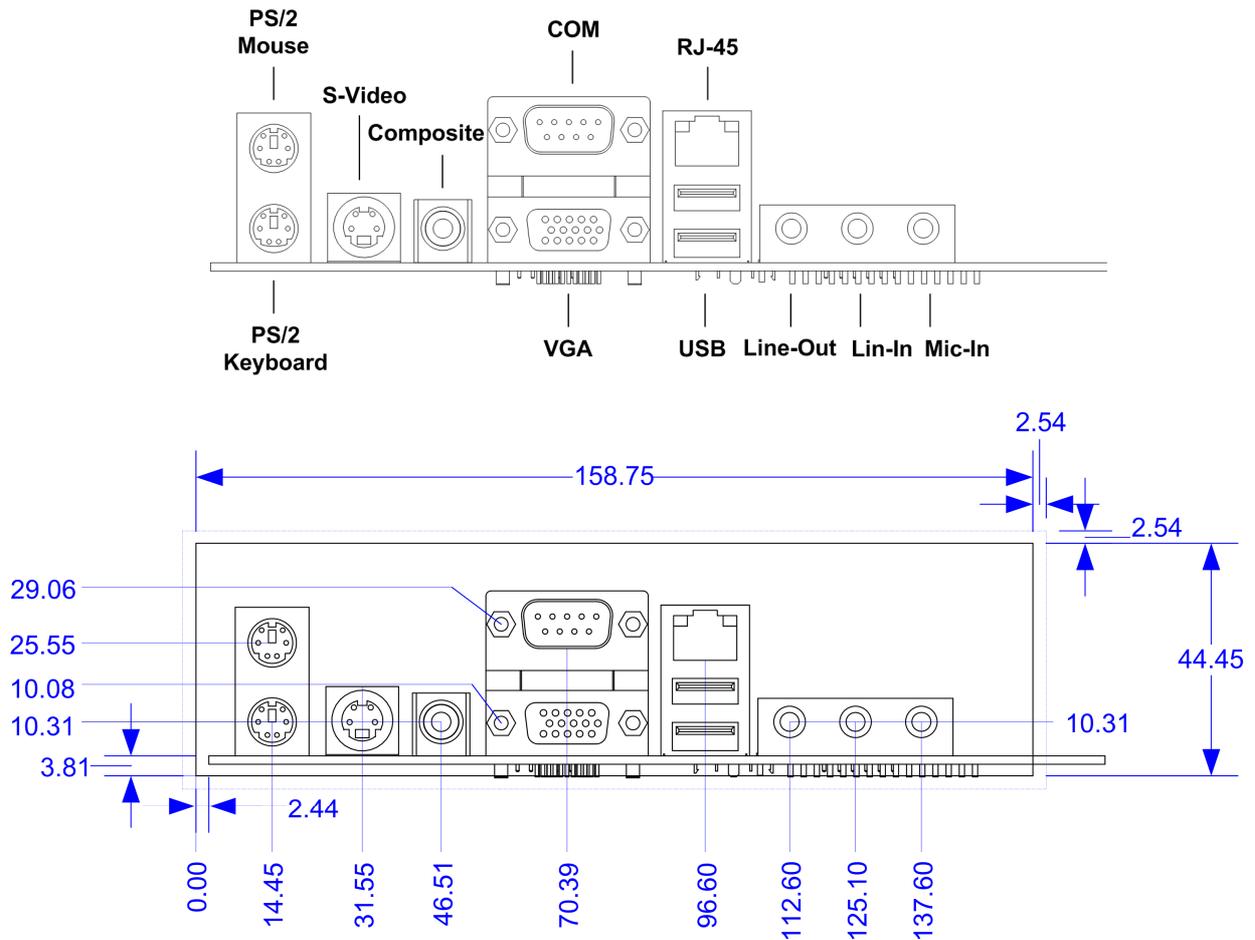

VIA EPIA LN-Series Layout Diagram & Mounting Holes

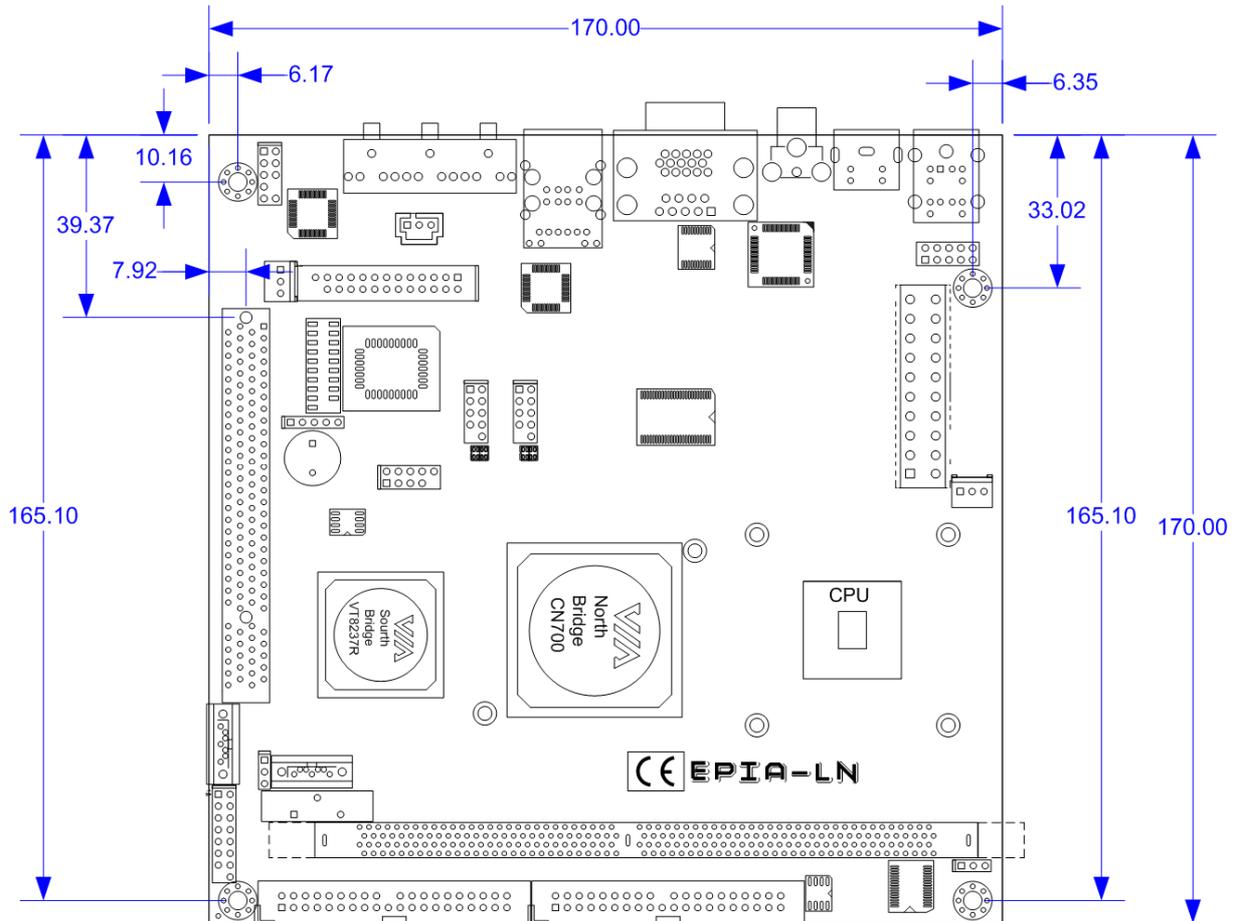

VIA EPIA LN-Series Layout Diagram & Height Distribution

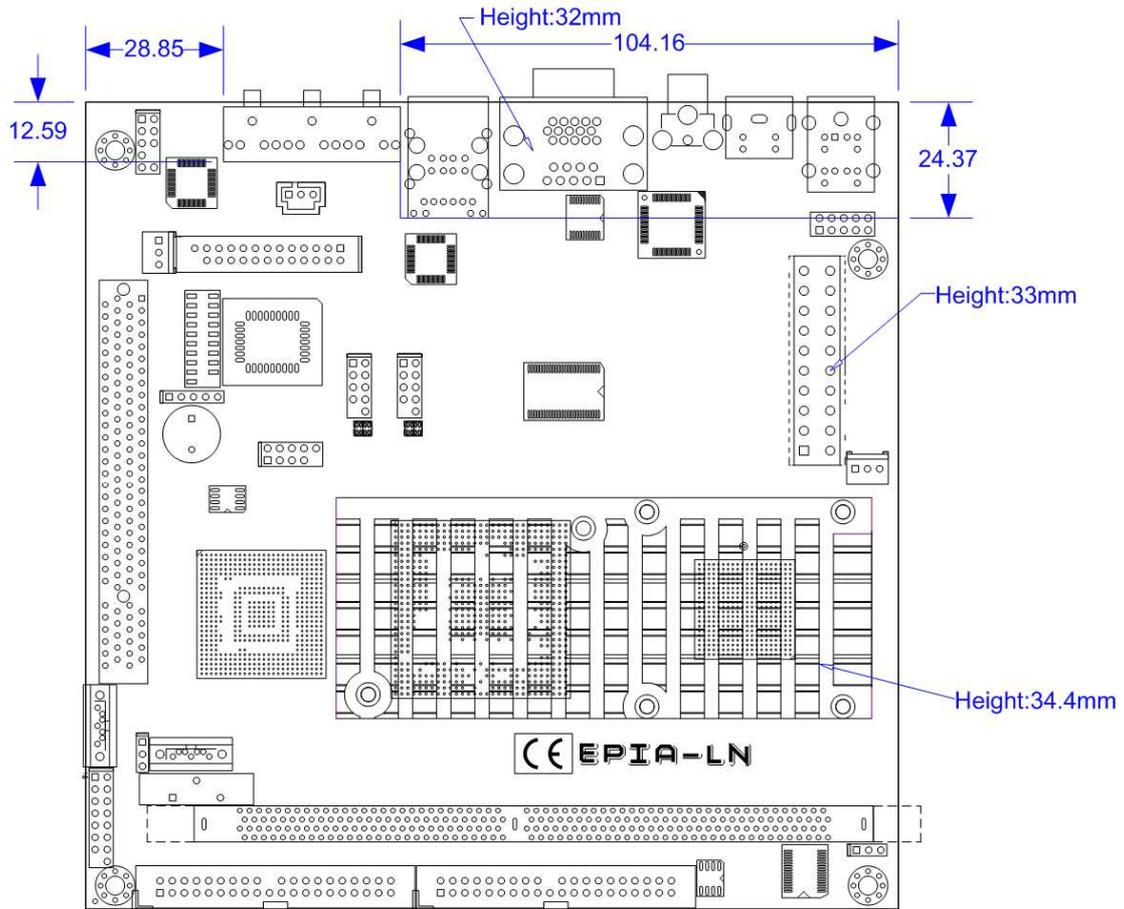

Else height under 21mm

Power Consumption

Power consumption tests were carried out comparing the VIA EPIA LN10000E (running with the 1.0GHz VIA C7™ V4 Bus NanoBGA2 processor). The following tables are a comprehensive breakdown of the EPIA platform's voltage, amp and wattage values while running common system applications.

VIA EPIA LN10000E

A. IDEL Status

| | Measured Voltage | Measured Amp. | Watts |
|-------------------------------------|------------------|---------------|---------------|
| Main Board +3.3V | 3.255 | 2.267 | 7.379 |
| Main Board +5V | 5.079 | 0.487 | 2.473 |
| Main Board 5VSB | 1.968 | 0.093 | 0.183 |
| Main Board +12V | 12.012 | 0.198 | 2.378 |
| Main Board Power Consumption | | | 12.414 |

B. MP3 Playing

| | Measured Voltage | Measured Amp. | Watts |
|-------------------------------------|------------------|---------------|---------------|
| Main Board +3.3V | 3.242 | 2.427 | 7.868 |
| Main Board +5V | 5.056 | 1.133 | 5.728 |
| Main Board 5VSB | 4.962 | 0.092 | 0.457 |
| Main Board +12V | 12.029 | 0.196 | 2.358 |
| Main Board Power Consumption | | | 16.411 |

C. DVD Playing

| | Measured Voltage | Measured Amp. | Watts |
|-------------------------------------|------------------|---------------|---------------|
| Main Board +3.3V | 3.236 | 2.527 | 8.177 |
| Main Board +5V | 5.057 | 1.008 | 5.097 |
| Main Board 5VSB | 4.959 | 0.091 | 0.451 |
| Main Board +12V | 12.021 | 0.195 | 2.344 |
| Main Board Power Consumption | | | 16.070 |

D. S3 Status

| | Measured Voltage | Measured Amp. | Watts |
|-------------------------------------|------------------|---------------|--------------|
| Main Board +3.3V | 0.032 | -0.034 | -0.001 |
| Main Board +5V | 0.003 | -0.028 | 0.000 |
| Main Board 5VSB | 5.000 | 0.135 | 0.675 |
| Main Board +12V | -0.001 | -0.006 | 0.000 |
| Main Board Power Consumption | | | 0.674 |

E. Run C.C. Winstone 2001


| | Measured Voltage | Measured Amp. | Watts |
|-------------------------------------|------------------|---------------|---------------|
| Main Board +3.3V | 3.243 | 2.329 | 7.553 |
| Main Board +5V | 5.058 | 1.099 | 5.559 |
| Main Board 5VSB | 4.962 | 0.091 | 0.452 |
| Main Board +12V | 12.020 | 0.193 | 2.320 |
| Main Board Power Consumption | | | 15.883 |

F. Data Download from Network

| | Measured Voltage | Measured Amp. | Watts |
|-------------------------------------|------------------|---------------|---------------|
| Main Board +3.3V | 3.241 | 2.332 | 7.558 |
| Main Board +5V | 5.072 | 0.752 | 3.814 |
| Main Board 5VSB | 4.966 | 0.092 | 0.457 |
| Main Board +12V | 12.012 | 0.195 | 2.342 |
| Main Board Power Consumption | | | 14.171 |

Power Specifications

The EPIA LN utilizes an industry standard 20-pin ATX main connector to the power supply. Due to the EPIA LN platform's ultra low power requirements a 90 – 120 Watt ATX power supply is ample for even the heaviest of multimedia system applications.

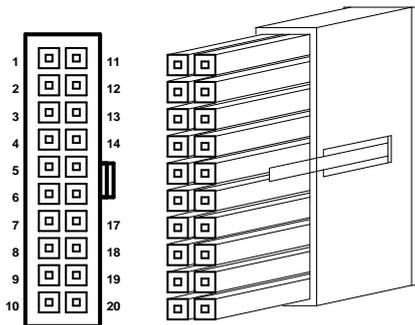

| | | | |
|-----------|--------|-----------|---------|
| 1 | +3V | 11 | +3V |
| 2 | +3V | 12 | -12V |
| 3 | Gnd | 13 | Gnd |
| 4 | +5V | 14 | PWR_ON- |
| 5 | Gnd | 15 | Gnd |
| 6 | +5V | 16 | Gnd |
| 7 | Gnd | 17 | Gnd |
| 8 | PWR_GD | 18 | NC |
| 9 | 5V_SB | 19 | +5V |
| 10 | +12V | 20 | +5V |

Note: NC = no connection

VIA EPIA LN-Series Microsoft and Linux Driver Support

Microsoft Driver Support

VIA EPIA LN series offers full support for the complete range of Microsoft operating systems.

For standard operating systems, Windows 98/Me/2000/XP latest drivers downloads can be found in the VEPD website at www.viaembedded.com.

For embedded operating systems, Windows CE.NET and XP Embedded related driver supports can be found in the VIA Arena website at www.viaarena.com.

Linux Driver Support

VIA EPIA LN mainboards have a very high degree of support under Linux.

Support and drivers are provided through various methods including:

- Drivers provided by VIA
 - Using a driver built into a distribution package
 - Visiting VIA Arena website at www.viaarena.com for latest updates on a monthly basis
- Installing a third party driver (such as the ALSA driver from the Advanced Linux Sound Architecture project for integrated audio)

For OEM clients and system integrators developing a product for long term production, other code and resources may also be made available. You can submit a request either through the [Developers portal](#) on VIA Arena, or through your VEPD support contact. Alternatively, VIA can work further towards providing additional drivers to suite your specific needs.

Contact

For more information on the VIA EPIA LN-Series Mini ITX Mainboard contact your sales representative or visit our website at www.viaembedded.com



Taiwan Headquarters

1F, 531 Zhong-Zheng Road
Xindian District, New Taipei City
231,
Taiwan

TEL: 886.2.2218.5452

FAX: 886.2.2218.5453

Email: embedded@via.com.tw



USA

940 Mission Court
Fremont, CA 94539
USA

TEL: 1.510.683.3300

FAX: 1.510.687.4654

Email: embedded@viatech.com



Europe

In den Dauen 6
53117 Bonn
Germany

TEL: 49.228.688565.0

FAX: 49.228.688565.19

Email: embedded@via-tech.de



China

Tsinghua Science Park Bldg. 7
No. 1 Zongguancun East Road
Haiden District, Beijing 100084

TEL: 86.10.59852288

FAX: 86.10.59852299

Email: embedded@viatech.com.cn



Japan

3-15-7 Ebisu MT Bldg. 6F
Higashi, Shibuya-ku
Tokyo 150-0011

TEL: 81.3.5466.1637

FAX: 81.3.5466.1638

Email: embedded@viatech.co.jp



Korea

2F, Sangjin Bldg., 417
Dogok-Dong, Gangnam-Gu
Seoul 135-854

TEL: 82.2.571.2986

FAX: 82.2.571.2987

Email: embedded@via-korea.com