
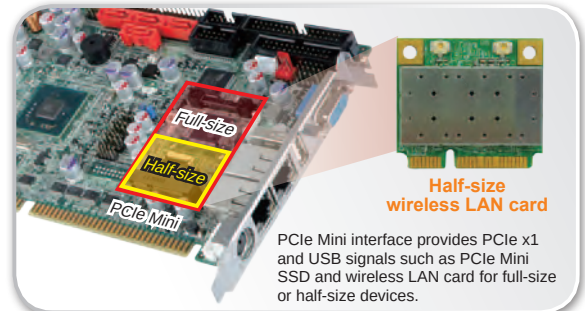


WSB-H610

Full-size PICMG 1.0 CPU Card Supports 32nm LGA1155 Intel® Core™ i7/i5/i3/Pentium®/Celeron® CPU with Intel® H61, DDR3, VGA/DVI-D, Dual Realtek PCIe GbE, USB 2.0, SATA 3Gb/s, COMs, HD Audio and RoHS

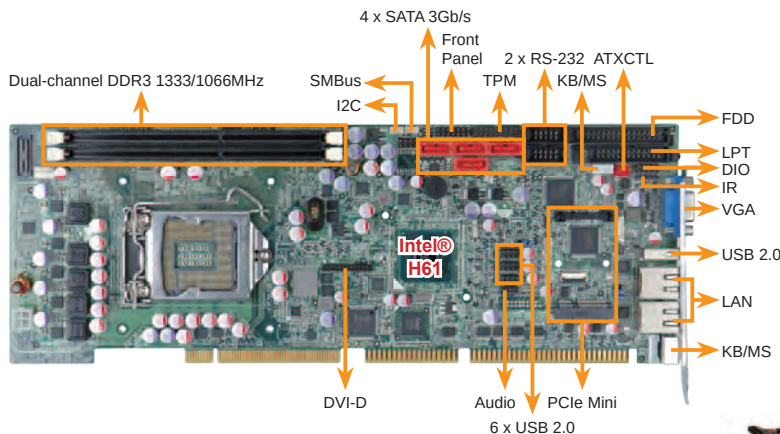

IO-KIT-001

DVI cable included in DVI model

CF-1156C-RS

1U chassis compatible

The 2nd generation Intel® processors provide advanced technology and intelligent performance.

Specifications

- ◆ CPU: LGA1155 socket supports Intel® Core™ i7/i5/i3/Pentium®/Celeron® processor
- ◆ PCH: Intel® H61
- ◆ Memory: Two 240-pin 1333/1066MHz dual-channel DDR3 & DDR3L (1.35V) DIMMs supported (system max. 16GB)
- ◆ BIOS: UEFI
- ◆ Graphics Engine: Intel® HD Graphics Gen 6 supports DX10.1 and OpenGL 3.0 Full MPEG2, VC1, AVC Decode
- ◆ Display Output: 1 x VGA (up to 2048 x 1536 @75Hz) 1 x DVI-D (up to 1920 x 1200 @60Hz) (via header to IO-KIT-001-R20 DVI-D/USB module) (optional)
- ◆ Ethernet: LAN1: Realtek RTL8111E PCIe GbE controller with ASF 2.0 support LAN2: Realtek RTL8111E PCIe GbE controller
- ◆ Super I/O: Fintek F81866
- ◆ Embedded Controller: ITE IT8519E
- ◆ PCIe-PCI Bridge: ITE IT8892E
- ◆ PCI-ISA Bridge: ITE IT8888G
- ◆ I/O Interface: 2 x RS-232 1 x RS-422/485 1 x LPT 1 x FDD 1 x PS/2 KB/MS 1 x 6-pin wafer for KB & MS 7 x USB 2.0 (1 on rear, 6 by pin header) 4 x SATA 3Gb/s (H61 doesn't support AHCI & RAID)
- ◆ Audio: Supports 7.1 channel HD audio by IEI AC-KIT-892HD-R10 kit
- ◆ Front Panel: 1 x Front panel (power LED, HDD LED, speaker, power button, reset button)
- ◆ TPM: 2 x 10-pin header
- ◆ SMBus: 1 x 4-pin wafer
- ◆ I2C: 1 x 4-pin wafer
- ◆ Expansions: PCI signal and ISA signal via golden finger
- ◆ Watchdog Timer: Software programmable supports 1~255 sec. system reset
- ◆ Digital I/O: 8-bit digital I/O (4-bit input, 4-bit output)
- ◆ Fan Connector: 1 x 4-pin smart fan connector 1 x 4-pin system fan connector
- ◆ Power Supply: 5V/12V, AT/ATX support
- ◆ Power Consumption: 5V@4.53A, 12V@0.19A, Vcore_12V@7.81A, 5VSB@0.18A (3.4GHz Intel® Core™ i7-2600K with two 2GB 1333MHz DDR3 memory)
- ◆ Operating Temperature: -10°C ~ 60°C
- ◆ Storage Temperature: -20°C ~ 70°C
- ◆ Operating Humidity: 5% ~ 95%, non-condensing
- ◆ Dimensions: 338 mm x 122 mm
- ◆ Weight: GW: 1000g/NW: 260g

Features

1. Full-size PICMG 1.0 CPU card with LGA1155 Intel® Core™ i7/i5/i3/Pentium®/Celeron® processor supported
2. Two DDR3 & DDR3L 1333/1066MHz DIMM SDRAM supported up to 16GB
3. Embedded controller on board supports infrared and PECI 2.0 technologies
4. Dual Realtek PCIe GbE and LAN1 with ASF 2.0 support
5. TPM V1.2 hardware security function supported by TPM module
6. IEI One Key Recovery solution allows you to create rapid OS backup and recovery

Packing List

1 x WSB-H610 single board computer	
1 x Dual RS-232 cable w/bracket (P/N: 19800-000051-RS)	
1 x KB/MS Y cable (P/N: 32006-000300-100-RS)	
1 x USB cable (P/N: 19800-003100-300-RS)	1 x Mini jumper pack
2 x SATA cable (P/N: 32000-062800-RS)	1 x Utility CD
1 x One Key Recovery CD	1 x QIG (Quick Installation Guide)

Ordering Information

Part No.	Description
WSB-H610-R10	Full-size PICMG 1.0 CPU card supports 32nm LGA1155 Intel® Core™ i7/i5/i3/Pentium®/Celeron® CPU with Intel® H61, DDR3, VGA, dual Realtek PCIe GbE, USB 2.0, SATA 3Gb/s, COM, HD Audio and RoHS
WSB-H610-DVI-R10	Full-size PICMG 1.0 CPU card supports 32nm LGA1155 Intel® Core™ i7/i5/i3/Pentium®/Celeron® CPU with Intel® H61, DDR3, VGA/DVI-D, dual Realtek PCIe GbE, USB 2.0, SATA 3Gb/s, COM, HD Audio and RoHS
32006-000300-100-RS	Male PS/2 KB/MS Y-cable w/o bracket, 12cm(KB)+14cm(MS)
19800-000075-RS	PS/2 KB/MS Y-cable with bracket, 6-pin header, 220mm
SAIDE-KIT01-R10	SATA to IDE/CF converter board
32102-000100-200-RS	SATA power cable
19800-000049-RS	LPT cable
32200-000017-RS	FDD cable
AC-KIT-892HD-R10	7.1 channel HD audio kit with Realtek ALC892 supports dual audio streams
CPU-DT-i5-2500T	Intel® Core™ i5-2500T processor, LGA1155, quad core 2.3GHz, 6M cache, 45W, compatible with CF-1156C-RS CPU cooler
CPU-DT-i5-2390T	Intel® Core™ i5-2390T processor, LGA1155, dual core 2.7GHz, 3M cache, 35W, AMT, compatible with CF-1156C-RS CPU cooler
CPU-DT-i3-2120T	Intel® Core™ i3-2120T processor, LGA1155, dual core 2.6GHz, 3M cache, 35W, compatible with CF-1156C-RS CPU cooler
CPU-DT-P-G630T	Intel® Pentium® G630T processor, LGA1155, dual core 2.3GHz, 3M cache, 35W, compatible with CF-1156C-RS CPU cooler
CPU-DT-C-G440	Intel® Celeron® G440 processor, LGA1155, single core 1.6GHz, 1M cache, 35W, compatible with CF-1156C-RS CPU cooler
CF-1156A-RS-R11	High performance LGA1155/LGA1156 cooler kit, 1U chassis compatible, 73W
CF-1156C-RS	LGA1155/LGA1156 cooler kit, 1U chassis compatible, 45W
CF-1156D-RS	LGA1155/LGA1156 cooler kit, 1U chassis compatible, 65W
CF-1156E-R11	High performance LGA1155/LGA1156 cooler kit, 95W
TPM-IN01-R11	20-pin Infineon TPM module, software management tool, firmware V3.17

1
Industrial
Computing
Solutions

2
Video
Capture
Solutions

3
Embedded
Computing
Solutions

4
Automation
Control

5
ORing
Network
Communication

6
Power Supply/
Peripherals

7
Panel
Solutions
Introduction