


SYSKONNECT, INC.
FDDI-FI/FDDI-TI/FDDI-SI

NIC Type FDDI
Transfer Rate 100Mbps
Data Bus 16-bit ISA
Topology FDDI ring
Wiring Type IBM Type 1
Boot ROM Available (location unidentified)

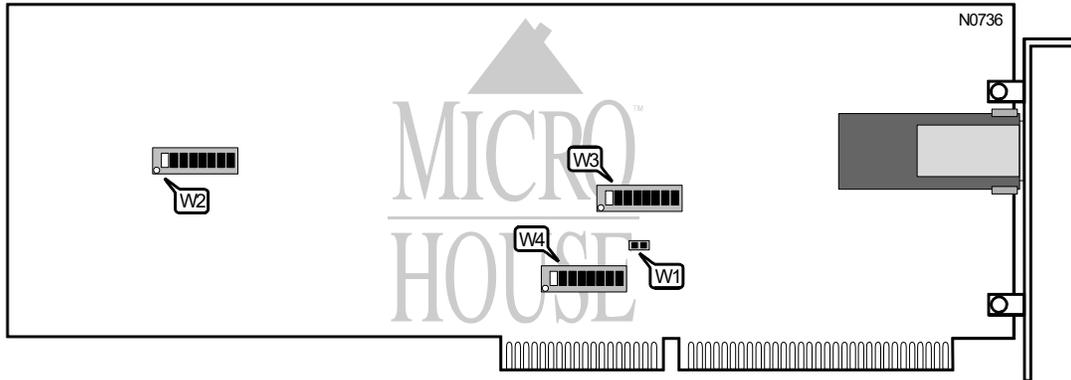

BOOT ROM				
Setting	W2/5	W2/6	W2/7	W2/8
Disabled	Off	Off	Off	Off

Note: Options for enabling the BOOT ROM are available in the form of a software package provided by the manufacturer.

DMA CONFIGURATION								
DMA	W3/1	W3/2	W3/3	W3/4	W3/5	W3/6	W3/7	W3/8
3	Off	Off	Off	Off	Off	Off	On	On
5	Off	Off	Off	Off	On	On	Off	Off
6	Off	Off	On	On	Off	Off	Off	Off
7	On	On	Off	Off	Off	Off	Off	Off

I/O ADDRESS SELECT			
Address	\ '2/1	\ '2/2	\ '2/3
100h	Off	Off	Off
120h	Off	Off	On
180h	Off	On	Off
1A0h	Off	On	On
220h	On	Off	Off
240h	On	Off	On
320h	On	On	Off
340h	On	On	On

Continued on next page . . .

... continued from previous page

INTERRUPT SELECT								
IRQ	W4/1	W4/2	W4/3	W4/4	W4/5	W4/6	W4/7	W4/8
2/9	Off	On						
3	Off	Off	Off	Off	On	Off	Off	Off
4	Off	Off	Off	Off	Off	On	Off	Off
5	Off	Off	Off	Off	Off	Off	On	Off
10	Off	Off	Off	On	Off	Off	Off	Off
11	Off	Off	On	Off	Off	Off	Off	Off
12	Off	On	Off	Off	Off	Off	Off	Off
15	On	Off						

SYSTEM TYPE	
Type	W1
Non-IBM compatible	Closed
IBM compatible	Open

FACTORY CONFIGURED SETTINGS	
Switch	Setting
W2/4	N/A