


Chapter 5: Jumper Settings
SYSKONNECT, INC.
SK-51XX (ISA)

NIC Type FDDI
Transfer Rate 100Mbps
Data Bus 16-bit ISA
Topology Ring
Wiring Type Shielded twisted pair (SAS)
 Fiber optic cable (MIC)
Boot ROM Available (location unidentified)

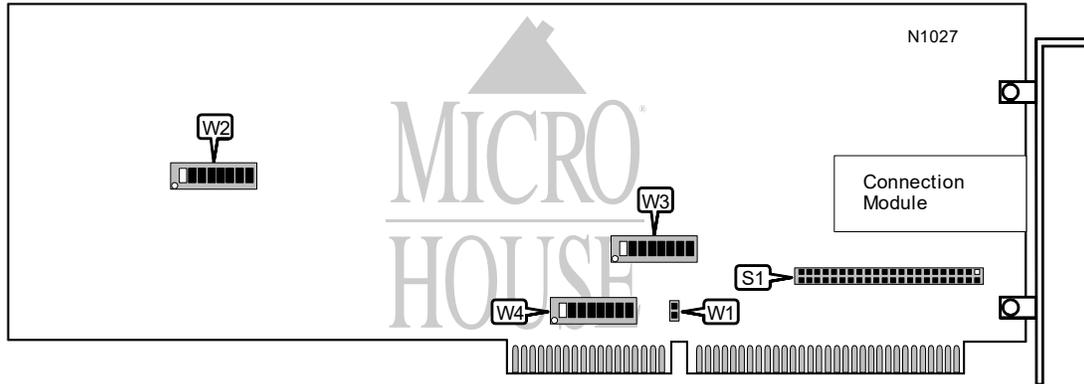

CONNECTIONS	
Purpose	Location
Daughter board connector	S1

BASE I/O ADDRESS SELECTION			
Address	W2/1	W2/2	W2/3
100h	Off	Off	Off
120h	Off	Off	On
180h	Off	On	Off
1A0h	Off	On	On
220h	On	Off	Off
240h	On	Off	On
320h	On	On	Off
340h	On	On	On

Continued next page...

THE NETWORK INTERFACE CARD TECHNICAL GUIDE
SYSKONNECT, INC.
SK-51XX (ISA)

... continued from previous page.

INTERRUPT SELECTION								
IRQ	W4/1	W4/2	W4/3	W4/4	W4/5	W4/6	W4/7	W4/8
IRQ2/9	Off	On						
IRQ3	Off	Off	Off	Off	On	Off	Off	Off
IRQ4	Off	Off	Off	Off	Off	On	Off	Off
IRQ5	Off	Off	Off	Off	Off	Off	On	Off
IRQ10	Off	Off	Off	On	Off	Off	Off	Off
IRQ11	Off	Off	On	Off	Off	Off	Off	Off
IRQ12	Off	On	Off	Off	Off	Off	Off	Off
IRQ15	On	Off						

DMA CHANNEL SELECTION								
Channel	W3/1	W3/2	W3/3	W3/4	W3/5	W3/6	W3/7	W3/8
DRQ/DACK3	Off	Off	Off	Off	Off	Off	On	On
DRQ/DACK5	Off	Off	Off	Off	On	On	Off	Off
DRQ/DACK6	Off	Off	On	On	Off	Off	Off	Off
DRQ/DACK7	On	On	Off	Off	Off	Off	Off	Off

BOOT ROM CONFIGURATION	
Select	W2/4
Enabled	Off
Disabled	On

ROM ADDRESS				
Address	W2/5	W2/6	W2/7	W2/8
DC000h	Off	Off	Off	On
DA000h	Off	Off	On	Off
D8000h	Off	Off	On	On
D6000h	Off	On	Off	Off
D4000h	Off	On	Off	On
D2000h	Off	On	On	Off
D0000h	Off	On	On	On
CE000h	On	Off	Off	Off
CC000h	On	Off	Off	On
CA000h	On	Off	On	Off
C8000h	On	Off	On	On
C6000h	On	On	Off	Off
C4000h	On	On	Off	On
C2000h	On	On	On	Off
C0000h	On	On	On	On

COMPATABILITY MODE CONFIGURATION	
Settings	W1
NON-IBM compatible	Open
IBM compatible	Closed