


U.S. ROBOTICS, INC. ALLEGRA 56

Card Type	Network Adapter
NIC Type	Frame relay
Maximum Onboard Memory	Unidentified
Boot ROM	Unavailable
Network Transfer Rate	56Kbps
Data Bus	16-bit ISA

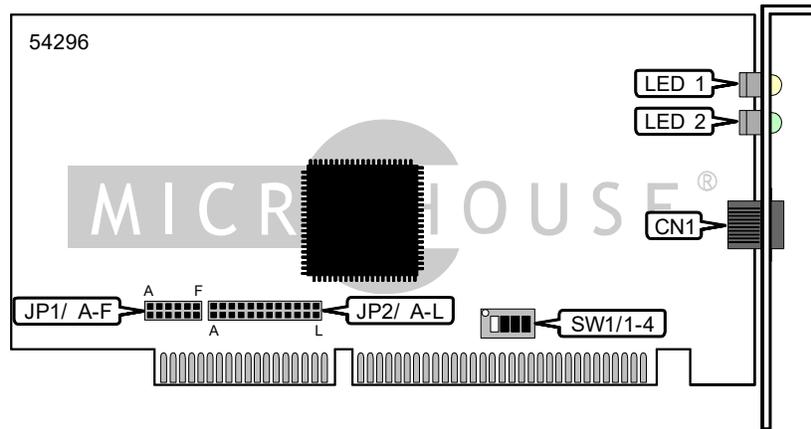

CONNECTIONS	
Function	Label
RJ-45 interface	CN1

DMA CHANNEL SELECTION						
Channel	JP2/A	JP2/B	JP2/C	JP2/D	JP2/E	JP2/F
0	Open	Open	Open	Closed	Open	Open
1	Open	Open	Open	Open	Closed	Open
3	Open	Open	Open	Open	Open	Closed
5	Open	Open	Closed	Open	Open	Open
6	Open	Closed	Open	Open	Open	Open
7	Closed	Open	Open	Open	Open	Open

DMA CHANNEL SELECTION (CONT.)						
Channel	JP2/G	JP2/H	JP2/I	JP2/J	JP2/K	JP2/L
0	Open	Open	Open	Closed	Open	Open
1	Open	Open	Open	Open	Closed	Open
3	Open	Open	Open	Open	Open	Closed
5	Open	Open	Closed	Open	Open	Open
6	Open	Closed	Open	Open	Open	Open
7	Closed	Open	Open	Open	Open	Open

Continued on next page. . .

... continued from previous page

BASE I/O ADDRESS SELECTION				
Setting	SW1/1	SW1/2	SW1/3	SW1/4
200h	On	On	On	On
220h	On	On	On	Off
240h	On	On	Off	On
260h	On	On	Off	Off
280h	On	Off	On	On
2A0h	On	Off	On	Off
2C0h	On	Off	Off	On
2E0h	On	Off	Off	Off
300h	Off	On	On	On
320h	Off	On	On	Off
340h	Off	On	Off	On
360h	Off	On	Off	Off
380h	Off	Off	On	On
3A0h	Off	Off	On	Off
3C0h	Off	Off	Off	On
3E0h	Off	Off	Off	Off

INTERRUPT SELECTION						
IRQ	JP1/A	JP1/B	JP1/C	JP1/D	JP1/E	JP1/F
IRQ5	Open	Open	Open	Open	Open	Closed
IRQ9	Open	Open	Open	Open	Closed	Open
IRQ10	Open	Open	Open	Closed	Open	Open
IRQ11	Open	Open	Closed	Open	Open	Open
IRQ12	Open	Closed	Open	Open	Open	Open
IRQ15	Closed	Open	Open	Open	Open	Open

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Yellow	Off	Normal operating state
LED1	Yellow	Blinking	Loopback test is occurring
LED2	Green	Off	Frame relay network link is broken
LED2	Green	Blinking	Frame relay link is established but unstable
LED2	Green	On	Frame relay network link is good