

ThinSoft

THINSOFT (USA) INC.

4770 San Pablo Avenue Unit A - Emeryville, CA 94608 - Phone (510) 450-0865: Fax (510) 450-0173

www.thinsoftinc.com

Buddy B-680 Premium User Manual

Document Version 1.1

Copyright © ThinSoft (USA) Inc. 2002

Buddy B-680 Premium User Manual

© Copyright 2002 ThinSoft (USA) Inc. All rights reserved.

ThinSoft (USA) Inc.
4770 San Pablo Avenue, Unit A
Emeryville, California 94608
U.S.A.
Fax: (510) 450-0173
Phone (510) 450 – 0865

This document is being furnished by ThinSoft (USA) Inc. for information purpose only to licensed users of the Buddy® software product. Efforts are made to ensure the accuracy of the information presented, but is subject to change without prior notice. Changes, if any, will be incorporated in future releases.

Buddy® are the registered trademark of ThinSoft (USA) Inc.

Other brand and product names are the trademarks or registered trademarks of the respective holders. Microsoft is a registered trademark and Windows, Windows 2000, Windows XP, are the registered trademark of the Microsoft Corporation.

IBM and PC/AT are the registered trademarks of International Business Machines Corporation.

No part of this document may be reproduced for commercial purposes unless prior permission is obtained from the copyright holder.

Visit our Web Site at <http://www.thinsoftinc.com>

Table of Contents

1. The Buddy B-680 Premium kit	5
2. Installation Overview	5
3. Hardware Guidelines	6
4. Buddy B-680 Premium Installation	7
4.1. Installing the PCI Video Adapter	7
4.1.1. Installing the Video Drivers for Windows 2000 Professional	9
4.1.2. Installing the Video Drivers for Windows XP Professional or Home Edition	9
4.2. Installing the USB Audio Hub	10
4.3. Installing the USB Keyboard	12
4.4. Installing the USB Mouse	13
5. Introduction to Buddy software	14
5.1. Installing the Buddy Software	14
5.2. Configuring the Buddy Station Using Configuration Wizard	16
5.3. Configuring the Buddy Station Manually	18
5.4. Logging onto the station automatically under Windows 2000 Professional	20
5.5. Logging onto the station automatically under Windows XP Professional or Home Edition	23
5.6. Using the Locator Buttons	25
5.6.1. Keyboard/Mouse Locator	25
5.6.2. Sound Device Locator	25
5.7. Using the Buddy Control Center	27
5.7.1. Station Mode	27
5.7.2. User Mode	27
5.7.3. Message Mode	29
5.7.4. Eventlog Mode	30
5.7.5. Menu Options	30
6. Logging onto the Computer for the First Time	33
7. Logging onto the Computer as a Different User	34
8. Shutting Down Windows in Windows 2000 Professional	35
9. Shutting Down Windows in Windows XP Professional or Home Edition	36
10. Sharing the Internet Connection in Windows 2000 Professional	37
10.1. Simultaneous Independent Sharing	37
10.2. Setting up Dial-up Connection	37
11. Sharing the Internet Connection in Windows XP Professional or Home Edition	38
11.1. Simultaneous Independent Sharing	38
11.2. Setting up Dial-up Connection	38
12. Adding Software or Hardware	39
13. Problem Solving	40

13.1. General Guidelines	40
14. Updating Buddy	41
15. Technical Support	42

Congratulations on your purchase of the Buddy B-680 Premium kit, with which you can add an additional PC workstation to your existing PC.

1. The Buddy B-680 Premium kit

- i) 4-port Buddy USB Audio Hub
- ii) USB and Video Combo Cable (4.5 meters)
- iii) AC-DC 5V Power Adapter
- iv) Buddy B-680 Utility CD
- v) PCI Video Adapter
- vi) Buddy B-680 Utility Leaflet

Make sure all of the above items are included in your Buddy B-680 Premium kit. If anything is missing, please contact the shop where you purchased this kit or your nearest Buddy dealer.

2. Installation Overview

Installation is simple. By following these steps, a two-user system should take less than 20 minutes to set up. Each step is explained in detail in the following pages.

Step 1.

Install the additional display adapter.

Step 2.

Connect the USB Audio Hub and install the Windows drivers. Check the status of the installed device to ensure that it is correctly installed.

Step 3.

Connect the USB mouse and keyboard and install the Windows drivers. Test the hardware to ensure that they work properly with Windows.

Step 4.

Install the Buddy software.

Terminology

The original computer display, keyboard and mouse are used by one user. This user is called the *host*. A display, USB mouse and USB keyboard are added for the additional user. This user is called the *station*.

3. Hardware Guidelines

CPU

A Pentium II 333 MHz processor is the minimum recommendation. For best performance, a Pentium III 450 MHz or faster is suggested. Equivalent AMD processors are also supported. The computer must have at least one available PCI slot and USB port.

- Minimum**
 - Pentium II 333 MHz Processor
- Recommended**
 - Pentium III Processor at 450 MHz or faster

System Memory

192 Megabytes of memory is the minimum requirement for 2 users.
64 MB of additional memory is recommended for each station.

- Memory Requirement**
 - Minimum**
 - 192 MB (One Host and One Station)
 - Recommended**
 - 256 MB or more
- Additional User Memory Requirement**
 - Minimum**
 - 64 MB per additional Station
 - Recommended**
 - 128MB or more

Windows Operating System

An IBM PC/ AT or compatible installed with Windows 2000 Professional or Windows XP (Professional or Home Edition)

Station Hardware

Each Station requires a PCI video card, USB Audio Hub (both are included in the Buddy B-680 Premium kit), a SVGA monitor, a USB keyboard and a USB Mouse. If sound is required, a pair of audio speakers will be required.

- Display**
 - PCI video card
 - SVGA monitor
- USB Audio Hub**
 - USB Keyboard
 - USB Mouse
 - Speaker


4. Buddy B-680 Premium Installation

Before installing the Buddy software, you must first install the PCI video card, SVGA monitor, USB Audio Hub, USB mouse and USB keyboard.

4.1. Installing the PCI Video Adapter

Step 1.

Install the PCI video card.

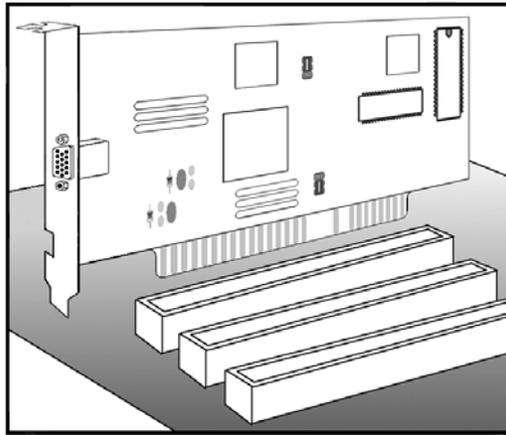

- (i) Ground yourself by touching the metal chassis of the computer with your fingers.
- (ii) Shut down your computer, switch off the power and unplug it from the electrical outlet. Remove the cover from the computer and locate an available PCI slot.
- (iii) Remove the PCI video card from its anti-static bag, included in the Buddy B-680 Premium kit.
- (iv) Insert the PCI video card into the PCI slot gently until it sits securely into place. Secure the chrome bracket of the PCI video card to the computer. Ensure that no other cards have been accidentally pushed out of their slots.
- (v) Put the case back onto your computer.
- (vi) Connect one end of the video cable of the supplied USB/VGA combo cable to the VGA connector of the PCI video card and the other end to the second monitor.
- (vii) Plug the power cable back to the electrical outlet before power on your computer.

Step 2.

If the Host PC has a PCI video add-on card installed, kindly refer to section (i).

If the Host PC has an AGP video add-on card installed or integrated in the system motherboard, kindly refer to section (ii).

- (i) With the PCI video card installed into the Host PC, upon the power-on of the Host PC, boot-up display should appear on the Host PC's monitor screen. Otherwise, swap the PCI-bus location between the two PCI VGA add-on cards.
- (ii) With the PCI video card installed into the Host PC, upon the power-on of the Host PC, boot-up display should appear on the Host PC's monitor screen. Otherwise, go into the Host PC's BIOS/CMOS Setup to select the option to boot up from AGP VGA first.

Eg. The following are examples where different types of PCs have different options to boot from the AGP VGA first. If you are not sure if your PC has such an option, kindly refer to your PC's documentation or contact your PC Manufacturer's Technical Support.

- a. Under the BIOS/CMOS Setup options selection, select "Integrated Peripherals"
→ "Init Display First", then select the option "AGP".
- b. Under the BIOS/CMOS Setup options selection, select "BIOS Features Setup"
→ "VGA Boot from", then select the option "AGP".
- c. Under the BIOS/CMOS Setup options selection, select "Integrated Peripherals"
→ "Init Display First", then select the option "Enabled".

Step 3.

Log in to Windows as the Administrator or User with Administrator's rights.

Step 4.

Windows will now detect the new PCI video card and ask for the Windows disk (or driver disk supplied with the PCI video card). Refer to the instructions under the section "**Installing the Video Drivers...**" to direct you through this portion on the installation.

Note: In some cases, Windows may detect the new PCI video card and install with the built-in Windows drivers automatically without prompting for the Windows disk (or driver disk supplied with the PCI video card).

4.1.1. Installing the Video Drivers for Windows 2000 Professional

Follow the instructions below for installation of the video drivers if your Host PC is running Windows 2000 Professional.

Step 1.

You should see a dialogue box similar to the one below. Click on the “Cancel” button to quit from the Wizard.



Step 2.

Refer to the instructions under the section “**Installing the Buddy Software**” on the installation of the Buddy software and video drivers.

The Buddy software should only be installed *after* the USB Audio Hub, Speaker, USB mouse and USB keyboard have been successfully installed and tested. Refer to the instructions under the sections “**Installing the USB Audio Hub**”, “**Installing the USB Keyboard**” and “**Installing the USB Mouse**” to direct you through this portion on the installation.

4.1.2. Installing the Video Drivers for Windows XP Professional or Home Edition


Windows XP will detect the new PCI video card and install with the built-in Windows drivers automatically without prompting for the Windows disk (or driver disk supplied with the PCI video card).

Ensure that the video adapter is correctly installed by checking the status of the installed device.

On the Windows desktop, select Start menu button => Settings => Control Panel => System => Hardware => Device Manager.


Make sure that the following item is listed in the “Device Manager” window.

- “RADEON 7000 RADEON VE Family (Microsoft Corporation)” under “Display Adapters”.

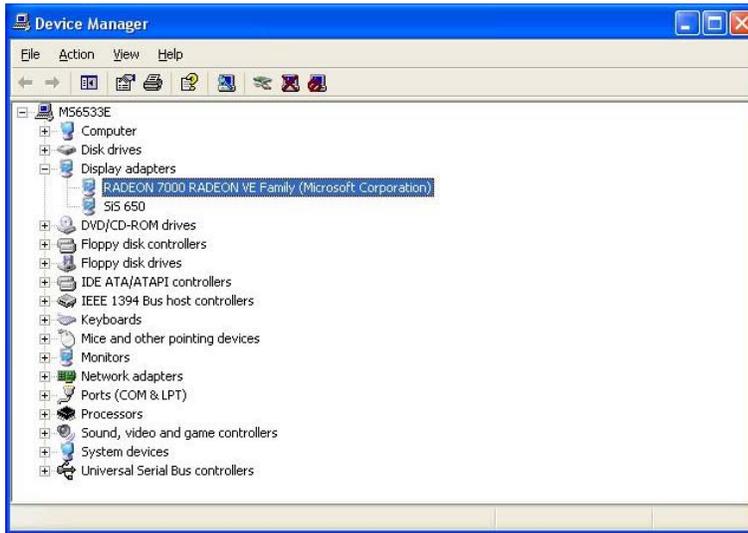

4.2. Installing the USB Audio Hub

Please be sure to start up Windows before making connection for the first time.

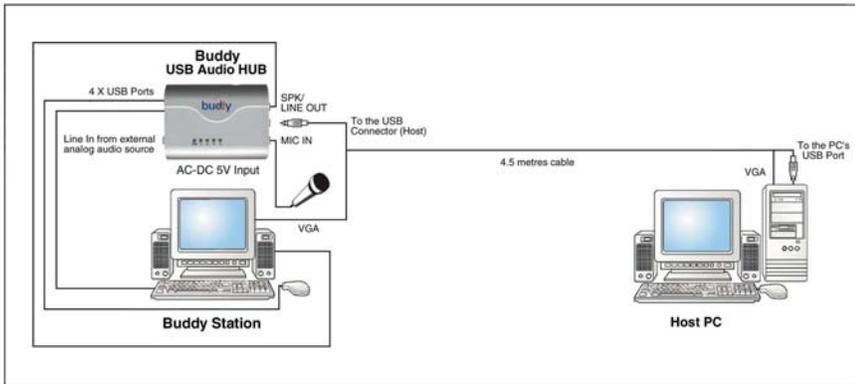

Step 1.

Start up Windows and log in as the Administrator or User with Administrator's rights. Closed all active applications.

Step 2.

Connect a Speaker to the Line-out/Speaker connector (labeled “SPK”) of the USB Audio Hub and power on the speaker (refer to the Speaker's User Manual for details).

Step 3.

Connect a Microphone to the Microphone-in connector (labeled “MIC”) of the USB Audio Hub, if applicable.

Step 4.

Connect an External Audio device to the Line-in connector (labeled “Line In”) of the USB Audio Hub, if applicable.

Step 5.

Connect the AC-DC 5V Adapter (included in the Buddy B-680 Premium kit) to the AC Main and the USB Audio Hub DC Input connector; power on the AC-DC 5V Adapter.

Step 6.

Connect one end of the USB cable of the supplied USB/VGA combo cable to the USB Audio Hub’s upstream connector (labeled “Host”) and the other end to an available USB port on the PC.

“Add New Hardware Wizard” will appear and Windows drivers for the USB Hub and USB audio will be automatically installed.

Step 7.

Ensure that the USB audio works by configuring the audio settings on the Host PC and playing the audio file from Windows Media Player.

On the Windows desktop, select Start Menu Button (on the Panel) => Settings => Control Panel => Sound and Audio Devices. Click on the Audio tab and select the respective “USB Audio” as default device under Sound Playback. Next, click on the “Apply” button.



Use Windows Media Player to play a file, you should now be able to hear the sound playing from the speaker connected to the USB Audio Hub.

Step 8.

After verifying that the USB audio is working properly, you need to configure the audio settings on the Host PC to the audio device that is originally configured.

On the Windows desktop, select Start Menu Button (on the Panel) => Settings => Control Panel => Sound and Audio Devices. Click on the Audio tab and select the original audio device as the default

device under Sound Playback. Next, select the option "Use only default devices" and click on the "Apply" button.


Step 9.

Ensure that the USB Hub is correctly installed by checking the status of the installed device.

On the Windows desktop, select Start menu button => Settings => Control Panel => System => Hardware => Device Manager.

Make sure that the following items are listed in the "Device Manager" window.

- "Generic USB Hub" and "USB Composite Device" under "Universal Serial Bus controllers".
- "USB Audio Device" under "Sound, Video and Game Controllers".
- "HID-Compliant Consumer Control Device" and "USB Human Interface Device" under Human Interface Devices.

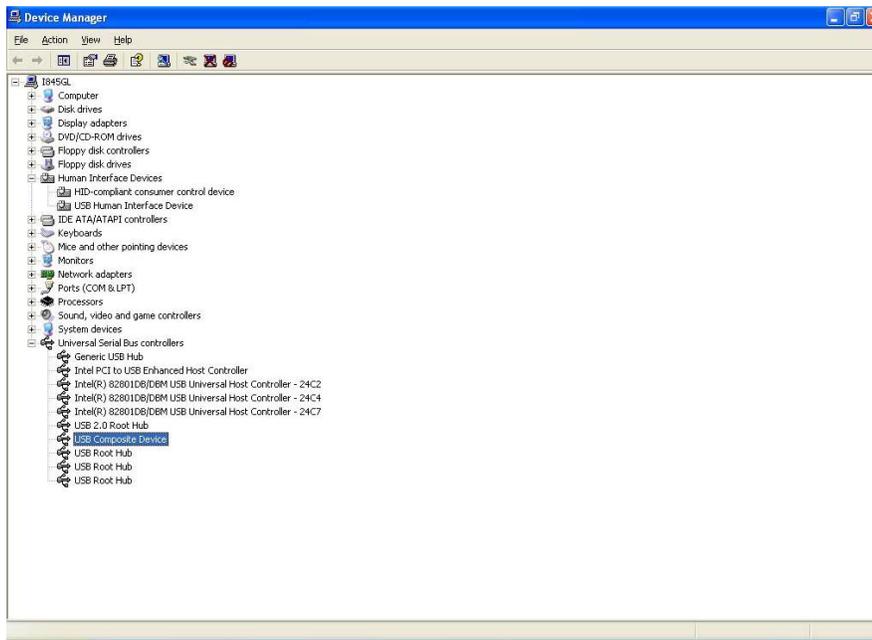

The USB Audio Hub will be used to connect the mouse and keyboard for the Buddy station. Other USB devices such as microphone can be connected as well. In order to simplify installation, it is best if all peripheral devices for a Buddy station are plugged into a single USB hub. One hub is then used for each station. Connecting in this manner will make cabling easier and will assist in automating station configuration using the Configuration Wizard.

4.3. Installing the USB Keyboard

Step 1.

Start up Windows and log in as the Administrator or User with Administrator's rights. Closed all active applications.

Step 2.

Connect a USB Keyboard to one of the available USB Audio Hub's downstream port.

Windows will now detect the USB keyboard and may ask for Windows disk (or USB driver disk supplied with the USB keyboard). It is essential that no “third party” drivers are installed for the keyboard. Buddy software only supports the Microsoft native (“built-in”) USB keyboard drivers.

It is possible at this point that Windows has already detected and installed the new hardware properly and may not request any additional drivers.

Step 3.

The USB keyboard can be tested by its effect on the host screen.

- You may verify the working status of the keyboard by pressing the Windows key. The start menu should be displayed.
- If the keyboard does not work properly, please contact the keyboard manufacturer for assistance.

4.4. Installing the USB Mouse

Step 1.

Start up Windows and log in as the Administrator or User with Administrator’s rights. Closed all active applications.

Step 2.

Connect a USB mouse to one of the available USB Audio Hub's downstream port.

Windows will now detect the USB mouse and may ask for Windows disk (or USB driver disk supplied with the USB mouse). It is essential that no “third party” drivers are installed for the mouse. Buddy software only supports the Microsoft native (“built-in”) USB mouse drivers.

It is possible at this point that Windows has already detected and installed the new hardware properly and may not request any additional drivers.

Step 3.

The USB mouse can be tested by moving it around and making sure that the mouse pointer (as seen on the monitor) moves in the direction according to the USB mouse movement.

- You may verify the working status of the mouse by moving it. The mouse cursor should move.
- **If the mouse does not work properly, please contact the mouse manufacturer for assistance.**

If your Host PC is running Windows XP, the PCI video card, monitor, USB Audio Hub, Speaker, USB mouse and USB keyboard should be working properly at this point of time. You may now proceed to install the Buddy software.

If your Host PC is running Windows 2000 Professional, make sure that the USB Audio Hub, Speaker, USB mouse and USB keyboard are working properly before the Buddy software is installed.

5. Introduction to Buddy software

Product Description

Buddy is the software that allows multiple users to simultaneously and independently share a personal computer running Windows 2000 Professional, Windows XP Professional or Home Edition.

Additional video cards, monitors, USB-Audio Hub, mice, keyboards and audio speakers can be installed to support up to four additional users.

Manufacturer's Notice

The Buddy allows multiple users to simultaneously and independently share the same hardware and software on a single Personal Computer. Some software is licensed for use on a single computer while other software may be licensed for single or multiple users. It is the responsibility of the Buddy purchaser/user to read and comply with the licensing agreements of any software that may be used on a Buddy Station.

5.1. Installing the Buddy Software

The Buddy software should only be installed *after* the hardware has been successfully installed and tested.

If your Host PC is running Windows XP, the PCI video card, monitor, USB Audio Hub, Speaker, USB mouse and USB keyboard should be working properly at this point of time.

If your Host PC is running Windows 2000 Professional, make sure that the USB Audio Hub, Speaker, USB mouse and USB keyboard are working properly.

You are now ready to install the Buddy software.

Step 1.

- Double-click on the My Computer icon. Double-click on the D: drive icon. Double-click on the Buddy folder. Double-click on the Setup icon (the one with the picture of a computer monitor with a box in front of it).
Assumption: Your CD-ROM drive designator is D:
- Follow the instructions on the screen.
- Depending on what Windows options have already been installed, on some systems the Buddy installation may require additional files from the Windows CD so be sure to have the Windows CD handy when installing Buddy.
- You should see a screen that looks like the one below during the software installation. Ensure that you have checked the box to run the Buddy Station Configuration Wizard after system reboots.




- Restart the computer after successfully installing the Buddy software and video drivers (only applicable to Windows 2000 Professional).

NOTE: For Windows 2000 Professional systems, your computer will reboot twice. This is normal while Buddy setup is configuring drivers.

- Follow the instruction on the screen. Click OK to proceed with the Configuration Wizard.
- Select OK with the Keyboard you wish to use at the respective station.
- If prompted, click OK with the Mouse you wish to use at the station.
- When the Configuration Wizard is completed, you will be prompted to restart Windows. Click OK.

Step 2.

After the system reboots, click on Start\Programs\Buddy to launch Buddy Control Center. You should see a screen similar to the one below.

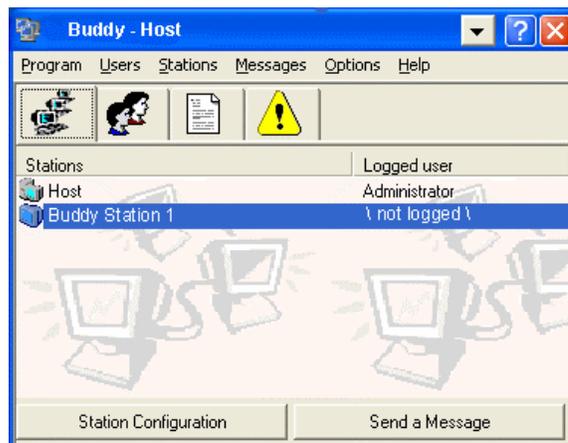


Congratulations! You have now fully installed the Buddy software and configured the system.

5.2. Configuring the Buddy Station Using Configuration Wizard

If you have not run the Buddy Station Configuration Wizard during the software installation, or if your hardware configuration has changed, you can still run the Configuration Wizard from the Buddy Control Center.


Step 1.

Double click on the **Buddy** icon to open Control Center. On the opening screen, click on **STATION CONFIGURATION**.

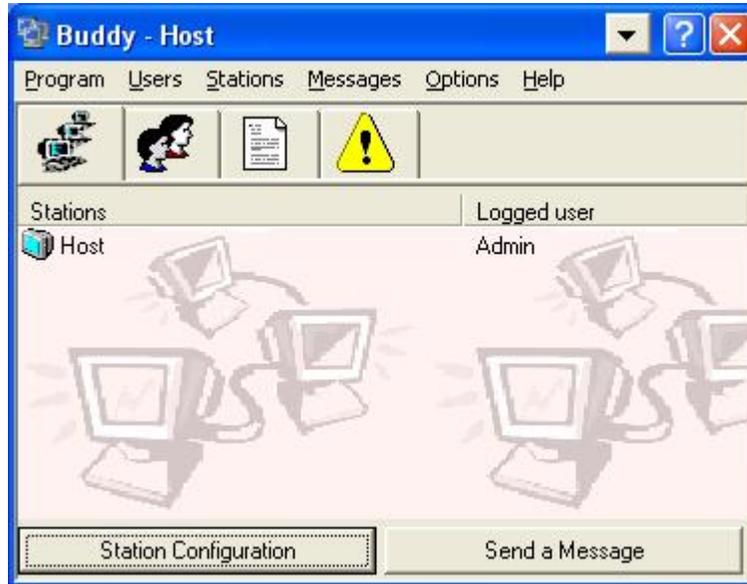

Step 2.

The “Configuration Wizard” feature enables Buddy to auto-assign the USB mice and keyboards to their respective workstations. To auto-assign the USB audio speakers, you need to connect the peripherals (USB mouse, keyboard and speakers) of each workstation to its USB Hub respectively. Click on **CONFIGURATION WIZARD**.

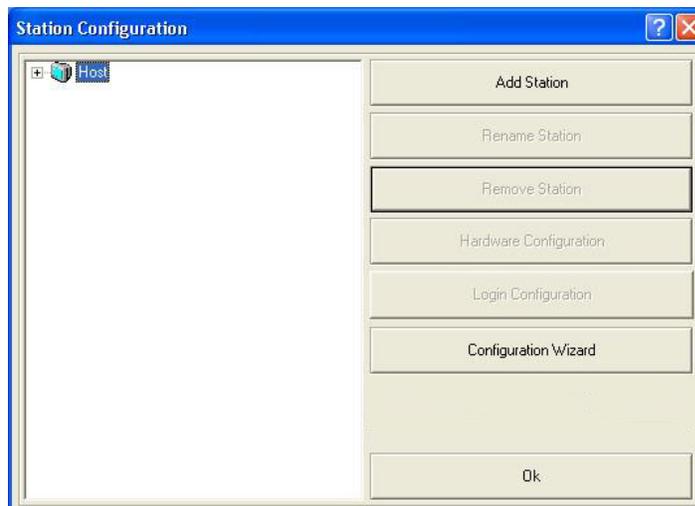

Step 3.

You should see a window similar to the one below. Click OK to disable Buddy, reboot the system, and start the Configuration Wizard.



Step 4.

Click OK to reboot the computer.



Step 5.

- Follow the instruction on the screen. Click OK to proceed with the Configuration Wizard.
- Select OK with the Keyboard you wish to use at the respective station.
- If prompted, click OK with the Mouse you wish to use at the station.
- When the Configuration Wizard is completed, you will be prompted to restart Windows. Click OK.

5.3. Configuring the Buddy Station Manually

For most Buddy installations, running the Configuration Wizard is sufficient for configuring the system. Optionally, you can configure the system manually, or you can use manual configuration to change the hardware assignments created by the Configuration Wizard. To assign the hardware to each workstation manually,


Step 1.

Double click on the **Buddy** icon to open Control Center. On the opening screen, click on **STATION CONFIGURATION**.



Step 2.


- You should see a window similar to the one below. Click on **ADD STATION**.

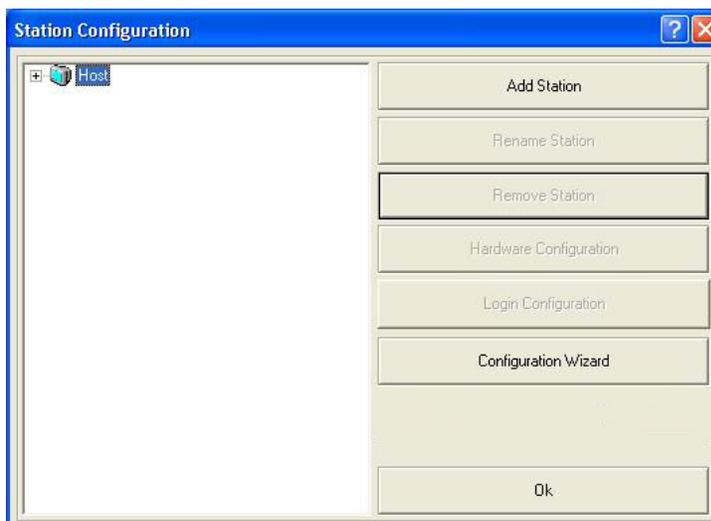


- Rename the station or leave the name as “Buddy Station”. You can also change the name later. Click **OK**



- Double click on **BUDDY STATION**. Click on the “Hardware” option to highlight it.

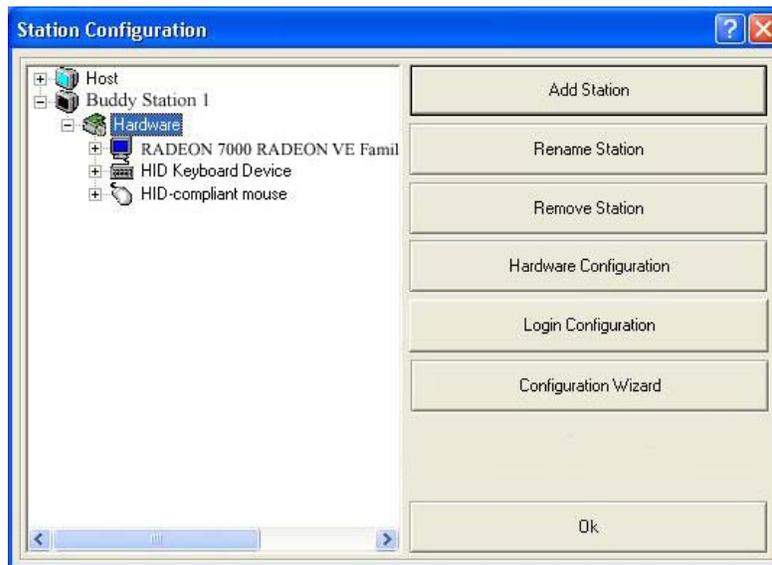

- Click **HARDWARE CONFIGURATION**. Now select the hardware to be used for station.

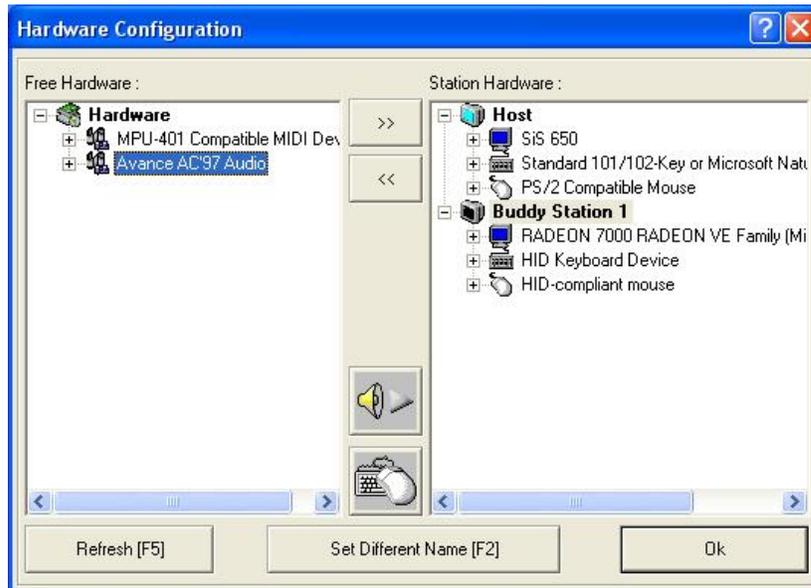

- ❖ Note: The display, mouse and keyboard will already have been selected for the station. Each station must have a video card, mouse and keyboard. In addition, audio, joystick or other hardware may be assigned.
- ❖ Note: Some computers equipped with an Intel 810/815 built-in display adapter do NOT have a BIOS option to force that adapter to be the primary display and will need to assign the Intel 810/815 display adapter to the station and use the added PCI adapter as the host display.
- To add a piece of hardware to a station, highlight the item by clicking on it in the “Free Hardware” window, then click on the “>>” button. You will then see the hardware appear in the “Station Hardware” window.
- To remove a piece of hardware from a station, click on the item in the “Station Hardware” window. Click on the “<<” button, and it will move from the “Station Hardware” to the “Free Hardware” window.
- When the station hardware is configured correctly, click on “OK”. This will return you to the “Station Configuration” windows. Click on “OK” again.
- When prompted to restart Windows, click on “OK”.



USING THE LOCATOR BUTTONS – Please see next page

Step 3.

After the computer has rebooted

- The Buddy station is ready for use.
- Double click on **BUDDY** icon to open control center.

5.4. Logging onto the station automatically under Windows 2000 Professional

The “Login Configuration” feature enables user to specify the username and password to use at an individual Buddy station to automatically log on the station. User can also specify a program to run automatically.

The Host station is managed using the TweakUI program, downloadable from <http://www.microsoft.com/networkstation/downloads/PowerToys/Networking/NTTweakUI.asp>


Step 1.

Double click on the **Buddy** icon to open Control Center. On the opening screen, click on **STATION CONFIGURATION**.



Step 2.


You should see a window similar to the one below. Click on **LOGIN CONFIGURATION**.

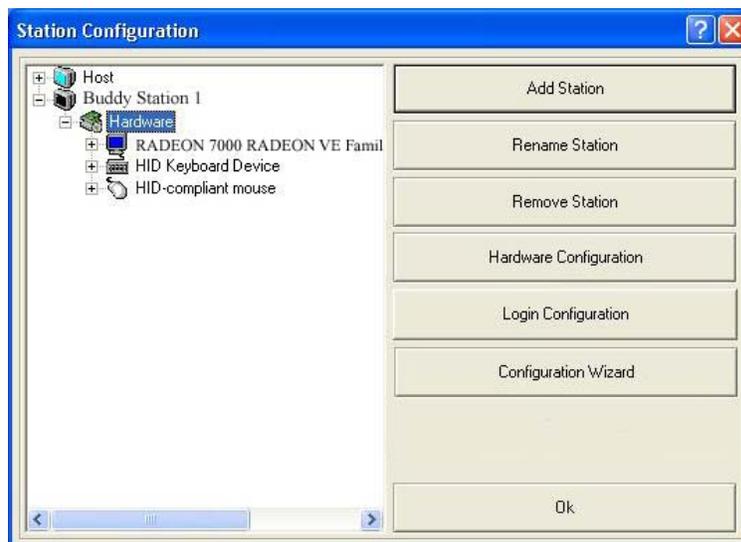

Step 3.

Enter the default username and password to use at an individual Buddy station and deselect the “Always prompt for password” check box. You can also specify a program to run automatically under the **Initial Program** and **Working Directory**.

Note: The usefulness of setting the working directory will depend on the application being run.

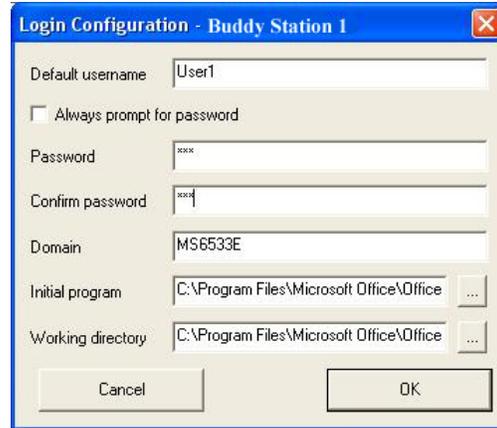

Step 4.

- On the Windows desktop, select Start menu button => Settings => Control Panel => Users and Passwords.
- Click the Advanced tab.
- In Secure Boot Settings, deselect the “Require users to press Ctrl+Alt+Delete before logging on” check box.
- Reboot the computer.



5.5. Logging onto the station automatically under Windows XP Professional or Home Edition

The “Login Configuration” feature enables user to specify the username and password to use at an individual Buddy station to automatically log on the station. User can also specify a program to run automatically.

The Host station is managed using the TweakUI program, downloadable from <http://www.microsoft.com/windowsxp/pro/downloads/powertoys.asp>


Step 1.

Double click on the **Buddy** icon to open Control Center. On the opening screen, click on **STATION CONFIGURATION**.



Step 2.


You should see a window similar to the one below. Click on **LOGIN CONFIGURATION**.

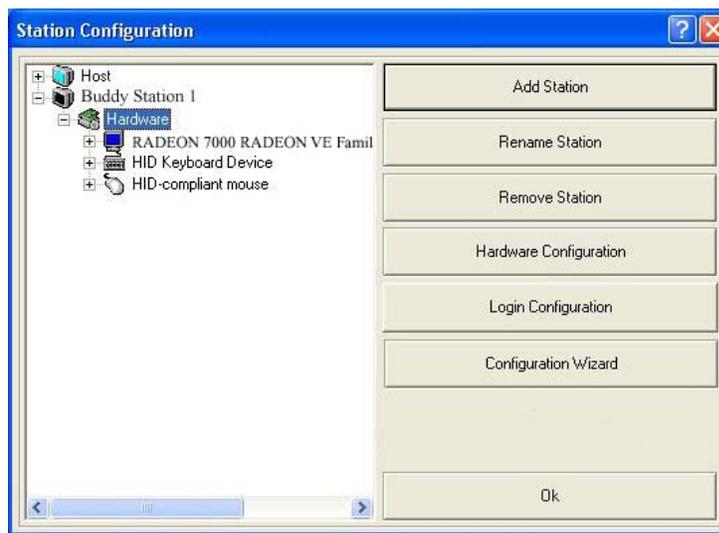

Step 3.

Enter the default username and password to use at an individual Buddy station and deselect the “Always prompt for password” check box. You can also specify a program to run automatically under the **Initial Program** and **Working Directory**.

Note: The usefulness of setting the working directory will depend on the application being run.

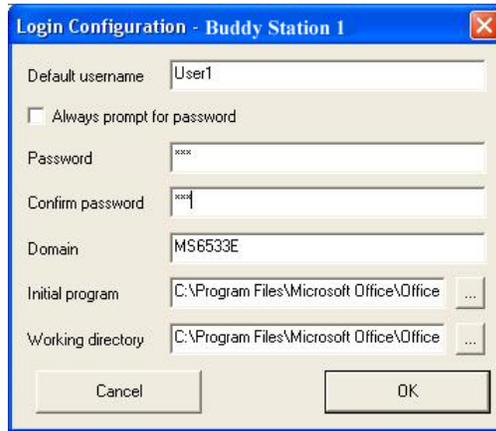

Step 4.

The step is only applicable if your computer is part of a network domain. You must be logged on as an administrator or a member of the Administrators group on the computer in order to complete this procedure.

- On the Windows desktop, select Start menu button => Settings => Control Panel => User Accounts.
- Click the Advanced tab.
- In Secure logon, deselect the “Require users to press Ctrl+Alt+Delete” check box.
- Reboot the computer.



5.6. Using the Locator Buttons

Locator Buttons is only applicable if you are configuring the system manually, or using the manual configuration to change the hardware assignments created by the Configuration Wizard. If there is more than one Buddy station it can be confusing determining which mouse, keyboard or sound device should be assigned to each station. Using the locator buttons can help ease this confusion.


- ❖ Note: To use the locator buttons, Buddy must be disabled. Click on Start/ Program Files/ Buddy/ Options/ Set Configuration/ Deactivate Buddy to disable it.

Make sure Buddy is enabled after devices have been assigned to each station. Click on Start/ Program Files/ Buddy/Options/ Set Configuration/ Activate Buddy to enable it.

5.6.1. Keyboard/Mouse Locator



To locate a particular peripheral, first click the keyboard/mouse locator button and then press either a key on any USB keyboard or a button on any USB mouse. The display in the Hardware Configuration screen will indicate which keyboard or mouse has been activated. Once identified, using the Set Different Name utility will make organizing the peripherals easier.

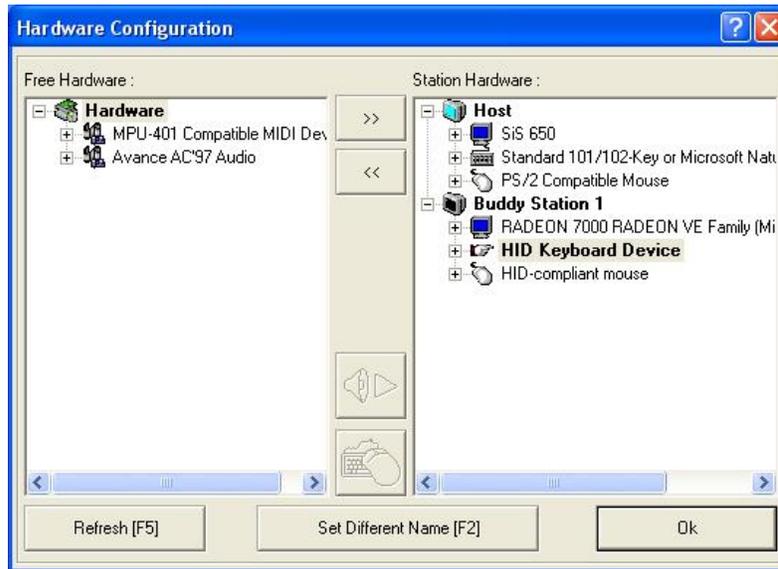

In the above picture, the station1 keyboard is being indicated.

5.6.2. Sound Device Locator



To use the Sound Device Locator, first click to highlight a sound device in the Hardware Configuration screen which will cause the Sound Locator button to un-gray. Clicking the locator button will cause a sound to play from the speakers connected to that device.

- ❖ Note: The Sound Locator is designed primarily for locating USB sound devices though it may work with mainboard integrated sound devices or other PCI sound devices as well.

5.7. Using the Buddy Control Center

The Buddy Control Center can be used to manage Buddy hardware and software options. It allows you to manage users on the system. It also provides tools to assist you in troubleshooting any problems.

The Control Center runs in four modes – Stations, Users, Messages and Eventlog. The four buttons are used to select the mode. Each mode has a different “face” designed to assist you to do your work.



5.7.1. Station Mode

When the Control Center starts, it is in Station mode. If you are in another mode, you can select Station mode by clicking on the Station button



Station mode is used to configure a station and send a message to a station.



5.7.2. User Mode


User mode is selected by clicking on the user button.



User mode is used to add, remove or customize each user's profile.



Clicking on the Users Configuration option invokes the Windows User Applet that is used to add, delete or customize user profile settings.

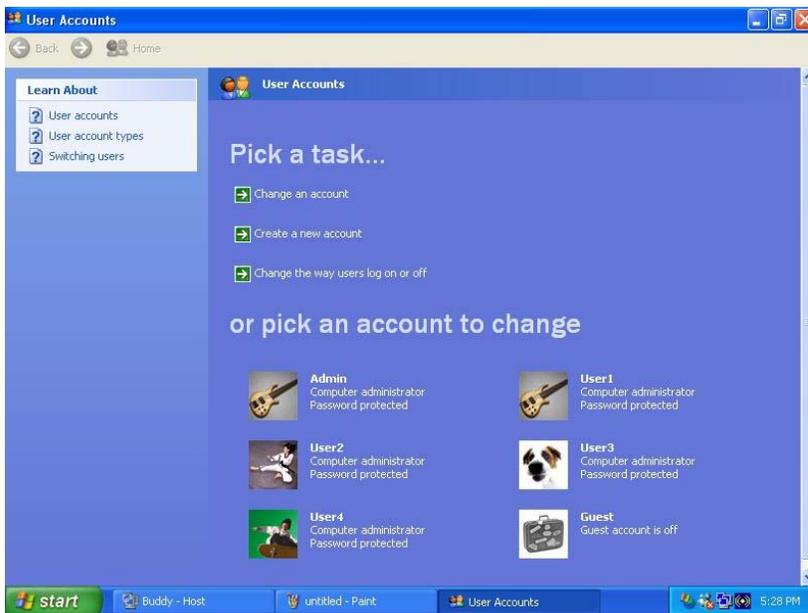

❖ Note: You must have the administrative privileges in order to use the Windows User Applet.

For more information regarding the Windows User Applet, please see Windows help. Any changes made to the user profiles will not take effect until the system is restarted.


5.7.3. Message Mode

Message Mode is selected by clicking on the message button




Message mode is used to send messages to another user or to check messages.

Clicking the Send a Message option produces the message box.

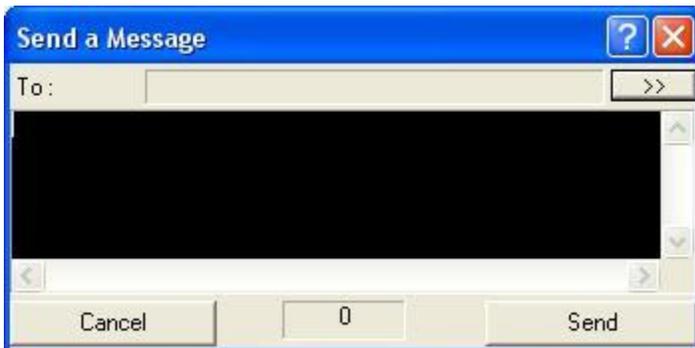

Clicking the arrow:  allows for selecting where the message will be sent.

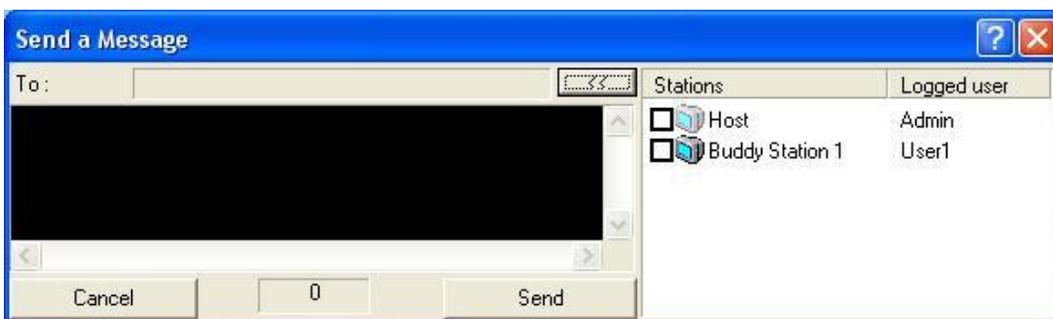

5.7.4. Eventlog Mode


Eventlog mode is selected by clicking on the eventlog button



Eventlog mode is used to display eventlog messages for troubleshooting purposes. Only events relating to the Buddy software are displayed.

5.7.5. Menu Options


Additional options are available from the menu bar at the top of the Control Center.

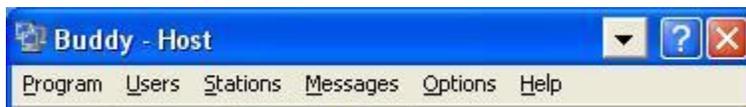

The **Program** menu allows for exiting the Buddy Control Center or for shutting down Windows.



The **Users** menu has several features.

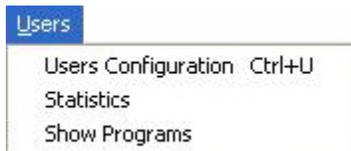

Users Configuration brings up the Windows User Applet.


Statistics displays a utility that monitors system resource use.

Show Programs displays all tasks running on both host and all stations.

The **Stations** menu allows entry into Station Mode to configure a station.



The **Messages** menu allows access to Message Mode as well as to Eventlog Mode.

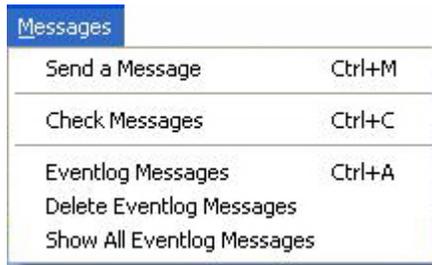


The **Options** menu can be used to select different languages for the Buddy Control Center if desired.



The **Set Configuration** selection on the **Options** menu is used to disable the Buddy software for testing purposes. It is also recommended that the Buddy software be disabled prior to any hardware changes are made to the system. It is also necessary to disable the Buddy software (and reboot) prior to either uninstalling Buddy or before updating the Buddy software to a newer version.


When selected, the **Set Configuration** option presents the following options

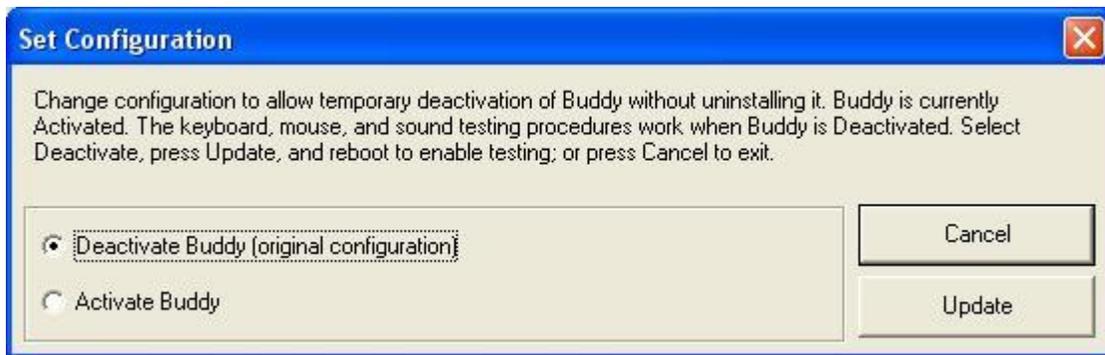

A reboot is required before either selected option will take effect.

The **Set Secure Shutdown** selection on the **Options** menu is used to modify Windows shutdown availability. It can be configured to allow any user to shutdown the system or restrict the shutdown option to users with Administrator privileges. Restricting shutdown to Administrators requires a user with administrator privileges to log in to shutdown the system.

When selected, the **Set Secure Shutdown** option presents the following options

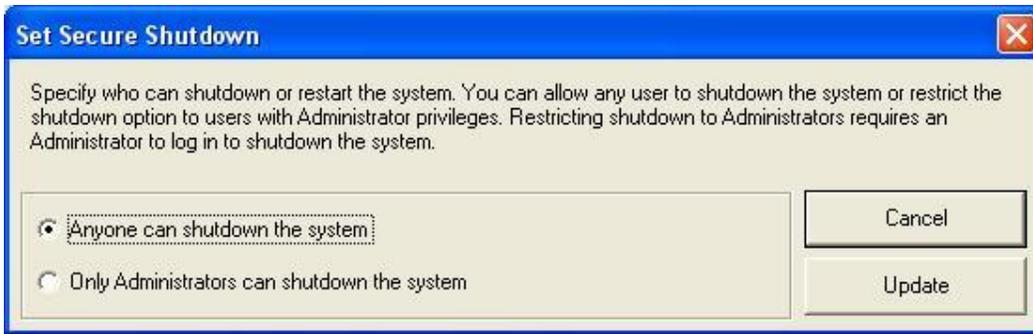

The Security Policy Settings/ User Accounts in Windows need to be configured accordingly when the option “Only Administrators can shutdown the system” is selected.


To configure the Security Policy Settings in Windows 2000 Professional, follow the instructions under the section “Shutting Down Windows in Windows 2000 Professional”.

To change the User Accounts Settings in Windows XP Professional or Home Edition, follow the instructions under the section “Shutting Down Windows in Windows XP Professional or Home Edition”.

A reboot is required before either selected option will take effect.

The **Set Shutdown Messages** selection on the **Options** menu allows users to customize the shutdown message sent to the Buddy stations when Start/Shutdown is selected.

When selected, the **Set Shutdown Messages** option presents the following options

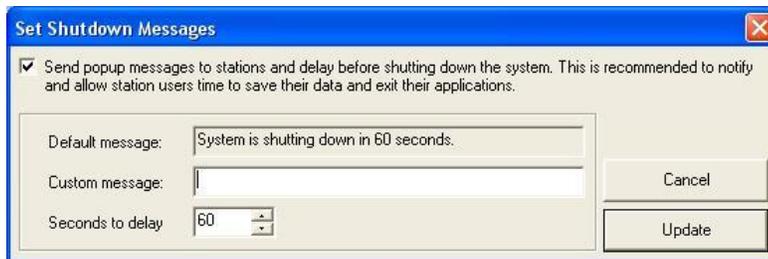

The **Set Remote Desktop** selection on the **Options** menu allows other users to connect remotely to the computer with Remote Desktop Protocol (RDP) client software.

When selected, the **Set Remote Desktop** option presents the following options



A reboot is required before either selected option will take effect.

The **Help** menu provides the Buddy help Index as well as Buddy version information.

6. Logging On to the Computer for the First Time

Windows Login

Step 1

Type in the name in the user name box that is created in Windows User Applet.

For more information regarding the Windows User Applet, please see Windows help.

Step 2

Press the tab key and type in the password of the user name that is created in Windows User Applet.

Step 3

Click on the “OK” button.

Note: You can create as many names and passwords as needed in the Windows User Applet. There is no limit on the number of users that may be created.

7. Logging On to the Computer as a Different User

Users may log onto the Computer console or any Buddy Station under their own name and password to access their own Windows desktop.

Step 1

Click on the Windows “Start” button.

Step 2

1. Click on the “Shutdown...” menu option.
2. Click on the “Log Off” menu option.
3. Click on “OK” to log off.

Step 3

Follow the instructions in “Logging Onto the Computer for the First Time”.

8. Shutting Down Windows in Windows 2000 Professional

The Security Policy Settings in Windows 2000 Professional allow the Administrator to control certain user's privileges, as well as control certain actions allowed for the user.

Administrator can modify numerous security-relevant settings, including users' rights to shut down Windows, by configuring the Local Security Policy.

To view and implement security policy on the computer, you must have Administrator rights to the computer. Administrators can use the following Windows 2000 Professional tools to view and assign user rights for the computer:

1. Click **Start**, and then click **Control Panel** under **Settings**.
2. Double-click **Administrator Tools**.
3. Double-click **Local Security Policy**.
4. Click **Security Settings**, and then click **Local Policies**.
5. In the console tree, click **User Rights Assignment**.
6. In the detail pane, double-click the user right you want to change.
7. The default security settings for Windows 2000 can be described by summarizing the permissions granted to four default groups (Administrators, Power Users, Users and Backup Operators) and three special groups. To assign the user rights, put a check in the box next to the user group. In this case, the right in question is **Shut down the system**.

9. Shutting Down Windows in Windows XP Professional or Home Edition

To restrict the shutdown option to users with Administrator privileges, the User Accounts in Windows need to be configured accordingly.

To change the User Accounts Settings in Windows XP Professional or Home Edition:

1. Click **Start**, and then click **Control Panel**.
2. Double-click **User Accounts**.
3. Pick and click on an account to change.
4. Click on the option “**Change the Account Type**”.
5. Select the option “ Limited”, “Standard user” or “Restricted user” and apply the change.
6. Reboot the system.

10. Sharing the Internet Connection in Windows 2000 Professional

10.1. Simultaneous and Independent Sharing

Two people can simultaneously and independently share the Internet, using ONE modem, ONE telephone line and ONE Internet Service Provider (ISP). Each user can send and receive e-mail, browse the World Wide Web, play games, chat and download files simultaneously and independently of each other. Please note, however, that America Online (AOL) does not allow multiple users to check e-mail simultaneously. If using AOL only the host station can connect to AOL and browse the Internet. Once the host is connected to AOL, the station user can bring up Internet Explorer and both users can then browse the Internet.

10.2. Setting up a Dial-up Connection

This section is intended for users who currently use the Internet and already have an account. Under each user's profile, a dial-up connection may be personalized with their own login name and password.

Step 1

Double-click on the "My Computer" icon, generally located in the top left corner of your Windows desktop.

Step 2

Click on the link "Network and Dial-Up Connection".

Step 3

Make sure that the modem is installed in the Computer system and that it is plugged into a telephone wall outlet.

Step 4

Follow the screen instructions.

NOTE: If a successful telephone connection is not made, the user name and password will not be saved until a valid connection has taken place.

11. Sharing the Internet Connection in Windows XP Professional or Home Edition

11.1. Simultaneous and Independent Sharing

Two people can simultaneously and independently share the Internet, using ONE modem, ONE telephone line and ONE Internet Service Provider (ISP). Each user can send and receive e-mail, browse the World Wide Web, play games, chat and download files simultaneously and independently of each other. Please note, however, that America Online (AOL) does not allow multiple users to check e-mail simultaneously. If using AOL only the host station can connect to AOL and browse the Internet. Once the host is connected to AOL, the station user can bring up Internet Explorer and both users can then browse the Internet.

11.2. Setting up a Dial-up Connection

This section is intended for users who currently use the Internet and already have an account. Under each user's profile, a dial-up connection may be personalized with their own login name and password.

Step 1

Double-click on the "My Network Places" icon, generally located in the top left corner of your Windows desktop.

Step 2

Select the option "Set up a home or small office network" under "Network Tasks".

Step 3

Make sure that the modem is installed in the Computer system and that it is plugged into a telephone wall outlet.

Step 4

Follow the screen instructions.

NOTE: If a successful telephone connection is not made, the user name and password will not be saved until a valid connection has taken place.

12. Adding Software or Hardware

Installing new hardware

It is recommended prior to installing any new hardware that the Buddy software first be deactivated. This is most easily done in the Buddy Control Center under the Options menu with the utility Set Configuration. Please refer to the “Menu Options” in the section “Using the Buddy Control Center” of this manual for more detail on the use of this utility.

Installing printers

All printers being installed after the Buddy software is already operational should be installed on the host workstation followed by a reboot to ensure proper recognition and function from both host and Buddy workstations.

13. Problem Solving

13.1. General Guidelines

The following are general guidelines which will assist in properly using and maintaining Buddy

- If you are having trouble getting the additional display to work correctly, make sure that the AGP adapter is the primary display. It is the primary display if the attached monitor is used while the computer is booting. If it is not, you should change the BIOS option in the BIOS setup screen. When editing the “Primary Display” option. You should make sure that it says “AGP” and not “PCI”. Some BIOSs have slightly different wording; some do not have this option. If the BIOS does not have this option, it may be possible for Buddy to work, however the use of such machines is not recommended.
- Always install and uninstall programs on the Computer when Buddy stations are not in use.
- Try to schedule the use of floppy disk drives for times when the usage of Buddy is at a minimum. Use of floppy drives may cause momentary slow-downs of the system.
- If a monitor, keyboard or mouse is replaced, shut down then restart the Buddy Station.
- The Buddy Station will not work unless all three devices are attached (monitor, keyboard and mouse).
- If an error message occurs when users try to simultaneously initiate a print job, try printing again.
- If a system configuration makes using peripherals difficult from a Buddy Station, try using the Computer’s console for these functions. For example, if there is trouble printing from a Buddy Station, try printing from the Host workplace.
- DO NOT shut down the Computer while any games are running.
- Installing the Buddy software interferes with the Windows Multi-monitor support. Some video drivers “complain” about this interference by displaying the yellow exclamation point next to the appearance of the video adapter (in both the Windows Device Manager as well as the Buddy Control Center’s Hardware list). Most of the time this is normal and does not prevent Buddy from working properly.

14. Updating Buddy

If you wish to update your Buddy software to the most recent version, you can so by downloading it from our web site.

1. Download the Buddy demo from <http://www.thinsoftinc.com>. Once this file is saved onto your hard disk, locate it and double-click the filename. It will extract into a folder called: Buddy Download located on the C: drive. If this folder does not already exist, you will be prompted to allow it to be created.
2. You need not have to uninstall the current Buddy software prior to re-installing the latest Buddy software.
3. Double-click on the My Computer icon. Double-click on the C: drive icon. Double-click on the Buddy Download folder. Double-click on the Setup icon (the one with the picture of a computer monitor with a box in front of it).
4. Follow the instructions on the screen.
5. Depending on what Windows options have already been installed, on some systems the Buddy installation may require additional files from the Windows CD so be sure to have the Windows CD handy when installing Buddy.
6. Restart the computer after successfully installing the Buddy software.

You have now successfully updated your Buddy software to the most recent version.

15. Technical Support

Technical support offered by ThinSoft (USA) Inc.

Buddy products must be registered with ThinSoft before technical support may be offered. Registration may be completed by registering online at our World Wide Web site. Free support is offered for sixty (60) days from the date of registration. Our technical staff is available to answer questions, troubleshoot problems and to assist in the installation of Buddy products. Before requesting technical support, please be prepared to provide information including the date and place of purchase and product serial number (_____).

<http://www.thinsoftinc.com>

ThinSoft (USA) Inc.
4770 San Pablo Ave, Unit A
Emeryville, California 94608
U.S.A.
e-mail: support@thinsoftinc.com

U.S. (California)
Fax: (510) 450-0173

Singapore
Fax: 65-62897308

Support hours at both locations are 9:00 to 5:30 local time.