


DTK COMPUTER, INC.
 PII-151B

Card Type Floppy drive controller
Chipset/Controller Unidentified
I/O Options Floppy drive interface
Maximum DRAM N/A

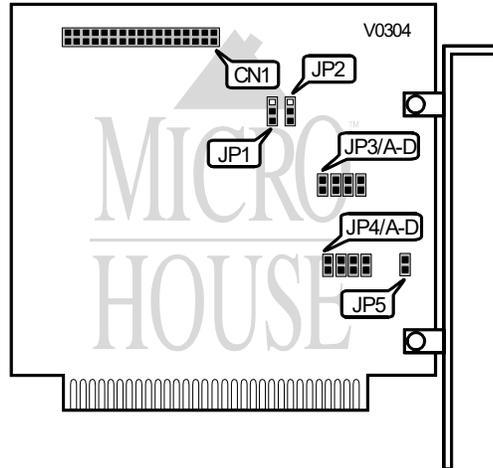

CONNECTIONS	
Purpose	Location
Floppy drive interface	CN1

FLOPPY DRIVE SPEED SELECT	
Speed	JP1
Single	Pins 1 & 2 closed
Dual	Pins 2 & 3 closed

DRIVE TYPE SELECTION				
Type	DRIVE A		DRIVE B	
	JP3/A	JP3/B	JP3/C	JP3/D
360KB	Closed	Closed	Closed	Closed
720KB	Open	Closed	Open	Closed
1.2MB	Closed	Open	Closed	Open
1.44MB	Open	Open	Open	Open

Continued on next page . . .

DTK COMPUTER, INC.
PII-151B

... continued from previous page

ROM ADDRESS SELECTION				
Address	JP4/A	JP4/B	JP4/C	JP4/D
CA000h-CBFFFh	Closed	Open	Closed	Open
CC000h-CDFFFh	Open	Closed	Open	Closed
CE000h-CFFFFh	Closed	Open	Open	Closed

ON-CARD BIOS CONFIGURATION	
BIOS	JP5
Enabled	Closed
Disabled	Open

DATA RATE PRECOMPENSATION MODE		
Data Rate (K 3/sec)	Precompensation (ns)	JP2
500	125	Pins 2 & 3 closed
250	125	Pins 2 & 3 closed
300	125	Pins 2 & 3 closed
250	125	Pins 2 & 3 closed
250	125	Pins 2 & 3 closed
1000	83	Pins 2 & 3 closed
1000	83	Pins 2 & 3 closed
500	125	Pins 1 & 2 closed
125	250	Pins 1 & 2 closed
125	208	Pins 1 & 2 closed
125	250	Pins 1 & 2 closed
125	250	Pins 1 & 2 closed
1000	83	Pins 1 & 2 closed
1000	83	Pins 1 & 2 closed