


DIALOGIC CORPORATION ANTARES BOARD

Card Type	Telephony
Chipset	Unidentified
Maximum Onboard Memory	Unidentified
I/O Options	PEB/SCbus connector
Data Bus	16-bit ISA
Card Size	Full height, full length

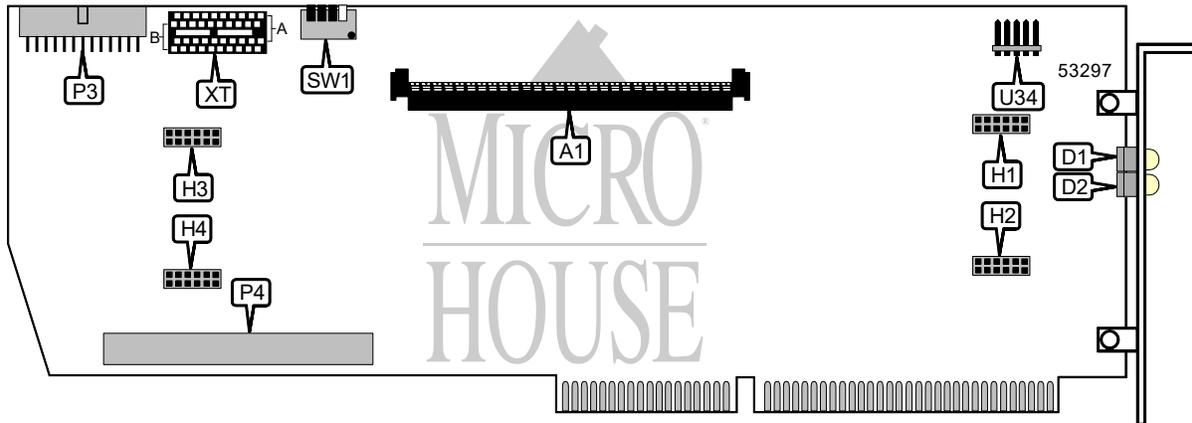

CONNECTIONS			
Function	Label	Function	Label
Header for DSP emulator	H1	PEM bus/SCbus connector	P3
Header for DSP emulator	H2	Daughterboard header	P4
Header for DSP emulator	H3	Dongle connector	U34
Header for DSP emulator	H4		

USER CONFIGURABLE SETTINGS			
Setting	Label	Position	
PEB bus terminated	XT	Position B	
PEB bus not terminated	XT	Not installed	

DRAM CONFIGURATION
The configuration of the memory is unidentified.

Continued on next page . . .

DIALOGIC CORPORATION ANTARES BOARD

... continued from previous page

BASE I/O ADDRESS SELECTION				
Setting	SW1/1	SW1/2	SW1/3	SW1/4
200h	On	On	On	On
208h	Off	On	On	On
210h	On	Off	On	On
218h	Off	Off	On	On
220h	On	On	Off	On
228h	Off	On	Off	On
230h	On	Off	Off	On
238h	Off	Off	Off	On
240h	On	On	On	Off
248h	Off	On	On	Off
250h	On	Off	On	Off
258h	Off	Off	On	Off
260h	On	On	Off	Off
268h	Off	On	Off	Off
270h	On	Off	Off	Off
278h	Off	Off	Off	Off

DIAGNOSTIC LED(S)

The colors and functions of the LEDs are unidentified.