


# PROCOM TECHNOLOGY PICDL HOST ADAPTER

Card Type	CD-ROM interface card
Chip Set	Unidentified
Maximum Onboard Memory	Unidentified
I/O Options	CD-ROM interface, DC power connector, audio in
Hard Drives supported	None
Floppy drives supported	None
Data Bus	8-bit ISA
Card Size	Half-length

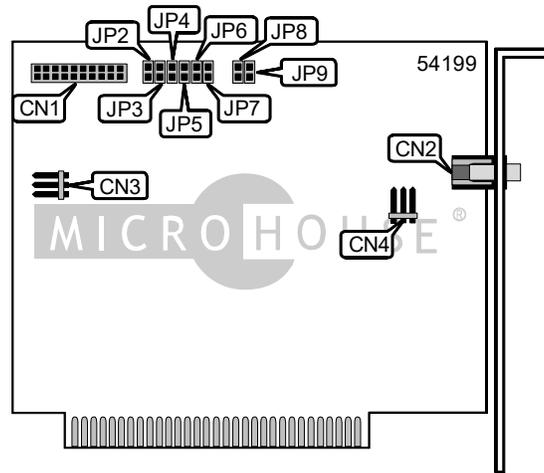

CONNECTIONS			
Function	Label	Function	Label
16-pin internal drive connector	CN1	DC power connector	CN3
Audio in	CN2	Internal audio connector	CN4

BASE I/O ADDRESS SELECTION		
Setting	JP8	JP9
300h	Closed	Closed
310h	Open	Closed
330h	Closed	Open
340h	Open	Open

IRQ INTERRUPT SELECTION						
IRQ	JP2	JP3	JP4	JP5	JP6	JP7
IRQ2	Closed	Open	Open	Open	Open	Open
IRQ3	Open	Closed	Open	Open	Open	Open
IRQ4	Open	Open	Closed	Open	Open	Open
IRQ5	Open	Open	Open	Closed	Open	Open
IRQ6	Open	Open	Open	Open	Closed	Open
IRQ7	Open	Open	Open	Open	Open	Closed

MISCELLANEOUS TECHNICAL NOTES
For use with the PROCOM TECHNOLOGY, PICDL CD-ROM drive